# **GYXTS 12-Core Steel Armored Anti Rodent Fiber Optic** Cable

### **Basic Information**

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: GYXTS-12B1.3 Model Number:

• Minimum Order Quantity: 2km

• Price: negotiable

· Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25days

Payment Terms: 30%TT as deposit,70%Balance before

shipping.

• Supply Ability: 100km



# **Product Specification**


GYXTS-12B1.3 • Item No.: · Armored Type: Steel Tape

• Strength Member: Steel Wire Surround

PΕ Jacket Material: · Application: Pipeline • Warranty Period: 25 Years


• Highlight: **GYXTS Steel Wires Fiber Optic Cable,** 

12 Cores Fiber Optic Cable



# More Images







### Anti Rodent Fiber Optic Cable 12 Cores GYXTS Steel Wires Surround

### **Product Specifications**

Attribute	Value
Item No.	GYXTS-12B1.3
Armored Type	Steel Tape
Strength Member	Steel Wire Surround
Jacket Material	PE
Application	Pipeline
Warranty Period	25 years

### **Product Description**

The GYXTS Armored Fiber Optic Cable features a PE Sheath, A-Grade Fiber, and superior rodent protection. Designed for durability and stability in demanding environments, this cable offers reliable and efficient communication transmission for various applications.



### **Key Features**

**Central Loose Tube Design:** Optical fibers housed securely within a central loose tube for enhanced transmission performance.

**Steel Wire Armoring:** High-strength steel wire armor protects against mechanical damage and external pressure.

Rodent Protection: Armored layer acts as a natural shield against rodent attacks.

PE Outer Sheath: Provides superior resistance to moisture, UV rays, and extreme weather conditions.

A-Grade Fiber: Low attenuation and signal loss for high-speed, stable, long-distance data transmission.

Customizable Options: Available in configurations from 2 to 24 fibers to meet various network requirements.

### **Technical Specifications**

Fiber Count	Nominal Diameter (mm)	Nominal Weight (kg/km)	Max Fiber Per Tube	Tube Diameter (mm)	Allowable Tensile Load Long/Short (N)	Allowable Crush Resistance Long/Short (N/10cm)	
2-6	6.8	60	2-6	2.5	1000/600	600/300	
8-12	7.3	70	8-12	3.0	1000/600	600/300	
14-24	7.8	83	14-23	3.6	1000/600	600/300	
> 24	Available upon customer's request						

### **Applications**

Telecommunications Networks: Backbone networks, metropolitan area networks (MAN), and access networks

Industrial Cabling: Factories, mines, and other harsh environments

Railway and Highway Communication Systems: Long-distance reliable communication Underground Duct Installations: Resistant to rodent damage and external pressure

### Why Choose Our Optical Cable?

Manufacturing Excellence: High-tech enterprise with factory-direct quality assurance

A-Grade Fiber: Superior performance with low signal attenuation


PE Sheath: Robust environmental protection and durability

Custom Solutions: Flexible customization to meet specific needs

Global Service: Reliable partner for fiber optic communication solutions worldwide

### **Production Supplier Profile**



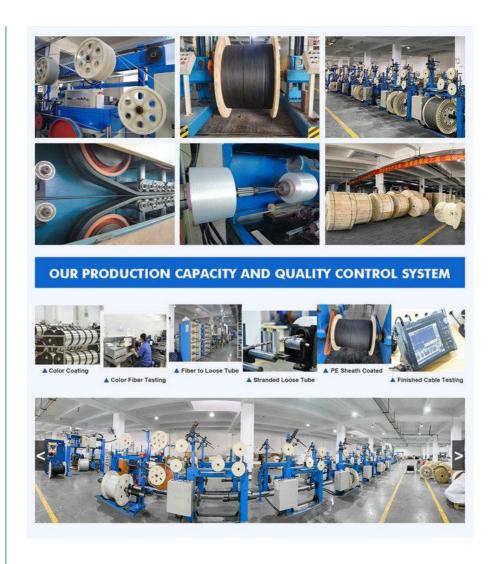

### How to Place an OEM or Customized Order

- 1. Send your purchase intention to our email: cotton@fibercablepuls.com
- 2. Our sales team will contact you to confirm product specifications, packaging, printing, quantity, and other details
- 3. Sign the contract or Proforma Invoice
- 4. After receiving your deposit, we will arrange production
- 5. 2 weeks before production completion, we will notify you to start shipping arrangements



# guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com