



# ADSS Fiber Optic Cable Single Mode 24 Core Aerial Outdoor PE Sheath

### **Basic Information**

Place of Origin: GUANGZHOU/CHINABrand Name: PUNAISGD/CABLEPULS

• Certification: ISO/CE/ROSH

Model Number: ADSS-36b1.3-SJ-300M

Minimum Order Quantity: 2kmPrice: negotiate

Packaging Details: Wooden Spool Φ1200\*750mm

• Delivery Time: 5-25days

Payment Terms: 30%TT as deposit,70%Balance before

shipping.

• Supply Ability: 100km



### **Product Specification**

• Type: ADSS-36b1.3-SJ-300M

• Fiber Type: Single Mode

• Fiber Count: 6/12/24/36/48/72/96/144

Oute Sheath: Black PE
 Inner Sheath Material: PE/AT
 Installation Method: Aerial

• Strength Member Material: FRP/ARMID YARN

• Cable Diameter: 12.5mm

• Highlight: Long Span ADSS Fiber Optic Cable,

Outdoor ADSS Fiber Optic Cable, 24 core ADSS Fiber Optic Cable



# More Images





Our Product Introduction

#### 24core Outdoor Optical Fiber Cable ADSS Single Mode With Long Span Fiber Optic Cable

#### **Product Specifications**

Attribute	Value
Туре	ADSS-36b1.3-SJ-300M
Fiber Type	Single mode
Fiber Count	6/12/24/36/48/72/96/144
Outer Sheath	Black PE
Inner Sheath Material	PE/AT
Installation Method	Aerial
Strength Member Material	FRP/ARMID YARN
Cable Diameter	12.5mm

#### **Product Description**

ADSS Fiber Optic Cable features 1.250µm Coloured Fiber with PBT loose tube and tube filling compound (GeI) for optimal protection. The cable includes PSP corrugated steel tape armored and PE outer sheath for durability.

Excellent mechanical and temperature performance


High strength hydrolysis resistant loose tube

Special tube filling compound for critical fiber protection

Crush resistance and flexibility

PE/LSZH sheath protects against ultraviolet radiation

100% cable core filling

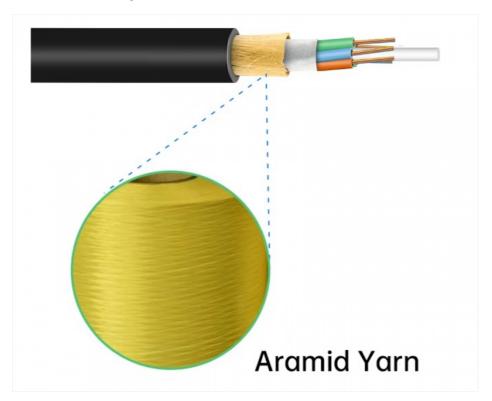

#### **ADSS Cable Ordering Information**

	ber ount	Struc	Fibers per tube	Loose tube diameter (mm)	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mm)	Cable diameter/Height (mm)	Cable weight (kg/km)	
--	-------------	-------	--------------------	--------------------------	--------------------------------	---	----------------------------	----------------------	--

4 1+6 4 1.9±0.1 2.0/2.0 1.6 9.5±0.2	80
-------------------------------------	----

#### **Fiber Parameters**

No.	Items	Unit	Specification
1	Mode Field Diameter 1310nm	μm	9.2±0.4

### **Benefits of ADSS Cable**

Dielectric design eliminates need for metal support structures

Performs reliably near high-voltage power lines without EMI interference

Superior weather resistance and tensile strength for harsh environments

Long-term performance in coastal areas and high altitudes




# **Applications of ADSS Cables**







## **Optical Fiber Hardware for ADSS Cables**

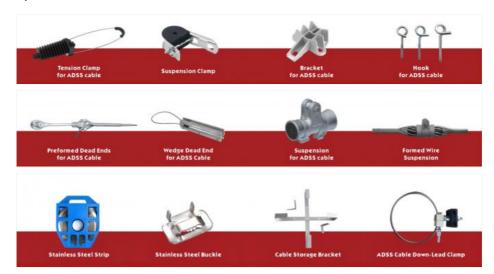

# **Production Supplier Profile**





#### **How to Place an OEM or Customized Order**

Send your purchase intention to our email: cotton@fibercablepuls.com

Our sales team will contact you to confirm product specifications and requirements

Sign the contract or Proforma Invoice

After receiving deposit, we arrange production

2 weeks before completion, we notify you to arrange shipping





+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com