




## 32/48/96 Core G652D Outdoor Types ADSS Fiber Optic Cable 1KM

Our Product Introduction

for more products please visit us on [fiberoptical-cables.com](http://fiberoptical-cables.com)


### Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAI SGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: ADSS-32/48/96b1.3-DJ-300M
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool  $\Phi 1200 \times 750$ mm
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit, 70%Balance before shipping.
- Supply Ability: 100km




### Product Specification

- Type: ADSS Optical Cable-32/48/96b1.3-300m
- Fiber Type: Single Mode
- Fiber Count: 6/12/24/36/48/72/96/144
- Outer Sheath: Black PE
- Inner Sheath Material: PE/AT
- Installation Method: Aerial
- Strength Member Material: FRP/ARMID YARN
- Cable Diameter: 12.5mm
- Highlight: **1KM ADSS Fiber Optic Cable, Outdoor Types ADSS Fiber Optic Cable**



### More Images




### Product Description

#### ADSS Fiber Optic Cable 32/48/96 Core G652D Outdoor Types ADSS Fiber Optic Cable 1KM Price

The features of ADSS cable are following:

1. Specifically designed for large-scale power systems, it is fully insulated dielectric overhead optical cable. Because of the insulation, its structure does not contain any metal materials.
2. The fully insulated structure has a high withstand voltage index standard, which is very conducive to the construction of overhead power lines with live operation, and it does not affect the operation of the line.
3. First of all, it uses aramid yarn material with high tensile strength, which can withstand strong tension, meet the large span requirements of the overhead power lines, and can prevent bird pecks and man-made damage.
4. At the same time, the thermal expansion coefficient of adss optical cable is small. When the temperature changes sharply, the arc degree of the optical cable line changes very little, and its weight is light, so the changes by ice and wind load are also small.

Our Product Introduction

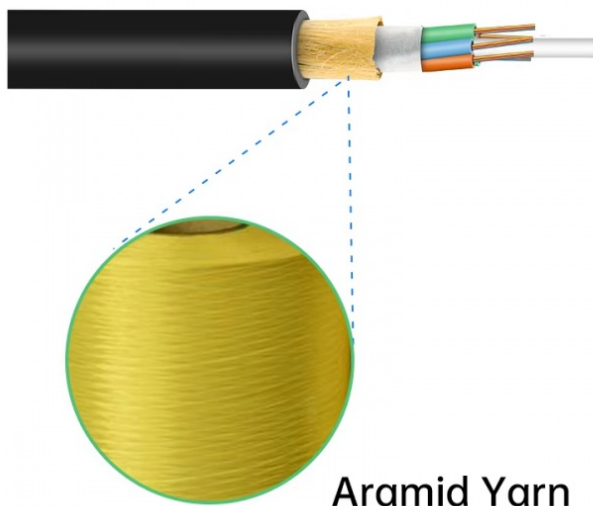

Aramid Yarn

#### ADSS Cable Place Order Information

Fiber count	Structure	Fibers per tube	Loose tube diameter (mm)	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mm)	Cable diameter/Height (mm)	Cable weight (kg/km)
4	1+6	4	1.9±0.1	2.0/2.0	1.6	9.5±0.2	80
6	1+6	6	2.0±0.1	2.0/2.0	1.6	9.8±0.3	80
8	1+6	4	1.9±0.1	2.0/2.0	1.6	9.8±0.3	80
12	1+6	6	2.1±0.1	2.0/2.0	1.6	9.8±0.3	80
24	1+6	12	2.1±0.1	2.0/2.0	1.6	9.8±0.3	80
36	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
48	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
72	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
96	1+8	12	2.2±0.1	2.0/3.4	1.7	11.8±0.3	123
144	1+12	12	2.2±0.1	3.0/6.2	1.7	14.5±0.3	175

#### Fiber Parameters

No.	Items	Unit	Specification
			G.652D
1	Mode Field Diameter	1310nm 1550nm	9.2±0.4 10.4±0.8
2	Cladding Diameter	μm	125.0±1.0
3	Cladding Non-Circularity	%	≤1.0
4	Core-Cladding Concentricity Error	μm	≤0.5
5	Coating Diameter	μm	245±5
6	Coating Non-Circularity	%	≤6.0
7	Cladding-Coating Concentricity Error	μm	≤12.0
8	Cable Cutoff Wavelength	nm	λ <sub>c</sub> ≤1260
9	Attenuation(max.)	1310nm 1550nm 1380nm 1625nm	dB/km dB/km dB/km dB/km
			≤0.35 ≤0.21 ≤0.35 ≤0.24
10	Attenuation and wavelength	1310nm 1285-1330nm 1550nm 1525-1575nm 1550nm 1480-1580nm	dB/km dB/km dB/km
			≤0.04 ≤0.03 ≤0.05
11	Dispersion	1288-1339nm 1271-1360nm 1480-1580nm 1550nm	ps/(nm.km) ps/(nm.km) ps/(nm.km) ps/(nm.km)
			≥-3.5, ≤3.5 ≥-5.3, ≤5.3 ≤20 ≤18
12	Zero dispersion wavelength	Nm	1300-1324
13	Zero dispersion slope	ps/(nm <sup>2</sup> ·km)	≤0.092
14	Typical value	ps/(nm <sup>2</sup> ·km)	0.04
15	Largest individual fiber	Ps/V km	0.2
16	Link design values	Ps/V km	0.1
17	Two way average	1310nm-1550	≤0.01dB

#### Benefits of ADSS Cable

ADSS cables rely solely on their dielectric properties, eliminating the need for metal support structures and reducing installation costs.

Designed to withstand high electric fields, ADSS cables perform reliably near high-voltage power lines without interference from electromagnetic fields.

With superior weather resistance and tensile strength, ADSS cables excel in harsh environments like coastal areas and high altitudes, ensuring long-term performance.




## Applications of ADSS Cables



## Optical Fiber Hardware for ADSS cables



## Production Supplier Profile

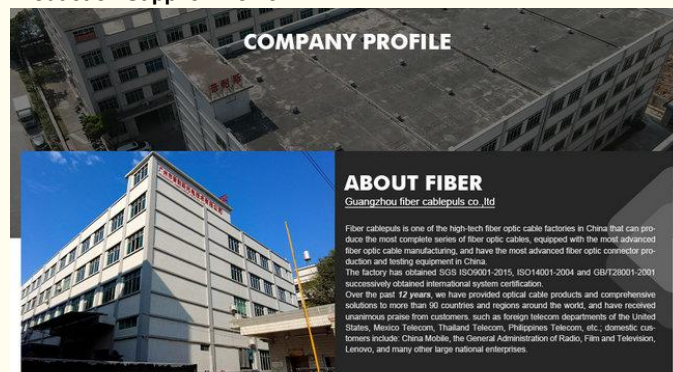

## OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



## How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: [cotton@fibercablepuls.com](mailto:cotton@fibercablepuls.com)
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

