



Multimode ADSS Fiber Optic Cable Single Sheath Double ADSS Power Cable Span 100m 24 Core 48 Core

Our Product Introduction

for more products please visit us on fiberoptical-cables.com

Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: ADSS fiber optic cable
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool $\Phi 1200 \times 750$ mm
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit, 70%Balance before shipping.
- Supply Ability: 100km



Product Specification

- Type: ADSS Fiber Optic Cable
- Fiber Type: Single Mode/multimode
- Fiber Count: 6/12/24/36/48/72/96/144
- Outer Sheath: Black PE
- Inner Sheath Material: PE Black
- Installation Method: Aerial
- Strength Member Material: FRP/ARMID YARN
- Cable Diameter: 12.5mm
- Production Capacity: 200km Per Day
- HS Code: 854470000
- Highlight: 100m ADSS Fiber Optic Cable,
24 Core ADSS Fiber Optic Cable,
Double Sheath ADSS Fiber Optic Cable



Product Description

ADSS Fiber Optic Cable Single Sheath Double ADSS Power Cable Span 100m 24 Core 48 Core Cable

Optic fiber cable specifications


1. Up to 144 fibers
2. Light weight, less additional load to tower. The maximum span can reach 1500m.
3. Strong anti-pull performance, more than 90KN.
4. Non metallic structure provides good insulation, excellent lightning resistant.
5. Equal distribution of aramid yarns with good production process, excellent stress/strain performance.
6. Excellent bullet resistant performance
7. Excellent tracking resistant performance.
8. Installation without power off and the normal transmission of cable won't be influenced by power line fault

ADSS Cable Place Order Information

Fiber count	Structure	Fibers per tube	Loose tube diameter (mm)	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mm)	Cable diameter/Height (mm)	Cable weight (kg/km)
4	1+6	4	1.9±0.1	2.0/2.0	1.6	9.5±0.2	80
6	1+6	6	2.0±0.1	2.0/2.0	1.6	9.8±0.3	80
8	1+6	4	1.9±0.1	2.0/2.0	1.6	9.8±0.3	80
12	1+6	6	2.1±0.1	2.0/2.0	1.6	9.8±0.3	80

Our Product Introduction

24	1+6	12	2.1±0.1	2.0/2.0	1.6	9.8±0.3	80
36	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
48	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
72	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
96	1+8	12	2.2±0.1	2.0/3.4	1.7	11.8±0.3	123
144	1+12	12	2.2±0.1	3.0/6.2	1.7	14.5±0.3	175

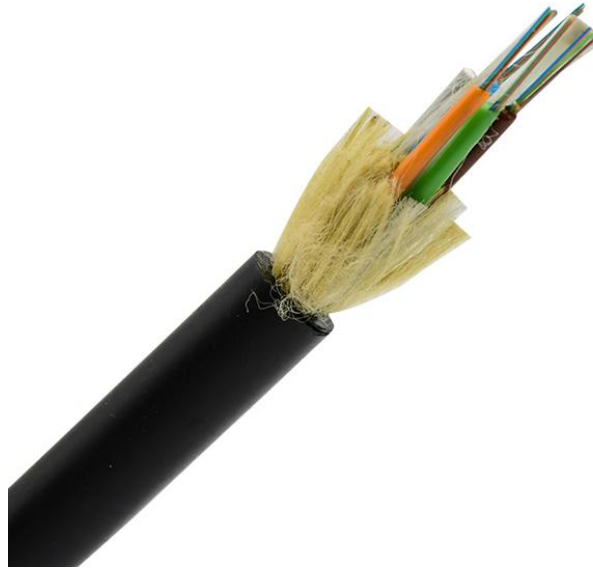

Fiber Parameters				
No.	Items			Unit
				Specificati on
				G.652D
1	Mode Field Diameter	1310nm	μm	9.2±0.4
		1550nm	μm	10.4±0.8
2	Cladding Diameter		μm	125.0±1.0
3	Cladding Non-Circularity		%	≤1.0
4	Core-Cladding Concentricity Error		μm	≤0.5
5	Coating Diameter		μm	245±5
6	Coating Non-Circularity		%	≤6.0
7	Cladding-Coating Concentricity Error		μm	≤12.0
8	Cable Cutoff Wavelength		nm	λ _c ≤1260
9	Attenuation(max.)	1310nm	dB/km	≤0.35
		1550nm	dB/km	≤0.21
		1380nm	dB/km	≤0.35
		1625nm	dB/km	≤0.24
10	Attenuation and wavelength	1310nm 1285-1330nm	dB/km	≤0.04
		1550nm 1525-1575nm	dB/km	≤0.03
		1550nm 1480-1580nm	dB/km	≤0.05
11	Dispersion	1288-1339nm	ps/(nm.km)	≥-3.5, ≤3.5
		1271-1360nm	ps/(nm.km)	≥-5.3, ≤5.3
		1480-1580nm	ps/(nm.km)	≤20
		1550nm	ps/(nm.km)	≤18
12	Zero dispersion wavelength		Nm	1300-1324
13	Zero dispersion slope		ps/(nm ² ·km)	≤0.092
14	Typical value		ps/(nm ² ·km)	0.04
15	Largest individual fiber		Ps/ km	0.2
16	Link design values		Ps/ km	0.1
17	Two way average		1310nm-1550	≤0.01dB

Benefits of ADSS Cable

ADSS cables rely solely on their dielectric properties, eliminating the need for metal support structures and reducing installation costs.

Designed to withstand high electric fields, ADSS cables perform reliably near high-voltage power lines without interference from electromagnetic fields.

With superior weather resistance and tensile strength, ADSS cables excel in harsh environments like coastal areas and high altitudes, ensuring long-term performance.




Applications of ADSS Cables



Optical Fiber Hardware for ADSS cables



Production Supplier Profile

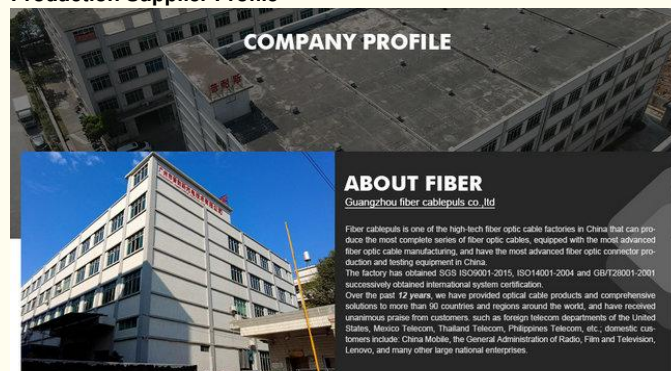

OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan International Guangzhou city, Guangdong province, China



+8613687956390 cotton@fibercabl