




ADSS Fiber Optic Cable 12-144 Core Single Mode G652D Aerial Outdoor

Our Product Introduction


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: ADSS fiber optic cable
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool $\Phi 1200 \times 750$ mm
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit, 70%Balance before shipping.
- Supply Ability: 100km

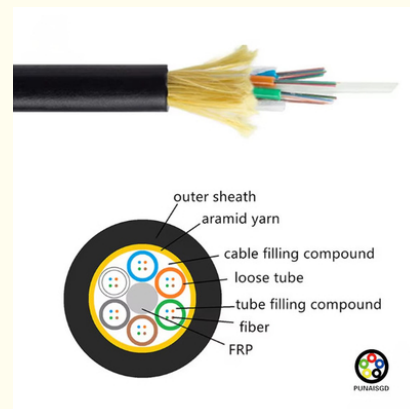

Product Specification

- Type: ADSS Fiber Optic Cable
- Fiber Type: Single Mode/multimode
- Fiber Count: 6/12/24/36/48/72/96/144
- Outer Sheath: Black PE /AT
- Installation Method: Aerial
- Strength Member Material: FRP/ARMID YARN
- Production Capacity: 200km Per Day
- HS Code: 854470000
- Highlight: **1KM ADSS FIBER OPTIC CABLE,
Black ADSS FIBER OPTIC CABLE,
Outdoor Type ADSS FIBER OPTIC CABLE**

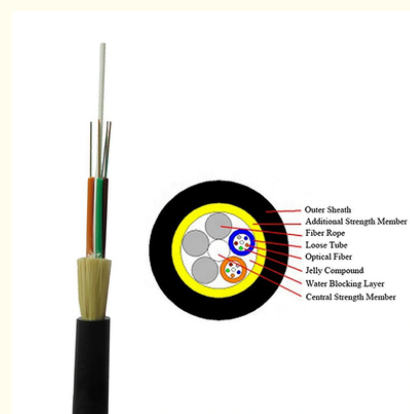

for more products please visit us on fiberoptical-cables.com

Product Description

ADSS Fiber Optic Cable 12/24/48/96 Core

Aerial Single Mode Fiber Optic Cable G652D Outdoor Type

All-Dielectric Self-Supporting (ADSS) fiber optic cable with 1KM span capability and 200m HDPE single outer jacket in black.

Product Specifications

Attribute	Value
Type	ADSS fiber optic cable
Fiber Type	Single mode/multimode
Fiber Count	6/12/24/36/48/72/96/144
Outer Sheath	Black PE /AT
Installation Method	Aerial
Strength Member Material	FRP/ARMID YARN
Production Capacity	200km Per Day
HS Code	854470000

Product Description

ADSS (All-Dielectric Self-Supporting) fiber optic cable is a non-metallic cable designed for aerial installation without requiring support wires or messenger cables. Ideal for both distribution and transmission environments, including live-line installations, ADSS cables enable simple, single-pass installation for economical fiber network deployment.



Technical Specifications

Fiber count	Structure	Fibers per tube	Loose tube diameter (mm)	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mm)	Cable diameter/Height (mm)	Cable weight (kg/km)
4	1+6	4	1.9±0.1	2.0/2.0	1.6	9.5±0.2	80
6	1+6	6	2.0±0.1	2.0/2.0	1.6	9.8±0.3	80
8	1+6	4	1.9±0.1	2.0/2.0	1.6	9.8±0.3	80
12	1+6	6	2.1±0.1	2.0/2.0	1.6	9.8±0.3	80
24	1+6	12	2.1±0.1	2.0/2.0	1.6	9.8±0.3	80
36	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
48	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
72	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
96	1+8	12	2.2±0.1	2.0/3.4	1.7	11.8±0.3	123
144	1+12	12	2.2±0.1	3.0/6.2	1.7	14.5±0.3	175

Fiber Parameters (G.652D)

No.	Items	Unit	Specification
1	Mode Field Diameter	1310nm μm 1550nm μm	9.2±0.4 10.4±0.8
2	Cladding Diameter	μm	125.0±1.0
3	Cladding Non-Circularity	%	≤1.0
4	Core-Cladding Concentricity Error	μm	≤0.5
5	Coating Diameter	μm	245±5
6	Coating Non-Circularity	%	≤6.0
7	Cladding-Coating Concentricity Error	μm	≤12.0
8	Cable Cutoff Wavelength	nm	λcc≤1260
9	Attenuation(max.)	1310nm dB/km 1550nm dB/km 1380nm dB/km 1625nm dB/km	≤0.35 ≤0.21 ≤0.35 ≤0.24
10	Attenuation and wavelength	1310nm 1285-1330nm dB/km 1550nm 1525-1575nm dB/km 1550nm 1480-1580nm dB/km	≤0.04 ≤0.03 ≤0.05
11	Dispersion	1288-1339nm ps/(nm.km) 1271-1360nm ps/(nm.km) 1480-1580nm ps/(nm.km) 1550nm ps/(nm.km)	≥-3.5, ≤3.5 ≥-5.3, ≤5.3 ≤20 ≤18
12	Zero dispersion wavelength	Nm	1300-1324
13	Zero dispersion slope	ps/(nm2*km)	≤0.092
14	Typical value	ps/(nm2*km)	0.04
15	Largest individual fiber	Ps/√ km	0.2
16	Link design values	Ps/√ km	0.1
17	Two way average	1310nm-1550	≤0.01dB

Key Benefits

- Dielectric construction eliminates need for metal support structures, reducing installation costs
- Designed to withstand high electric fields near power lines without electromagnetic interference
- Superior weather resistance and tensile strength for harsh environments including coastal areas and high altitudes
- Long-term performance reliability with minimal maintenance requirements



Applications

- Overhead power line communications
- Telecommunication network infrastructure
- Rural broadband deployment
- Utility company communications
- Long-distance network connections






Compatible Hardware



Manufacturing Capabilities

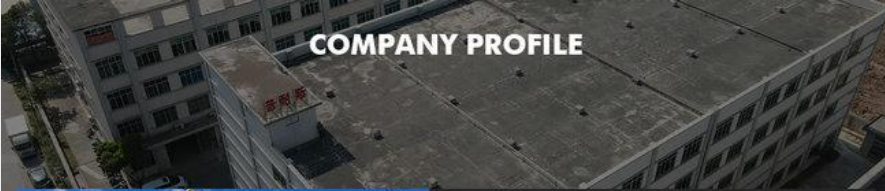

COMPANY PROFILE



ABOUT FIBER
Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001-2015, ISO14001-2004 and GB/T28001-2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lantovo, and many other large national enterprises.



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



Ordering Information

Send your purchase intention to our email: cotton@fibercablepuls.com

Our sales team will contact you to confirm product specifications, packaging, printing, quantity, and other requirements

Sign the contract or Proforma Invoice

After receiving your deposit, we will begin production

Two weeks before production completion, we will notify you to arrange shipping



guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan International Guangzhou city, Guangdong province, China