




ADSS FIBER OPTIC CABLE Stranded G652D 32/48/96 Core Optic Fiber ADSS Cable

Our Product Introduction

for more products please visit us on fiberoptical-cables.com


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAIISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: ADSS fiber optic cable
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool $\Phi 1200 \times 750$ mm
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit, 70%Balance before shipping.
- Supply Ability: 100km



Product Specification

- Type: ADSS Fiber Optic Cable
- Fiber Type: Single Mode/multimode
- Fiber Count: 6/12/24/36/48/72/96/144
- Outer Sheath: Black PE /AT
- Installation Method: Aerial
- Strength Member Material: FRP/ARMID YARN
- Production Capacity: 200km Per Day
- HS Code: 854470000
- Transport Package: Wooden Drum Or As Per Customer's Request
- Structure: Multi-Strand
- Highlight: 32 Core ADSS Fiber Optic Cable, 96 Core ADSS Fiber Optic Cable, Stranded ADSS Fiber Optic Cable



Product Description

ADSS FIBER OPTIC CABLE Fiber Optic Cable Stranded G652D 32/48/96 Core Optic Fiber ADSS Cable


ADSS cable is a type of fiber optic cable that is strong enough to support itself between structures without containing conductive metal elements. Both single mode and multimode fibers can be arranged in ADSS cables with a maximum of 144 fibers. ADSS fiber optic cable is designed for outside plant aerial and duct applications in local and campus network loop architectures from pole-to-building to town-to-town installations. The cabling system that includes cables, suspension, dead-end, and termination enclosures offers a comprehensive transmission circuit infrastructure with high-reliability performance. The structure of ADSS cable can be divided into two categories—central tube structure and stranded structure. In a central tube design, the fibers are placed in a PBT loose tube filled with water-blocking material within a certain length. Then they are wrapped with aramid yarn according to the desired tensile strength and extruded with PE (≤ 110 KV electric field strength) or AT (≥ 100 KV electric field strength) sheath. This structure features with small diameter and light weight but has limited lengths.

ADSS Cable Place Order Information

Fiber count	Structure	Fibers per tube	Loose tube diameter (mm)	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mm)	Cable diameter/Height (mm)	Cable weight (kg/km)
4	1+6	4	1.9 \pm 0.1	2.0/2.0	1.6	9.5 \pm 0.2	80
6	1+6	6	2.0 \pm 0.1	2.0/2.0	1.6	9.8 \pm 0.3	80
8	1+6	4	1.9 \pm 0.1	2.0/2.0	1.6	9.8 \pm 0.3	80
12	1+6	6	2.1 \pm 0.1	2.0/2.0	1.6	9.8 \pm 0.3	80

Our Product Introduction

24	1+6	12	2.1±0.1	2.0/2.0	1.6	9.8±0.3	80
36	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
48	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
72	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
96	1+8	12	2.2±0.1	2.0/3.4	1.7	11.8±0.3	123
144	1+12	12	2.2±0.1	3.0/6.2	1.7	14.5±0.3	175

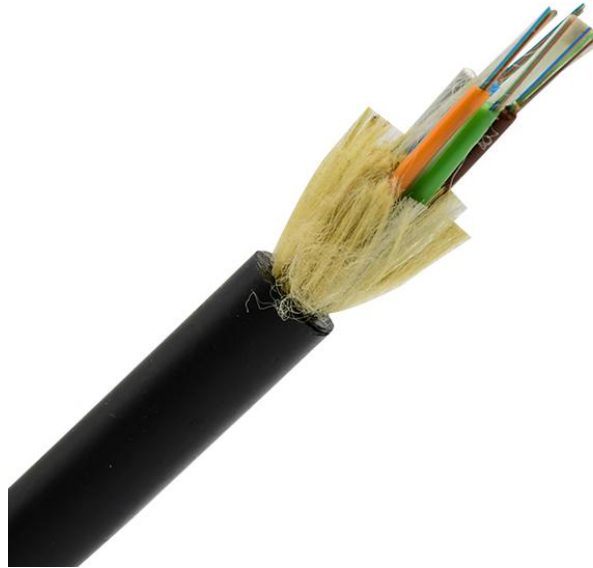

Fiber Parameters				
No.	Items			Unit
				Specification
				G.652D
1	Mode Field Diameter	1310nm	μm	9.2±0.4
		1550nm	μm	10.4±0.8
2	Cladding Diameter		μm	125.0±1.0
3	Cladding Non-Circularity		%	≤1.0
4	Core-Cladding Concentricity Error		μm	≤0.5
5	Coating Diameter		μm	245±5
6	Coating Non-Circularity		%	≤6.0
7	Cladding-Coating Concentricity Error		μm	≤12.0
8	Cable Cutoff Wavelength		nm	λ _c ≤1260
9	Attenuation(max.)	1310nm	dB/km	≤0.35
		1550nm	dB/km	≤0.21
		1380nm	dB/km	≤0.35
		1625nm	dB/km	≤0.24
10	Attenuation and wavelength	1310nm 1285-1330nm	dB/km	≤0.04
		1550nm 1525-1575nm	dB/km	≤0.03
		1550nm 1480-1580nm	dB/km	≤0.05
11	Dispersion	1288-1339nm	ps/(nm.km)	≥-3.5, ≤3.5
		1271-1360nm	ps/(nm.km)	≥-5.3, ≤5.3
		1480-1580nm	ps/(nm.km)	≤20
		1550nm	ps/(nm.km)	≤18
12	Zero dispersion wavelength		Nm	1300-1324
13	Zero dispersion slope		ps/(nm ² ·km)	≤0.092
14	Typical value		ps/(nm ² ·km)	0.04
15	Largest individual fiber		Ps/ km	0.2
16	Link design values		Ps/ km	0.1
17	Two way average		1310nm-1550	≤0.01dB

Benefits of ADSS Cable

ADSS cables rely solely on their dielectric properties, eliminating the need for metal support structures and reducing installation costs.

Designed to withstand high electric fields, ADSS cables perform reliably near high-voltage power lines without interference from electromagnetic fields.

With superior weather resistance and tensile strength, ADSS cables excel in harsh environments like coastal areas and high altitudes, ensuring long-term performance.




Applications of ADSS Cables



Optical Fiber Hardware for ADSS cables



Production Supplier Profile

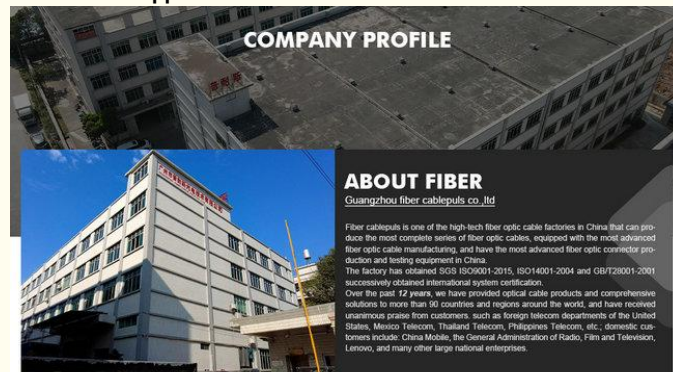

OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan International Guangzhou city, Guangdong province, China



+8613687956390 cotton@fibercabl