ADSS Tension Clamps for Insulating Conductor Cable Hanging

Basic Information

. Place of Origin: **GUANGZHOU/CHINA** Brand Name: PUNAISGD/CABLEPULS

· Certification: ISO/CE/ROSH

Model Number: Tension Clamps for Insulating Conductor

• Minimum Order Quantity: 1 piece • Price: negotiate Packaging Details: catron • Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

. Supply Ability: negotiate



Product Specification

Model: Tension Clamps For Insulating Conductor

· Applications: Hanging Cable · Quantity: 50pcs/Outer Box 25.5kg/Outer Carton Carton Size: . G.Weight: 26.5kg/Outer Carton

Available • OEM: Carton · Package:

. Highlight: Anchoring Clamp Tension Clamps,

Insulating Conductor Tension Clamps



More Images



Anchoring Clamp Tension Clamps For Insulating Conductor

Product Specifications

Attribute	Value	
Model	Tension Clamps for Insulating Conductor	
Applications	Hanging cable	
Quantity	50pcs/Outer box	
Carton Size	25.5kg/Outer Carton	
G.Weight	26.5kg/Outer Carton	
OEM	Available	
Package	Carton	



The anchoring clamp is self-adjusting and designed to anchor ADSS optical fiber cable transmission lines. The ADSS tension clamp consists of self-adjusting plastic wedges which clamp the optical cable without causing damage. A wide range of gripping capacities is achieved by using different types of wedges in the ADSS anchor clamp.

The stainless steel bail allows installation of clamps on pole brackets or hooks, including in seaside areas. The ADSS tension clamp PA-3000 is available either separately or as an assembly with ADSS fiber optic cable brackets and stainless steel band.

Product Features

- Excellent anti-corrosion performance
- Abrasion and wear resistant construction
- Maintenance-free operation
- Strong grip prevents cable slippage
- Lightweight nylon body for easy portability
- Stainless steel wire ensures firm tensile force
- Weather-resistant wedge material
- Tool-free installation with reduced operating time

Applications






- Hanging cable installations
- Pole-mounted fitting applications
- Power and overhead line accessories
- FTTH fiber optic aerial cable systems

Technical Specifications

Model	Cable Diameter (mm)	Break Load (kn)	Material
OYI-PA2000	11-15	8	PA, Stainless Steel

Our Manufacturing Facility



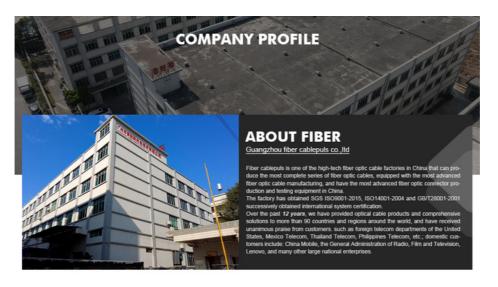













OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM











▲ Finished Cable Testing





TRANSPORT&PAY TRANSPORT&PAY Air Freight Transportation Shipping Delivery









And More.....



















SHIPMENT

PACKAGING

TRUCK LOADING

GOODS RECEIPT



Frequently Asked Questions

Why choose us?

We are the manufacturer located in Guangzhou, China, operating since 2011. We primarily serve the domestic market with a workforce of 11-50 employees in our factory.

How can we guarantee quality?

We provide pre-production samples before mass production and conduct final inspections before shipment to ensure product quality.

Can you send products to my country?

Yes, we can ship worldwide. If you don't have your own shipping forwarder, we can assist with logistics arrangements.

Can you do OEM for me?

We accept all OEM orders. Contact us with your design requirements, and we'll provide competitive pricing and produce samples for your approval.

What services can we provide?

Accepted Delivery Terms: FOB, CIF, EXW

Accepted Payment Currency: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF Accepted Payment Type: T/T, L/C, D/P D/A, PayPal, Western Union, Escrow

Languages Spoken: English, Chinese



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China