



## Aerial HDPE G652D Non Metallic 100m 500m Span 12 24 48 Fiber ADSS Fiber Optic Cable 6km Length

Our Product Introduction

for more products please visit us on [fiberoptical-cables.com](http://fiberoptical-cables.com)

### Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAI SGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: ADSS fiber optic cable 100m
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool  $\Phi 1200 \times 750$ mm
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit, 70%Balance before shipping.
- Supply Ability: 100km



### Product Specification

- Type: ADSS Fiber Optic Cable 100m
- Fiber Type: Single Mode/multimode
- Fiber Count: 12/24/48
- Outer Sheath: Black PE
- Installation Method: Aerial
- Strength Member Material: FRP/ARMID YARN
- Production Capacity: 200km Per Day
- HS Code: 854470000
- Transport Package: Wooden Drum Or As Per Customer's Request
- Specification: 100X100X70 Cm
- Highlight: 500m ADSS Fiber Optic Cable, 100m ADSS Fiber Optic Cable, Aerial HDPE ADSS Fiber Optic Cable



### More Images



### Product Description

#### ADSS FIBER OPTIC CABLE Aerial HDPE G652D Non Metallic 100m 500m Span 12 24 48 Fiber ADSS Fiber Optic Cable 6km Length

ADSS cable is loose tube stranded. Fibers, 250 $\mu$ m, are positioned into a loose tube made of high modulus plastics. The tubes are filled with a water-resistant filling compound. The tubes (and fillers) are stranded around a FRP (Fiber Reinforced Plastic) as a non-metallic central strength member into a compact and circular cable core. After the cable core is filled with filling compound, it is covered with thin PE (polyethylene) inner sheath. After stranded layer of aramid yarns are applied over the inner sheath as strength member, the cable is completed with PE or AT (anti-tracking) outer sheath.


The actual status of overhead power lines is taken into full consideration when ADSS cable is being designed. For overhead power lines under 110kV, PE outer sheath is applied. FOR power lines equal to or over 110kV, AT outer sheath is applied. The dedicate design of aramid quantity and stranding process can satisfy the demand on various spans.

#### ADSS Cable Place Order Information

Fiber count	Structure	Fibers per tube	Loose tube diameter (mm)	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mm)	Cable diameter/Height (mm)	Cable weight (kg/km)
4	1+6	4	1.9 $\pm$ 0.1	2.0/2.0	1.6	9.5 $\pm$ 0.2	80
6	1+6	6	2.0 $\pm$ 0.1	2.0/2.0	1.6	9.8 $\pm$ 0.3	80
8	1+6	4	1.9 $\pm$ 0.1	2.0/2.0	1.6	9.8 $\pm$ 0.3	80
12	1+6	6	2.1 $\pm$ 0.1	2.0/2.0	1.6	9.8 $\pm$ 0.3	80

Our Product Introduction

24	1+6	12	2.1±0.1	2.0/2.0	1.6	9.8±0.3	80
36	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
48	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
72	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
96	1+8	12	2.2±0.1	2.0/3.4	1.7	11.8±0.3	123
144	1+12	12	2.2±0.1	3.0/6.2	1.7	14.5±0.3	175

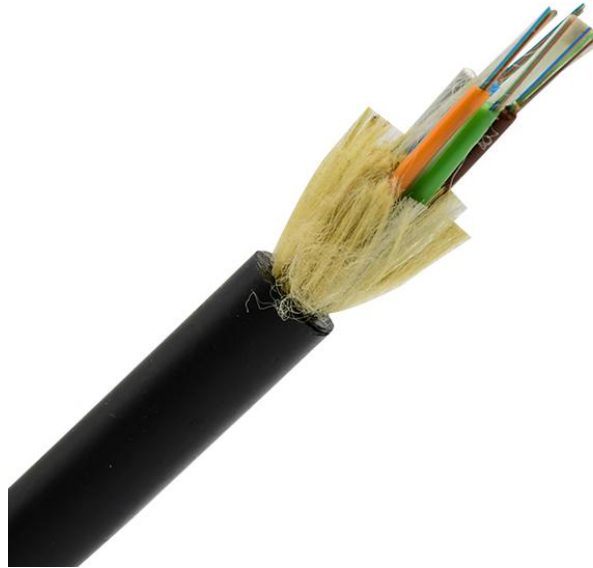

#### Fiber Parameters

No.	Items	Unit	Specification
			G.652D
1	Mode Field Diameter	1310nm 1550nm	μm μm
2	Cladding Diameter		μm
3	Cladding Non-Circularity		%
4	Core-Cladding Concentricity Error		μm
5	Coating Diameter		μm
6	Coating Non-Circularity		%
7	Cladding-Coating Concentricity Error		μm
8	Cable Cutoff Wavelength		nm
9	Attenuation(max.)	1310nm 1550nm 1380nm 1625nm	dB/km dB/km dB/km dB/km
10	Attenuation and wavelength	1310nm 1285-1330nm 1550nm 1525-1575nm 1550nm 1480-1580nm	dB/km dB/km dB/km
11	Dispersion	1288-1339nm 1271-1360nm 1480-1580nm 1550nm	ps/(nm.km) ps/(nm.km) ps/(nm.km) ps/(nm.km)
12	Zero dispersion wavelength		Nm
13	Zero dispersion slope		ps/(nm <sup>2</sup> ·km)
14	Typical value		ps/(nm <sup>2</sup> ·km)
15	Largest individual fiber		Ps/ km
16	Link design values		Ps/ km
17	Two way average		1310nm-1550

#### Benefits of ADSS Cable

ADSS cables rely solely on their dielectric properties, eliminating the need for metal support structures and reducing installation costs.

Designed to withstand high electric fields, ADSS cables perform reliably near high-voltage power lines without interference from electromagnetic fields.

With superior weather resistance and tensile strength, ADSS cables excel in harsh environments like coastal areas and high altitudes, ensuring long-term performance.




#### Applications of ADSS Cables



#### Optical Fiber Hardware for ADSS cables



#### Production Supplier Profile

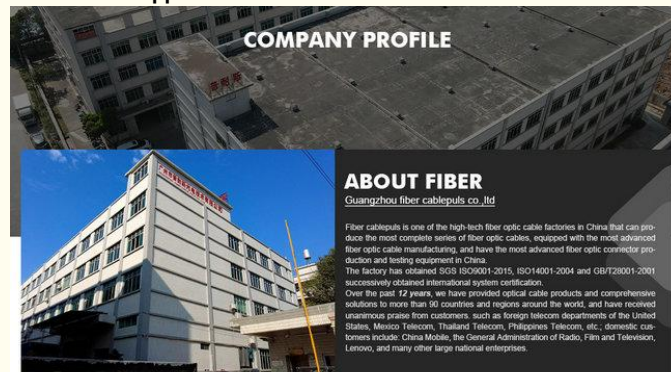

#### OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



#### How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: [cotton@fibercablepuls.com](mailto:cotton@fibercablepuls.com)
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan International Guangzhou city, Guangdong province, China



+8613687956390 cotton@fibercabl