




Aerial Figure 8 Fiber Optic Cable Uni Tube GYXTC8S Optical Fiber Cable Self Supporting 12 Cores

Our Product Introduction

for more products please visit us on fiberoptical-cables.com

Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: gyxtc8y-12B1.3
- Minimum Order Quantity: 2km
- Price: negotiable
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km



Product Specification

- Item NO.: Gyxtc8y-12b1.3
- TYPE: Mini Fig.8 Shape
- Loose Tube Material: PBT
- Strength Member: Aramid Yarn
- Application: OVERHEAD
- Fiber: G652D
- Highlight: Aerial Figure 8 Fiber Optic Cable, Self Supporting Fiber Optic Cable



Product Description

Aerial Figure 8 Fiber Optic Cable Cable Fibra Optica FRP Single Mode 24 Core GYFTY GYTC8S GYXTC8S Fiber Optic Cable

Figure 8 Aerial Fiber Optic Cable GYXTC8S

Suitable for aerial installation except on power lines
Single loose tube filled with thixotropic jelly and centrally placed in the cable
Galvanized, stranded steel wire used as integrated messenger wire
Outer sheath with UV Stabilized HDPE compound
Fiber count 2F-12F (SM Fiber G652D, G657 and OM1, OM2, OM3 OM4)


International Standards :

IEC 60794; IEC 60793; ITU-T Rec. G.650; ITU-T Rec. G.652; ITU-T Rec. G.655;
ITU-T Rec. G.656; ITU-T Rec G.657; EN 187000; Telecordia GR-20 issue 3rd May, 2008

Drum Length :

2000 meters \pm 10% or as per customer's requirement

Our Product Introduction

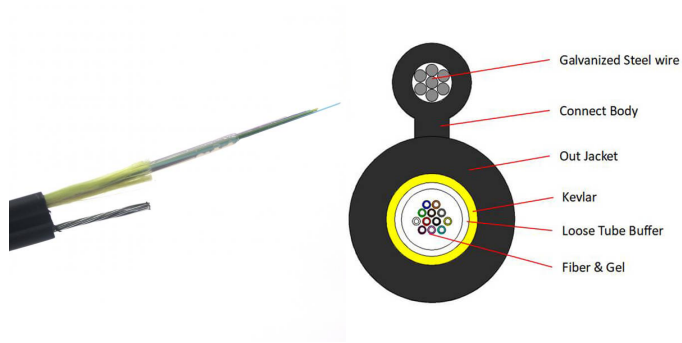

Model: GYXTC8Y
 Messenger: 1.5mm Standed Galvanized Steel
 Messenger for Flexibility
 Fiber : Up to 24 cores, Gel filled
 Jacket: Single HDPE Sheath
 Armor: None
 Tension Strength: 1000(Short term)
 300(Long term)
 Cable Diameter: 5.1*10.2mm
 Package: 4km/drum
 Weight: 47KG/KM

Model: GYXTC8S
 Messenger: 1.5mm Standed Galvanized Steel
 Messenger for Flexibility
 Fiber : Up to 24 cores, Gel filled
 Jacket: Single HDPE Sheath
 Armor: Steel Tape
 Tension Strength: 1000(Short term)
 300(Long term)
 Cable Diameter: 7.6*14.5mm
 Package: 4km/drum
 Weight: 117KG/KM

Model: GYTC8Y
 Messenger: 7*1.0mm Standed Galvanized Steel
 Messenger for Flexibility
 Fiber : Up to 288 cores, Gel filled
 Jacket: Single MDPE Sheath
 Water Block: Water Blocking or Gel-filled
 Armor: None
 Tension Strength: 3000(Short term)
 1000(Long term)
 Cable Diameter: 9.1*16.9mm
 Package: 4km/drum
 Weight: 142KG/KM

Model: GYTC8S

Messenger: 7*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber : Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Aarmor: Steel Tape, Thickness 1mm


Tension Strength: 3000(Short term)

1000(Long term)

Cable Diameter: 9.5*17mm

Package: 4km/drum

Weight: 156KG/KM




- Galvanized Steel Strand
- Jacket Web
- MDPE Outer Jacket
- Corrugated Steel Armor
- Dry or Gel Buffer Tube with Optical Fibers
- Central Strength Member
- Water Blocking Tape
- Ripcord


GYTC8S Cable Place Order Information




Fiber count	6 core 8 core 12 core
Fiber Type:	G652D/G657A1/G657A2
Crush Resistance Long term:	300 (N/100MM)
Crush Resistance Short term:	1000(N/100MM)
Overall Diameter	7.8x4mm
Sheath	PE
Strand Steel wire	7*0.8mm
Sample Status	In stock

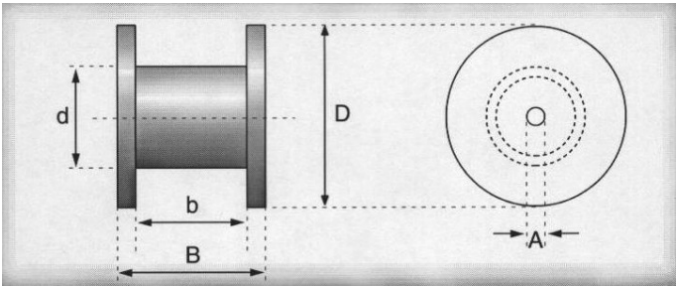

Production Supplier Profile

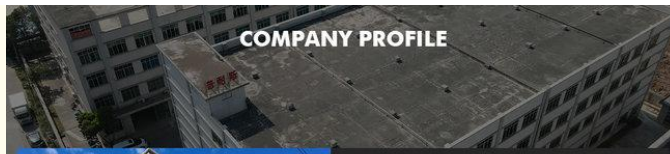

COMPANY PROFILE



ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001-2015, ISO14001-2004 and GB/T28001-2001 successfully obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan International Guangzhou city, Guangdong province, China