



GYXTC8S Aerial Figure 8 Fiber Optic Cable 12 Core G652D

Basic Information

Place of Origin: GUANGZHOU/CHINABrand Name: PUNAISGD/CABLEPULS

Certification: ISO/CE/ROSHModel Number: gyxtc8y-12B1.3

• Minimum Order Quantity: 2km

• Price: negotiable

Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25days

Payment Terms: 30%TT as deposit,70%Balance before

shipping.

• Supply Ability: 100km



Product Specification

Item NO.: Gyxtc8y-12b1.3TYPE: Mini Fig.8 Shape

• Loose Tube Material: PBT

Strength Member: Aramid YarnApplication: OVERHEADFiber: G652D

Highlight: Aerial Figure 8 Fiber Optic Cable,
Self Supporting Fiber Optic Cable



Aerial Figure 8 Fiber Optic Cable Uni Tube GYXTC8S Optical Fiber Cable Self Supporting 12 Cores

Product Specifications

Attribute	Value
Item NO.	gyxtc8y-12b1.3
ТҮРЕ	mini Fig.8 shape
Loose Tube Material	РВТ
Strength member	aramid yarn
Application	OVERHEAD
fiber	G652D

Product Description

Aerial Figure 8 Fiber Optic Cable GYXTC8S with FRP reinforcement and single mode 24 core configuration.

Suitable for aerial installation (excluding power lines)

Single loose tube filled with thixotropic jelly and centrally placed

Galvanized, stranded steel wire integrated messenger wire

UV Stabilized HDPE compound outer sheath

Fiber count options: 2F-12F (SM Fiber G652D, G657 and OM1, OM2, OM3, OM4)


Compliance Standards

IEC 60794; IEC 60793; ITU-T Rec. G.650; ITU-T Rec. G.652; ITU-T Rec. G.655; ITU-T Rec. G.656; ITU-T Rec G.657; EN 187000; Telecordia GR-20 issue 3rd May, 2008

Drum Length

2000 meters ± 10% or customized to customer requirements



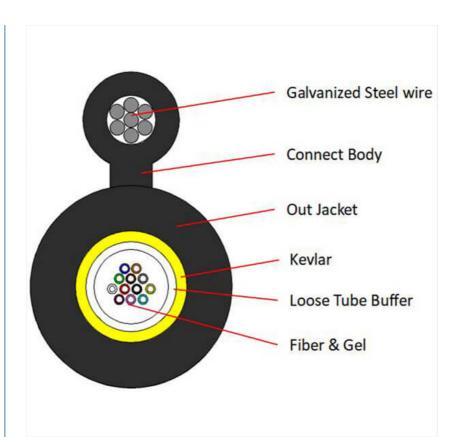





Model: GYXTC8S

Messenger: 1.5mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 24 cores, Gel filled Jacket: Single HDPE Sheath


Armor: Steel Tape


Tension Strength: 1000(Short term)

300(Long term)

Cable Diameter: 7.6*14.5mm

Package: 4km/drum Weight: 117KG/KM





Model: GYTC8Y

Messenger: 7*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Armor: None

Tension Strength: 3000(Short term)

1000(Long term)

Cable Diameter: 9.1*16.9mm

Package: 4km/drum Weight: 142KG/KM

Model: GYTC8S

Messenger: 7*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Armor: Steel Tape, Thickness 1mm Tension Strength: 3000(Short term)

1000(Long term)

Cable Diameter: 9.5*17mm


Package: 4km/drum Weight: 156KG/KM



GYTC8S Cable Order Information



Specification	Details
Fiber count	6 core, 8 core, 12 core
Fiber Type	G652D/G657A1/G657A2
Crush Resistance (Long term)	300 (N/100MM)
Crush Resistance (Short term)	1000(N/100MM)
Overall Diameter	7.8x4mm
Sheath	PE
Strand Steel wire	7*0.8mm
Sample Status	In stock

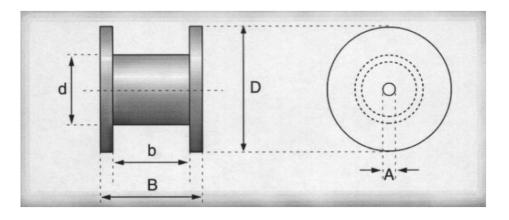

Supplier Information





Custom Order Process

Send purchase requirements to cotton@fibercablepuls.com

Our sales team will confirm product specifications, packaging, and quantity

Sign contract or Proforma Invoice

Production begins after deposit receipt

Shipping coordination starts 2 weeks before production completion







925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China