




ADSS Fiber Optic Cable ADSS Cable All Dielectric Self-Supporting 12 24 48 96 144 Core Double Jacket G652D Outdoor

Our Product Introduction

for more products please visit us on fiberoptical-cables.com


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: ADSS-72b1.3-DJ-200M
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool $\Phi 1200 \times 750\text{mm}$
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit, 70%Balance before shipping.
- Supply Ability: 100km



Product Specification

- Type: ADSS Optical Cable-72b1.3-200m
- Fiber Type: Single Mode
- Fiber Count: 6/12/24/36/48/72/96/144
- Outer Sheath: Black PE
- Inner Sheath Material: PE/AT
- Installation Method: Aerial
- Strength Member Material: FRP/ARMID YARN
- Cable Diameter: 12.5mm
- Highlight: 144 Core ADSS Fiber Optic Cable, Double Jacket ADSS Fiber Optic Cable, Outdoor ADSS Fiber Optic Cable



Product Description

ADSS Fiber Optic Cable ADSS Cable All Dielectric Self-Supporting 12 24 48 96 144 Core Double Jacket G652D Outdoor

Description

Product Construction
Fiber: 250 μm colored fiber 2-288 fibers
Fiberglass reinforced plastic (FRP)
Aramid yarn strength member
Outer Jacket: Black UV and waterproof polyethylene (PE)


Features

All dielectric structure Up to 288 fibers.
Loose tube gel-filled construction for superior fiber protection.
Overall fiberglass reinforced yarn provides high tensile strength.

Applications

Inter building voice or data communication backbones.
Installed as aerial/lashed, ducts, underground conduits.
For overhead power lines under 110kV, PE outer sheath is applied.
For power lines equal to or over 110kV, AT outer sheath is applied.

Our Product Introduction

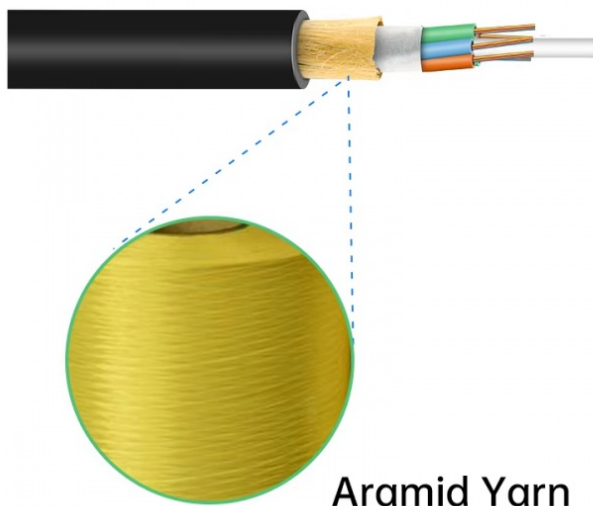

Aramid Yarn

ADSS Cable Place Order Information

Fiber count	Structure	Fibers per tube	Loose tube diameter (mm)	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mm)	Cable diameter/Height (mm)	Cable weight (kg/km)
4	1+6	4	1.9±0.1	2.0/2.0	1.6	9.5±0.2	80
6	1+6	6	2.0±0.1	2.0/2.0	1.6	9.8±0.3	80
8	1+6	4	1.9±0.1	2.0/2.0	1.6	9.8±0.3	80
12	1+6	6	2.1±0.1	2.0/2.0	1.6	9.8±0.3	80
24	1+6	12	2.1±0.1	2.0/2.0	1.6	9.8±0.3	80
36	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
48	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
72	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
96	1+8	12	2.2±0.1	2.0/3.4	1.7	11.8±0.3	123
144	1+12	12	2.2±0.1	3.0/6.2	1.7	14.5±0.3	175

Fiber Parameters

No.	Items	Unit	Specification
1	Mode Field Diameter	1310nm	μm
		1550nm	μm
2	Cladding Diameter		μm
3	Cladding Non-Circularity		%
4	Core-Cladding Concentricity Error		μm
5	Coating Diameter		μm
6	Coating Non-Circularity		%
7	Cladding-Coating Concentricity Error		μm
8	Cable Cutoff Wavelength		nm
9	Attenuation(max.)	1310nm	dB/km
		1550nm	dB/km
		1380nm	dB/km
		1625nm	dB/km
10	Attenuation and wavelength	1310nm 1285-1330nm	dB/km
		1550nm 1525-1575nm	dB/km
		1550nm 1480-1580nm	dB/km
11	Dispersion	1288-1339nm	ps/(nm.km)
		1271-1360nm	ps/(nm.km)
		1480-1580nm	ps/(nm.km)
		1550nm	ps/(nm.km)
12	Zero dispersion wavelength	Nm	
13	Zero dispersion slope	ps/(nm ² ·km)	
14	Typical value	ps/(nm ² ·km)	
15	Largest individual fiber	Ps/ km	
16	Link design values	Ps/ km	
17	Two way average	1310nm-1550	dB

Benefits of ADSS Cable

ADSS cables rely solely on their dielectric properties, eliminating the need for metal support structures and reducing installation costs.

Designed to withstand high electric fields, ADSS cables perform reliably near high-voltage power lines without interference from electromagnetic fields.


With superior weather resistance and tensile strength, ADSS cables excel in harsh environments like coastal areas and high altitudes, ensuring long-term performance.




Applications of ADSS Cables



Optical Fiber Hardware for ADSS cables

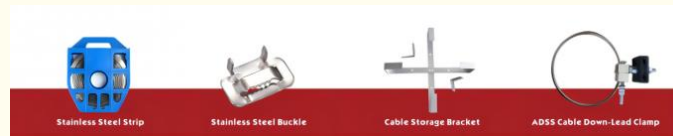

Production Supplier Profile

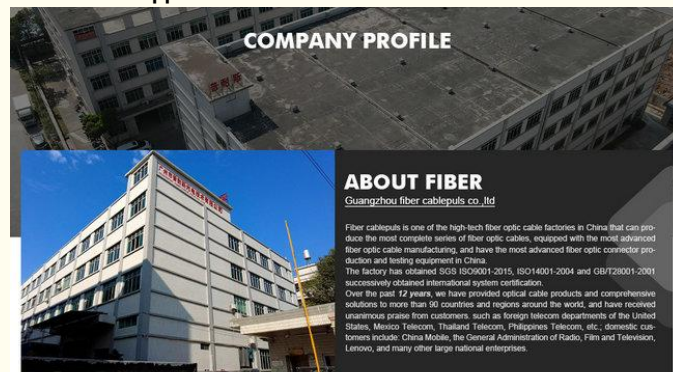

OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.



+8613687956390

cotton@fibercabl

