



guangzhou fiber cablepuls co ltd
fiberoptical-cables.com




Manufacturer Fiber Optic Cable ADSS 12 Core Single Mode Black PE Outer Sheath

Our Product Introduction

for more products please visit us on fiberoptical-cables.com


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAI SGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: ADSS-12b1.3-SJ-100M
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool $\Phi 1200 \times 750$ mm
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit, 70%Balance before shipping.
- Supply Ability: 100km



Product Specification

- Type: ADSS Optical Cable-12b1.3-100m
- Fiber Type: Single Mode
- Fiber Count: 6/12/24/36/48/72/96/144
- Outer Sheath: Black PE
- Inner Sheath Material: PE/AT
- Installation Method: Aerial
- Strength Member Material: FRP/ARMID YARN
- Cable Diameter: 12.5mm
- Highlight: 12 Core ADSS Fiber Optic Cable, Single Mode ADSS Fiber Optic Cable, Fiber Optic Cable ADSS



Product Description

ADSS Fiber Optic Cable Manufacturer Fiber Optic Cable ADSS 12 Core Single Mode ADSS Fiber Optic Cable

1. All-Dielectric Construction

No Metal Components: ADSS cables are made entirely of non-metallic materials, which makes them immune to electromagnetic interference (EMI) and safe to use in high-voltage environments.


Lightweight: The absence of metal makes ADSS cables lighter and easier to handle during installation.

2. Self-Supporting

Tensile Strength: ADSS cables have high tensile strength, allowing them to span long distances between poles without sagging or requiring additional support.

Integrated Strength Members: The cables are designed with integrated strength members, often made of aramid yarn or similar materials, which provide the necessary mechanical support.

Our Product Introduction

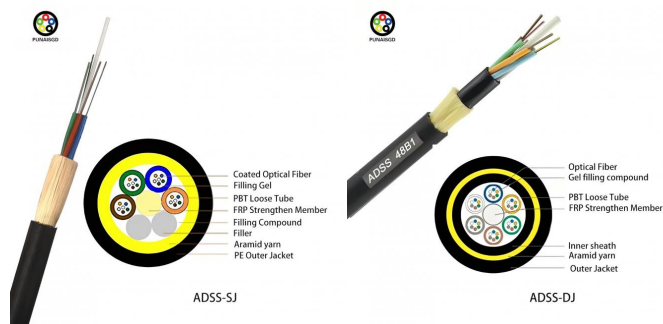

ADSS Cable Place Order Information

Fiber count	Structure	Fibers per tube	Loose tube diameter (mm)	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mm)	Cable diameter/Height (mm)	Cable weight (kg/km)
4	1+6	4	1.9±0.1	2.0/2.0	1.6	9.5±0.2	80
6	1+6	6	2.0±0.1	2.0/2.0	1.6	9.8±0.3	80
8	1+6	4	1.9±0.1	2.0/2.0	1.6	9.8±0.3	80
12	1+6	6	2.1±0.1	2.0/2.0	1.6	9.8±0.3	80
24	1+6	12	2.1±0.1	2.0/2.0	1.6	9.8±0.3	80
36	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
48	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
72	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
96	1+8	12	2.2±0.1	2.0/3.4	1.7	11.8±0.3	123
144	1+12	12	2.2±0.1	3.0/6.2	1.7	14.5±0.3	175

Fiber Parameters

No.	Items	Unit	Specification
1	Mode Field Diameter	1310nm 1550nm	9.2±0.4 10.4±0.8
2	Cladding Diameter	μm	125.0±1.0
3	Cladding Non-Circularity	%	≤1.0
4	Core-Cladding Concentricity Error	μm	≤0.5
5	Coating Diameter	μm	245±5
6	Coating Non-Circularity	%	≤6.0
7	Cladding-Coating Concentricity Error	μm	≤12.0
8	Cable Cutoff Wavelength	nm	λ _{cc} ≤1260
9	Attenuation(max.)	dB/km	1310nm ≤0.35 1550nm ≤0.21 1380nm ≤0.35 1625nm ≤0.24
10	Attenuation and wavelength	dB/km	1310nm 1285-1330nm ≤0.04 1550nm 1525-1575nm ≤0.03 1550nm 1480-1580nm ≤0.05
11	Dispersion	ps/(nm.km)	1288-1339nm ≥-3.5, ≤3.5 1271-1360nm ≥-5.3, ≤5.3 1480-1580nm ≤20 1550nm ≤18
12	Zero dispersion wavelength	Nm	1300-1324
13	Zero dispersion slope	ps/(nm ² ·km)	≤0.092
14	Typical value	ps/(nm ² ·km)	0.04
15	Largest individual fiber	Ps/ km	0.2
16	Link design values	Ps/ km	0.1
17	Two way average	1310nm-1550	≤0.01dB

Benefits of ADSS Cable

ADSS cables rely solely on their dielectric properties, eliminating the need for metal support structures and reducing installation costs.

Designed to withstand high electric fields, ADSS cables perform reliably near high-voltage power lines without interference from electromagnetic fields.


With superior weather resistance and tensile strength, ADSS cables excel in harsh environments like coastal areas and high altitudes, ensuring long-term performance.




Applications of ADSS Cables



Optical Fiber Hardware for ADSS cables

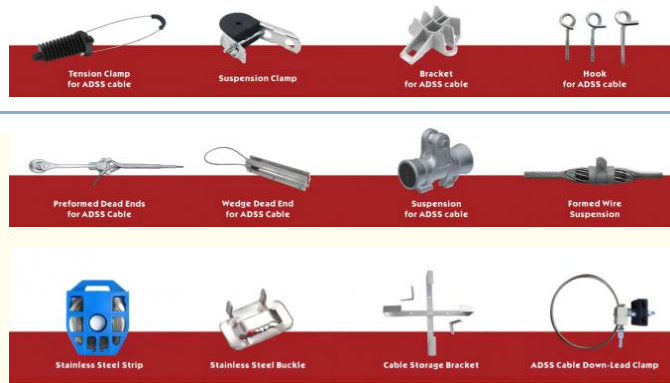

Production Supplier Profile

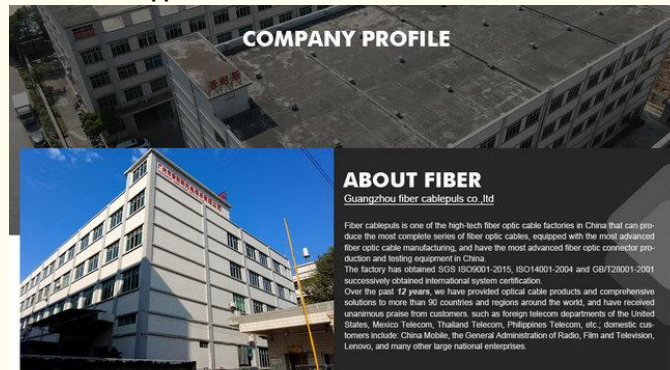

OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China



+8613687956390

cotton@fibercabl