



PUNAISGD

guangzhou fiber cablepuls co ltd  
fiberoptical-cables.com




## Wholesale Outdoor Aerial 2 4 6 8 12 24 48 72 96 Core ADSS Optical Fiber Optic Drop Communication Cable China Factory

Our Product Introduction

for more products please visit us on [fiberoptical-cables.com](http://fiberoptical-cables.com)

### Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: ADSS-12b1.3-SJ-100M
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool  $\Phi 1200 \times 750$ mm
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit, 70%Balance before shipping.
- Supply Ability: 100km



### Product Specification

- Type: ADSS Optical Cable-12b1.3-100m
- Fiber Type: Single Mode
- Fiber Count: 6/12/24/36/48/72/96/144
- Outer Sheath: Black PE
- Inner Sheath Material: PE/AT
- Installation Method: Aerial
- Strength Member Material: FRP/ARMID YARN
- Cable Diameter: 12.5mm
- Highlight: Outdoor Aerial ADSS Fiber Optic Cable,  
24 Core ADSS Fiber Optic Cable,  
96 Core ADSS Fiber Optic Cable



### Product Description

#### ADSS Fiber Optic Cable Wholesale Outdoor Aerial 2 4 6 8 12 24 48 72 96 Core ADSS Optical Fiber Optic Drop Communication Cable China Factory

##### Weather Resistance

UV Resistance: ADSS cables are resistant to ultraviolet (UV) radiation, making them durable even when exposed to direct sunlight over long periods.

Temperature Tolerance: These cables are designed to withstand a wide range of temperatures, ensuring reliability in various climates.

Water and Corrosion Resistance: The all-dielectric materials used in ADSS cables are also resistant to water and corrosion, making them suitable for use in harsh environmental conditions.

##### High-Fiber Count

Fiber Capacity: ADSS cables can carry a large number of optical fibers, allowing for high data transmission capacity over long distances.

Low Attenuation: The optical fibers within ADSS cables have low signal attenuation, ensuring high-quality signal transmission over long distances.

##### Ease of Installation

No Grounding Required: Since ADSS cables are all-dielectric, they do not require grounding, which simplifies the installation process and reduces costs.

Flexible Routing: The cables can be installed along existing power lines, reducing the need for new infrastructure.

Our Product Introduction

#### Long Lifespan

**Durability:** ADSS cables are designed for long-term use, with a typical lifespan of 20 to 30 years, depending on environmental conditions.

**Minimal Maintenance:** Once installed, these cables require minimal maintenance, further reducing operational costs.



#### ADSS Cable Place Order Information

Fiber count	Structure	Fibers per tube	Loose tube diameter (mm)	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mm)	Cable diameter/Height (mm)	Cable weight (kg/km)
4	1+6	4	1.9±0.1	2.0/2.0	1.6	9.5±0.2	80
6	1+6	6	2.0±0.1	2.0/2.0	1.6	9.8±0.3	80
8	1+6	4	1.9±0.1	2.0/2.0	1.6	9.8±0.3	80
12	1+6	6	2.1±0.1	2.0/2.0	1.6	9.8±0.3	80
24	1+6	12	2.1±0.1	2.0/2.0	1.6	9.8±0.3	80
36	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
48	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
72	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
96	1+8	12	2.2±0.1	2.0/3.4	1.7	11.8±0.3	123
144	1+12	12	2.2±0.1	3.0/6.2	1.7	14.5±0.3	175

#### Fiber Parameters

No.	Items	Unit	Specification
			G.652D
1	Mode Field Diameter	1310nm 1550nm	9.2±0.4 10.4±0.8
2	Cladding Diameter	μm	125.0±1.0
3	Cladding Non-Circularity	%	≤1.0
4	Core-Cladding Concentricity Error	μm	≤0.5
5	Coating Diameter	μm	245±5
6	Coating Non-Circularity	%	≤6.0
7	Cladding-Coating Concentricity Error	μm	≤12.0
8	Cable Cutoff Wavelength	nm	λ <sub>c</sub> ≤1260
9	Attenuation(max.)	1310nm 1550nm 1380nm 1625nm	dB/km dB/km dB/km dB/km
			≤0.35 ≤0.21 ≤0.35 ≤0.24
10	Attenuation and wavelength	1310nm 1285-1330nm 1550nm 1525-1575nm 1550nm 1480-1580nm	dB/km dB/km dB/km
			≤0.04 ≤0.03 ≤0.05
11	Dispersion	1288-1339nm 1271-1360nm 1480-1580nm 1550nm	ps/(nm.km) ps/(nm.km) ps/(nm.km) ps/(nm.km)
			≥-3.5, ≤3.5 ≥-5.3, ≤5.3 ≤20 ≤18
12	Zero dispersion wavelength	Nm	1300-1324
13	Zero dispersion slope	ps/(nm <sup>2</sup> ·km)	≤0.092
14	Typical value	ps/(nm <sup>2</sup> ·km)	0.04
15	Largest individual fiber	Ps/√ km	0.2
16	Link design values	Ps/√ km	0.1
17	Two way average	1310nm-1550	≤0.01dB

#### Benefits of ADSS Cable

ADSS cables rely solely on their dielectric properties, eliminating the need for metal support structures and reducing installation costs.

Designed to withstand high electric fields, ADSS cables perform reliably near high-voltage power lines without interference from electromagnetic fields.

With superior weather resistance and tensile strength, ADSS cables excel in harsh environments like coastal areas and high altitudes, ensuring long-term performance.




#### Applications of ADSS Cables



#### Optical Fiber Hardware for ADSS cables



#### Production Supplier Profile

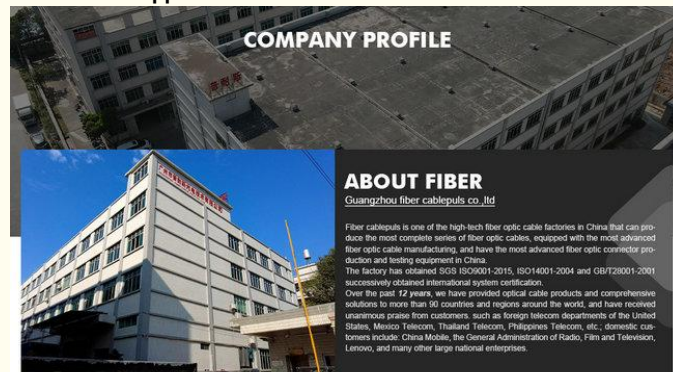

#### OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



#### How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: [cotton@fibercablepuls.com](mailto:cotton@fibercablepuls.com)
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan International Guangzhou city, Guangdong province, China



+8613687956390    cotton@fibercabl