

Fiber Optical Photoelectric Composite Cable 8 Cores Copper / Fiber **Composite Cable**

Our Product Introduction

đ

more products please visit us on fiberoptical-cables.com

Place of Origin:GUANGZHOU/CHINABrand Name:PUNAISGDCertification:ISO/CE/ROSHModel Number:GYXTW 8b1.3 +RVV1.5mmMinimum Order Quantity:2kmPrice:negotiatePackaging Details:Vooden Spool /drumDelivery Time:5-25daysPayment Terms:30%TT as deposit,70%Balance before shipping.Supply Ability:100km	Basic Information	
 Packaging Details: Wooden Spool /drum Delivery Time: 5-25days Payment Terms: 30%TT as deposit,70%Balance before shipping. 	Brand Name:Certification:Model Number:	PUNAISGD ISO/CE/ROSH GYXTW 8b1.3 +RVV1.5mm
	Packaging Details:Delivery Time:	Wooden Spool /drum 5-25days 30%TT as deposit,70%Balance before
	Supply Ability:	

Product Specification

•	ITEM I	NO.:	
	-		

Basic Information

- Cooper Wire:
- Jacket Color: Jacket Material:
- Armored Type:
- Strength Member:
- Highlight:
- 1.5 Mm² Red And Blue Black Or Customized PE/LSZH Steel Tape Steel Wires

GYTXW 8B1.3 +RVV1.5mm

Copper Fiber Composite Cable, 8 cores Composite Fiber Optic Cable




More Images



Product Description

Fiber Optical Photoelectric Composite Cable 8 cores Copper/Fiber Composite Cable

- (1) Small outer diameter, light weight and small space occupied;
- (2) Purchasing cost is low, construction cost is low and networking construction cost is low;
- (3) It has excellent bending performance and lateral pressure resistance, and is convenient for construction;
- (4) it provides a variety of transmission technologies at the same time, the same equipment has high adaptability, strong expansibility, wide product application;
- (5) Providing huge bandwidth access;
- (6) Cost savings, using optical fibers as home reservation, avoiding secondary wiring;
- (7) Solve the problem of equipment power consumption in networking construction (avoid repeating distribution of power supply lines).
- Photoelectric Composite Optical Cable are often used in overhead, pipeline and direct burial.

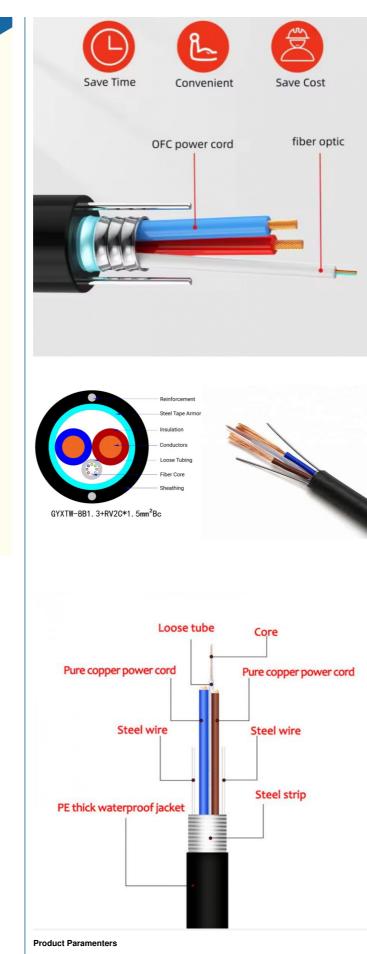

item						
cooper	F	RVV2*2.5MM	RVV-4*2.5mm RVV-6*2.5mm		RVV-8*2.5mm	
weight 347		382 502		628		
fiber count	struct	tur fibers per tube	loose tube diameter	CONDUCTOR CORSS SECTIONAL AREA	cable diameter	cable weight
2-18	1	2-18	1.8±0.1	1	9.4	92
20-24	1	20-24	1.9±0.1	1	10.4	106

2-18	1	2-18	1.8±0	.1	1.5		10.8	119		
20-24	1	20-24	1.8±0	.1	1.5		11.3	127		
ltem	Item				Unit	Specifi	Specification			
Fier Type	Fier Tyoe				G652D	G652D	G652D			
Mode file	Mode tiled Diameter			1310nm	μm	9.2±0.4	9.2±0.4			
would me				1550nm	μm	10.4±0	10.4±0.8			
Cladding	Cladding diameter				μm	125.0±	125.0±0.1			
Cladding	Cladding non-circularity				%	≤1.0	≤1.0			
Core/clad	Core/cladding concentricity error				μm	≤0.5	≤0.5			
Coating d	Coating diameter				μm	245±7	245±7			
Coating/c	Coating/cladding concentricity error			μm	≤12	≤12				
Cable cut-off wavelength				μm	≤1260	≤1260				
Attenuation Coefficient		1310nm	db/km	≤0.36	≤0.36					
		1550nm	db/km	≤0.22	≤0.22					
Proof stre	Proof stress level				kpsi	≥100	≥100			
Note: Other parameters meet standard ITU-T G.652										

Production Supplier Profile



How do I place an OEM or customized order?

- Send your purchase intention to our email: cotton@fibercablepuls.com
 Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
 Sign the contract or Proforma Invoice.
 After receiving your deposit, we will start to arrange the production.
 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China



+8613687956390 cotton@fibercabl