



PUNAISSD

guangzhou fiber cable co ltd  
fiberoptical-cables.com




## Aerial Figure 8 Fiber Optic Cable Self-support Fiber Optic Cable GYTC8S

Our Product Introduction

for more products please visit us on [fiberoptical-cables.com](http://fiberoptical-cables.com)

### Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISSD
- Certification: ISO/CE/ROSH
- Model Number: gyt8s-368B1.3
- Minimum Order Quantity: 2km
- Price: negotiable
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km



### Product Specification

- Item NO.: Gyt8s-36b1.3
- TYPE: FIG.8 Shape
- Loose Tube Material: PBT
- Strength Member: FRP& STEEL WIRES
- Application: OVERHEAD
- Fiber: G652D
- Highlight: GYTC8S Self-support Fiber Optic Cable,  
Self-support Fiber Optic Cable,  
GYTC8S Fiber Optic Cable




### Product Description

#### Aerial Figure 8 Fiber Optic Cable Figure 8 Self-support Fiber Optic Cable GYTC8S



GYTC8S optical cable Loose tube cable is a design that has high tensile strength and flexibility in a compact cable size. Our loose tube cable provides excellent optical transmission and physical performance;  
Excellent water proof layer;Excellent water proof layer;Steel tape armored, excellent anti-crush properties.

Our Product Introduction



Model: GYTC8Y  
 Messenger: 1.5mm Standed Galvanized Steel  
 Messenger for Flexibility  
 Fiber : Up to 24 cores, Gel filled  
 Jacket: Single HDPE Sheath  
 Armor: None  
 Tension Strength: 1000(Short term)  
 300(Long term)  
 Cable Diameter: 5.1\*10.2mm  
 Package: 4km/drum  
 Weight: 47KG/KM

Model: GYTC8S  
 Messenger: 1.5mm Standed Galvanized Steel  
 Messenger for Flexibility  
 Fiber : Up to 24 cores, Gel filled  
 Jacket: Single HDPE Sheath  
 Armor: Steel Tape  
 Tension Strength: 1000(Short term)  
 300(Long term)  
 Cable Diameter: 7.6\*14.5mm  
 Package: 4km/drum  
 Weight: 117KG/KM



Model: GYTC8Y  
 Messenger: 7\*1.0mm Standed Galvanized Steel  
 Messenger for Flexibility  
 Fiber : Up to 288 cores, Gel filled  
 Jacket: Single MDPE Sheath  
 Water Block: Water Blocking or Gel-filled  
 Armor: None  
 Tension Strength: 3000(Short term)  
 1000(Long term)  
 Cable Diameter: 9.1\*16.9mm  
 Package: 4km/drum  
 Weight: 142KG/KM


Model: GYTC8S  
 Messenger: 7\*1.0mm Standed Galvanized Steel  
 Messenger for Flexibility  
 Fiber : Up to 288 cores, Gel filled  
 Jacket: Single MDPE Sheath  
 Water Block: Water Blocking or Gel-filled  
 Armor: Steel Tape, Thickness 1mm  
 Tension Strength: 3000(Short term)  
 1000(Long term)  
 Cable Diameter: 9.5\*17mm  
 Package: 4km/drum  
 Weight: 156KG/KM



#### GYTC8S Cable Place Order Information




Fiber count	6 core 8 core 12 core
Fiber Type:	G652D/G657A1/G657A2
Crush Resistance Long term:	300 (N/100MM)
Crush Resistance Short term:	1000(N/100MM)
Overall Diameter	7.8x4mm
Sheath	PE
Strand Steel wire	7*0.8mm
Sample Status	In stock

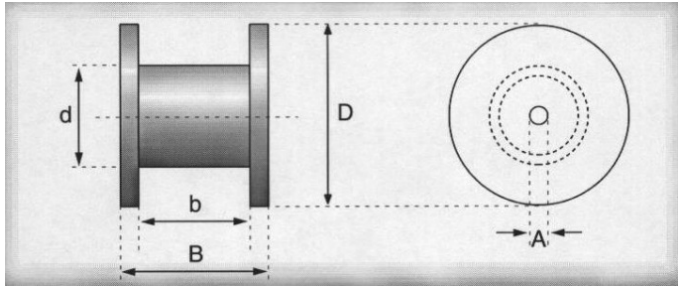

Production Supplier Profile



**COMPANY PROFILE**




**ABOUT FIBER**  
Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained ISO 90001:2015, ISO 14001:2004 and GB/T28001:2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 50 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc., domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



+8613687956390      cotton@fibercabl



## OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



### How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: [cotton@fibercablepuls.com](mailto:cotton@fibercablepuls.com)
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China