



## 24 Core GYTC8S Aerial Figure 8 Fiber Optic Cable G652D Outdoor

### Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD
- Certification: ISO/CE/ROSH
- Model Number: gyt8s-368B1.3
- Minimum Order Quantity: 2km
- Price: negotiable
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km



### Product Specification

- Item NO.: Gyt8s-12b1.3
- TYPE: FIG.8 Shape
- Loose Tube Material: PBT
- Strength Member: FRP& STEEL WIRES
- Application: OVERHEAD
- Fiber: G652D
- Highlight: **Aerial Figure 8 Fiber Optic Cable, G652D Fiber Optic Cable, Aerial Fiber Optic Cable 24 Core**



## Product Description

### Aerial Figure 8 Fiber Optic Cable 24 Core Outdoor G652D GYTC8S Self-Supporting Optical Cable

#### Product Specifications

Attribute	Value
Item NO.	gytc8s-12b1.3
TYPE	FIG.8 shape
Loose Tube Material	PBT
Strength member	FRP & STEEL WIRES
Application	OVERHEAD
Fiber	G652D

#### Product Description

Loose tube style, a figure-8 optical fiber cable with metallic central strength member of steel wire/strand and moisture barrier inner sheath incorporating steel messenger wire suitable for overhead installation as pole-to-pole or pole-to-premises. Tubes contain optical single-mode or multimode fibers color coded as per the color coding scheme.



Model: GYTC8Y

Messenger: 1.5mm Standard Galvanized Steel

Messenger for Flexibility

Fiber : Up to 24 cores, Gel filled

Jacket: Single HDPE Sheath

Aarmor: None

Tension Strength: 1000(Short term)

300(Long term)

Cable Diameter: 5.1\*10.2mm

Package: 4km/drum

Weight: 47KG/KM

Model: GYTC8S

Messenger: 1.5mm Standard Galvanized Steel

Messenger for Flexibility

Fiber : Up to 24 cores, Gel filled

Jacket: Single HDPE Sheath

Aarmor: Steel Tape

Tension Strength: 1000(Short term)


300(Long term)

Cable Diameter: 7.6\*14.5mm

Package: 4km/drum

Weight: 117KG/KM



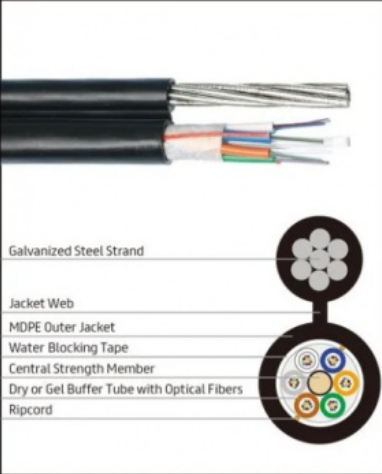

Model: GYTC8Y

Messenger: 7\*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber : Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Aarmor: None

Tension Strength: 3000(Short term)

1000(Long term)

Cable Diameter: 9.1\*16.9mm

Package: 4km/drum

Weight: 142KG/KM

Model: GYTC8S

Messenger: 7\*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber : Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Aarmor: Steel Tape, Thickness 1mm


Tension Strength: 3000(Short term)

1000(Long term)

Cable Diameter: 9.5\*17mm

Package: 4km/drum

Weight: 156KG/KM

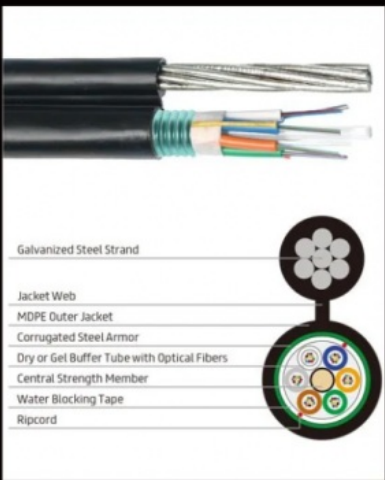

GYTC8S Cable Order Information



#### Technical Specifications

**Fiber count:** 6 core, 8 core, 12 core

**Fiber Type:** G652D/G657A1/G657A2

**Crush Resistance Long term:** 300 (N/100MM)


**Crush Resistance Short term:** 1000(N/100MM)

**Overall Diameter:** 7.8x4mm

**Sheath:** PE


**Strand Steel wire:** 7\*0.8mm

**Sample Status:** In stock

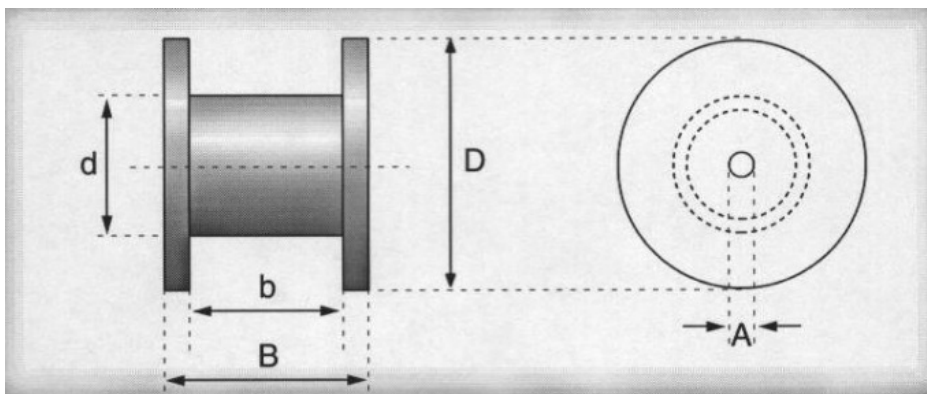


#### Manufacturer Profile



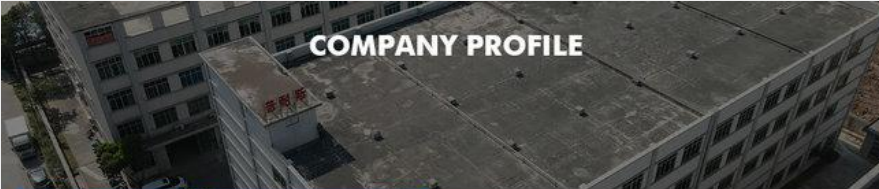

## COMPANY PROFILE



### ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001-2015, ISO14001-2004 and GB/T28001-2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 80 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc., domestic customers include China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



### OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



### Custom Order Process

Send your purchase intention to our email: [cotton@fibercablepuls.com](mailto:cotton@fibercablepuls.com)

Our sales team will contact you to confirm product specifications, packaging, printing, quantity, and other requirements

Sign the contract or Proforma Invoice

After receiving your deposit, we will begin production

2 weeks before production completion, we will notify you to arrange shipping



**guangzhou fiber cablepuls co ltd**



+8613687956390



[cotton@fibercablepuls.com](mailto:cotton@fibercablepuls.com)



[fiberoptical-cables.com](http://fiberoptical-cables.com)

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong  
province,China