Aerial Figure 8 Fiber Optic Cable 24 Core Outdoor G652D GYTC8S Self-**Supporting Optical Cable For Overhead Aerial** 

• Place of Origin: GUANGZHOU/CHINA

• Brand Name: PUNAISGD · Certification: ISO/CE/ROSH gytc8s-368B1.3 Model Number:

 Minimum Order Quantity: 2km • Price: negotiable

• Packaging Details: Wooden Spool /drum

Delivery Time: 5-25days

30%TT as deposit,70%Balance before • Payment Terms:

shipping. 100km



#### **Product Specification**

Supply Ability:

• Item NO.: Gytc8s-12b1.3 • TYPE: FIG.8 Shape • Loose Tube Material: PBT

• Strength Member: FRP& STEEL WIRES • Application: OVERHEAD

• Fiber: G652D

• Highlight: Aerial Figure 8 Fiber Optic Cable, G652D Fiber Optic Cable, Aerial Fiber Optic Cable 24 Core



# **Product Description**

Aerial Figure 8 Fiber Optic Cable 24 Core Outdoor G652D GYTC8S Self-Supporting Optical Cable For Overhead Aerial

Loose tube style, a figure-8 optical fiber cable with metallic central strength member of steel wire/strand and moisture barrier inner sheath incorporating steel messenger wire suitable for overhead installation as pole-to-pole or pole-topremises. Tubes contain optical single-mode or multimode fibers color coded as per the color coding scheme.



Messenger: 1.5mm Standed Galvanized Steel Messenger for Flexibility Fiber: Up to 24 cores, Gel filled

Jacket: Single HDPE Sheath Armor: None

Tension Strength: 1000(Short term)

300(Long term)

Cable Diameter: 5.1\*10.2mm

Package: 4km/drum Weight: 47KG/KM

Model: GYXTC8S

Messenger: 1.5mm Standed Galvanized Steel Messenger for Flexibility

Fiber: Up to 24 cores, Gel filled Jacket: Single HDPE Sheath


Armor: Steel Tape


Tension Strength: 1000(Short term)

300(Long term)

Cable Diameter: 7.6\*14.5mm

Package: 4km/drum Weight: 117KG/KM





Model: GYTC8Y

Messenger: 7\*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Armor: None

Tension Strength: 3000(Short term)

1000(Long term)

Cable Diameter: 9.1\*16.9mm

Package: 4km/drum Weight: 142KG/KM

Model: GYTC8S

Messenger: 7\*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Armor: Steel Tape, Thickness 1mm

Tension Strength: 3000(Short term)

1000(Long term)

Cable Diameter: 9.5\*17mm

Weight: 156KG/KM


Package: 4km/drum



**GYTC8S Cable Place Order Information** 



Fiber count	6 core 8 core 12 core
Fiber Type:	G652D/G657A1/G657A2
Crush Resistance Long term:	300 (N/100MM)
Crush Resistance Short term:	1000(N/100MM)
Overall Diameter	7.8x4mm
Sheath	PE
Strand Steel wire	7*0.8mm
Sample Status	In stock

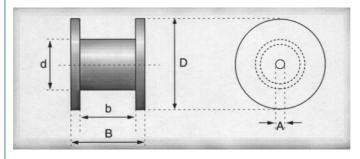

## **Production Supplier Profile**









### **OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM**





- How do I place an OEM or customized order?

  1) Send your purchase intention to our email: cotton@fibercablepuls.com

  2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.

  3) Sign the contract or Proforma Invoice.

  4) After receiving your deposit, we will start to arrange the production.

  5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China