



Adss Fiber Optic Cable 144 Core Aerial G652D Fiber Optical Cable

Our Product Introduction

for more products please visit us on fiberoptical-cables.com

Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: ADSS-12/24/48b1.3-SJ-100M
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool $\Phi 1200 \times 750$ mm
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit, 70%Balance before shipping.
- Supply Ability: 100km




Product Specification

- Type: ADSS Optical Cable-12/24/48b1.3-100m
- Fiber Type: Single Mode
- Fiber Count: 6/12/24/36/48/72/96/144
- Outer Sheath: Black PE
- Inner Sheath Material: PE/AT
- Installation Method: Aerial
- Strength Member Material: FRP/ARMID YARN
- Cable Diameter: 12.5mm
- Highlight: 144 Core ADSS Fiber Optic Cable, G652D ADSS Fiber Optic Cable, Aerial ADSS Fiber Optic Cable



More Images




Product Description

Adss Fiber Optic Cable 144 Core Aerial G652D Fiber Optical Cable

ADSS Fiber Optic Cable is safely and securely packaged for delivery. The packaging is designed so that the cable is protected from any damage in storage and during shipping. The packaging is also designed to make it easy to unload, unpack, and install the cable.

All ADSS Fiber Optic Cable is shipped using reliable and secure methods. The cables are shipped using specialized shippers designed to protect the cables from any damage during shipping. The cables are also shipped with tracking information so that customers can easily track the progress of their orders.

Our Product Introduction

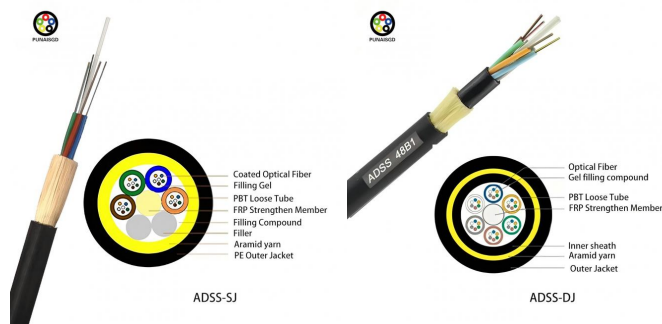

ADSS Cable Place Order Information

Fiber count	Structure	Fibers per tube	Loose tube diameter (mm)	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mm)	Cable diameter/Height (mm)	Cable weight (kg/km)
4	1+6	4	1.9±0.1	2.0/2.0	1.6	9.5±0.2	80
6	1+6	6	2.0±0.1	2.0/2.0	1.6	9.8±0.3	80
8	1+6	4	1.9±0.1	2.0/2.0	1.6	9.8±0.3	80
12	1+6	6	2.1±0.1	2.0/2.0	1.6	9.8±0.3	80
24	1+6	12	2.1±0.1	2.0/2.0	1.6	9.8±0.3	80
36	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
48	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
72	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
96	1+8	12	2.2±0.1	2.0/3.4	1.7	11.8±0.3	123
144	1+12	12	2.2±0.1	3.0/6.2	1.7	14.5±0.3	175

Fiber Parameters

Fiber Parameters			Unit	Specification
No.	Items		Unit	G.652D
1	Mode Field Diameter	1310nm 1550nm	μm	9.2±0.4 10.4±0.8
2	Cladding Diameter		μm	125.0±1.0
3	Cladding Non-Circularity		%	≤1.0
4	Core-Cladding Concentricity Error		μm	≤0.5
5	Coating Diameter		μm	245±5
6	Coating Non-Circularity		%	≤6.0
7	Cladding-Coating Concentricity Error		μm	≤12.0
8	Cable Cutoff Wavelength		nm	λ _c ≤1260
9	Attenuation(max.)	1310nm	dB/km	≤0.35
		1550nm	dB/km	≤0.21
		1380nm	dB/km	≤0.35
		1625nm	dB/km	≤0.24
10	Attenuation and wavelength	1310nm 1285-1330nm	dB/km	≤0.04
		1550nm 1525-1575nm	dB/km	≤0.03
		1550nm 1480-1580nm	dB/km	≤0.05
11	Dispersion	1288-1339nm	ps/(nm.km)	≥-3.5, ≤3.5
		1271-1360nm	ps/(nm.km)	≥-5.3, ≤5.3
		1480-1580nm	ps/(nm.km)	≤20
		1550nm	ps/(nm.km)	≤18
12	Zero dispersion wavelength		Nm	1300-1324
13	Zero dispersion slope		ps/(nm ² ·km)	≤0.092
14	Typical value		ps/(nm ² ·km)	0.04
15	Largest individual fiber		Ps/√ km	0.2
16	Link design values		Ps/√ km	0.1
17	Two way average		1310nm-1550	≤0.01dB

Benefits of ADSS Cable

ADSS cables rely solely on their dielectric properties, eliminating the need for metal support structures and reducing installation costs.

Designed to withstand high electric fields, ADSS cables perform reliably near high-voltage power lines without interference from electromagnetic fields.

With superior weather resistance and tensile strength, ADSS cables excel in harsh environments like coastal areas and high altitudes, ensuring long-term performance.




Applications of ADSS Cables



Optical Fiber Hardware for ADSS cables



Production Supplier Profile

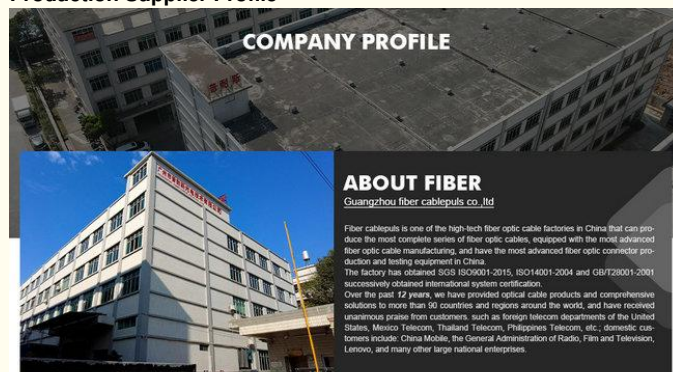

OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China



+8613687956390

cotton@fibercabl