



## Adss Fiber Optic Cable 300M Span All Dielectric Self-Supporting Double Jackets Optical Fiber Cable

Our Product Introduction

for more products please visit us on [fiberoptical-cables.com](http://fiberoptical-cables.com)

### Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: ADSS-12/24/48b1.3-SJ-100M
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool  $\Phi 1200 \times 750$ mm
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit, 70%Balance before shipping.
- Supply Ability: 100km




### Product Specification

- Type: ADSS Optical Cable-12/24/48b1.3-100m
- Fiber Type: Single Mode
- Fiber Count: 6/12/24/36/48/72/96/144
- Outer Sheath: Black PE
- Inner Sheath Material: PE/AT
- Installation Method: Aerial
- Strength Member Material: FRP/ARMID YARN
- Cable Diameter: 12.5mm
- Highlight: Double Jackets ADSS Fiber Optic Cable, 300M Span ADSS Fiber Optic Cable, Self Supporting ADSS Fiber Optic Cable



### More Images




### Product Description

#### Adss Fiber Optic Cable ADSS-300M Span All Dielectric Self-Supporting Double Jackets Optical Fiber Cable

##### APPLICATIONS

Adopted to outdoor aerial self-supporting installation;  
Long-distance communication, local trunk line, CATV & computer networks system, Telecom or outside plant campus backbone applications;  
Ethernet LAN Network, CCTV, Network Camera, PLC;  
Electric utility distribution power lines – Framed in supply or communications space;  
Fiber-to-the-X networks;  
Mechanically, rugged, cable design for: Aerial, underground duct.

Our Product Introduction

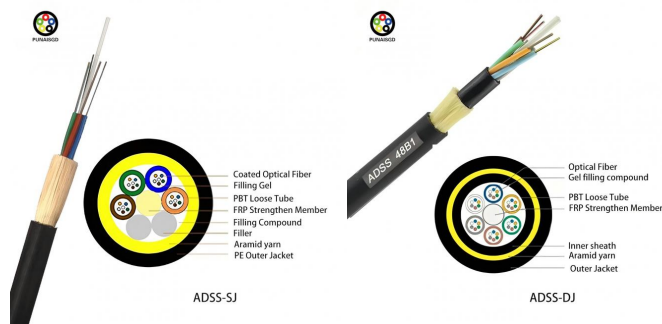

#### ADSS Cable Place Order Information

Fiber count	Structure	Fibers per tube	Loose tube diameter (mm)	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mm)	Cable diameter/Height (mm)	Cable weight (kg/km)
4	1+6	4	1.9±0.1	2.0/2.0	1.6	9.5±0.2	80
6	1+6	6	2.0±0.1	2.0/2.0	1.6	9.8±0.3	80
8	1+6	4	1.9±0.1	2.0/2.0	1.6	9.8±0.3	80
12	1+6	6	2.1±0.1	2.0/2.0	1.6	9.8±0.3	80
24	1+6	12	2.1±0.1	2.0/2.0	1.6	9.8±0.3	80
36	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
48	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
72	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
96	1+8	12	2.2±0.1	2.0/3.4	1.7	11.8±0.3	123
144	1+12	12	2.2±0.1	3.0/6.2	1.7	14.5±0.3	175

#### Fiber Parameters

No.	Items	Unit	Specification
1	Mode Field Diameter	1310nm 1550nm	9.2±0.4 10.4±0.8
2	Cladding Diameter	μm	125.0±1.0
3	Cladding Non-Circularity	%	≤1.0
4	Core-Cladding Concentricity Error	μm	≤0.5
5	Coating Diameter	μm	245±5
6	Coating Non-Circularity	%	≤6.0
7	Cladding-Coating Concentricity Error	μm	≤12.0
8	Cable Cutoff Wavelength	nm	λ <sub>c</sub> ≤1260
9	Attenuation(max.)	dB/km	1310nm ≤0.35 1550nm ≤0.21 1380nm ≤0.35 1625nm ≤0.24
10	Attenuation and wavelength	dB/km	1310nm 1285-1330nm ≤0.04 1550nm 1525-1575nm ≤0.03 1550nm 1480-1580nm ≤0.05
11	Dispersion	ps/(nm.km)	1288-1339nm ≥-3.5, ≤3.5 1271-1360nm ≥-5.3, ≤5.3 1480-1580nm ≤20 1550nm ≤18
12	Zero dispersion wavelength	Nm	1300-1324
13	Zero dispersion slope	ps/(nm <sup>2</sup> ·km)	≤0.092
14	Typical value	ps/(nm <sup>2</sup> ·km)	0.04
15	Largest individual fiber	Ps/√ km	0.2
16	Link design values	Ps/√ km	0.1
17	Two way average	1310nm-1550	≤0.01dB

#### Benefits of ADSS Cable

ADSS cables rely solely on their dielectric properties, eliminating the need for metal support structures and reducing installation costs.

Designed to withstand high electric fields, ADSS cables perform reliably near high-voltage power lines without interference from electromagnetic fields.


With superior weather resistance and tensile strength, ADSS cables excel in harsh environments like coastal areas and high altitudes, ensuring long-term performance.




#### Applications of ADSS Cables



## Optical Fiber Hardware for ADSS cables

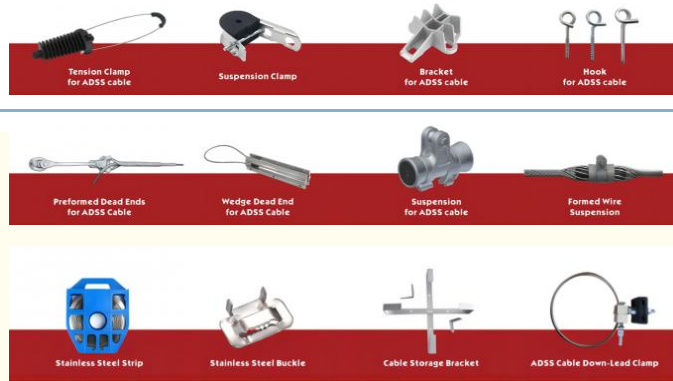

## Production Supplier Profile

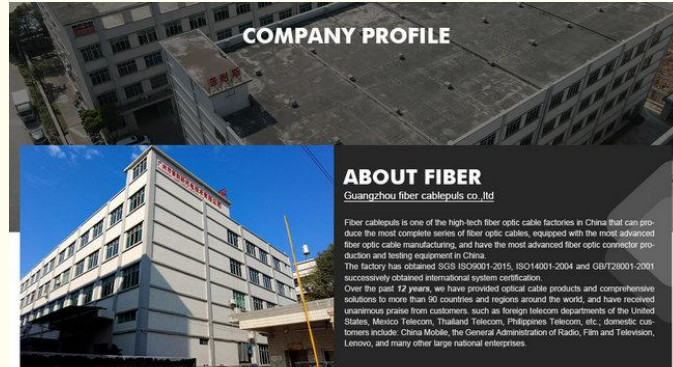

## OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



### How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: [cotton@fibercablepuls.com](mailto:cotton@fibercablepuls.com)
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China



+8613687956390

cotton@fibercabl