



GYTC8S Aerial Figure 8 Fiber Optic Cable G652D PE Sheath

Basic Information

Place of Origin:
 GUANGZHOU/CHINA

Brand Name: PUNAISGD
Certification: ISO/CE/ROSH
Model Number: gytc8s-48B1.3

• Minimum Order Quantity: 2km

• Price: negotiable

Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25days

Payment Terms: 30%TT as deposit,70%Balance before

shipping.

• Supply Ability: 100km



Product Specification

Item NO.: Gytc8s-48b1.3TYPE: FIG.8 Shape

• Loose Tube Material: PBT

• Strength Member: FRP& STEEL WIRES

Application: OVERHEADFiber: G652D

• Highlight: Self Support Fiber Optic Cable GYTC8S,

Figure 8 Overhead Fiber Optic Cable, PE Sheath Aerial Fiber Optic Cable



More Images



Overhead Self-Support Fiber Optic Cable GYTC8S Figure 8 Aerial Fiber Optic Cable PE Sheath

Product Specifications

Attribute	Value
Item NO.	gytc8s-48b1.3
TYPE	FIG.8 shape
Loose Tube Material	PBT
Strength member	FRP & STEEL WIRES
Application	OVERHEAD
Fiber	G652D

Product Description

Aerial Figure 8 Fiber Optic Cable offers excellent tension resistance and self-supporting capabilities. The cable features a metallic central strength member forming a compact circular core with integrated water-blocking materials. After applying PSP around the cable core, this section along with stranded wires is completed with a PE sheath to create the distinctive figure-8 structure.

Top Rated Figure 8 Fiber Optic Cable Manufacturer

6 to 288 cores available for various applications

Trusted by major brands and Fiber Internet Service Providers

Free samples available for testing

Short lead time for bulk orders

12 Fiber Cable Experts available for customization

25 Years Warranty for Oriental Fiber Cables



Model: GYXTC8S

Messenger: 1.5mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 24 cores, Gel filled Jacket: Single HDPE Sheath


Armor: Steel Tape


Tension Strength: 1000(Short term)

300(Long term)

Cable Diameter: 7.6*14.5mm

Package: 4km/drum Weight: 117KG/KM

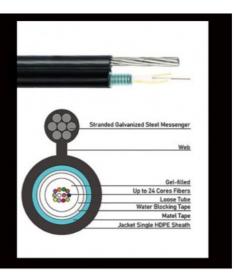

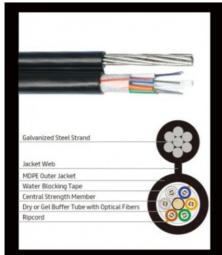

Model: GYTC8Y

Messenger: 7*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Armor: None

Tension Strength: 3000(Short term)

1000(Long term)

Cable Diameter: 9.1*16.9mm

Package: 4km/drum Weight: 142KG/KM

Model: GYTC8S

Messenger: 7*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Armor: Steel Tape, Thickness 1mm Tension Strength: 3000(Short term) 1000(Long term)

Cable Diameter: 9.5*17mm


Package: 4km/drum Weight: 156KG/KM




GYTC8S Cable Order Information



Fiber count	6 core, 8 core, 12 core
Fiber Type	G652D/G657A1/G657A2
Crush Resistance (Long term)	300 (N/100MM)
Crush Resistance (Short term)	1000(N/100MM)
Overall Diameter	7.8x4mm
Sheath	PE
Strand Steel wire	7*0.8mm
Sample Status	In stock

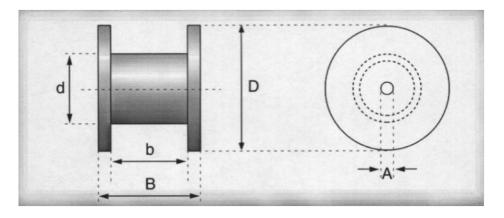

Production Supplier Profile

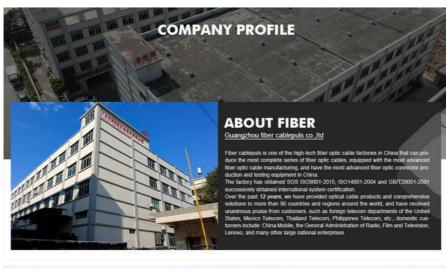



How to Place an OEM or Customized Order

Send your purchase intention to our email: cotton@fibercablepuls.com

Our sales team will contact you to confirm product specifications, packaging, printing, quantity, and other requirements

Sign the contract or Proforma Invoice

After receiving your deposit, we will begin production

2 weeks before production completion, we will notify you to arrange shipping



