₫

Our Product Introduction

Overhead Self-Support Fiber Optic Cable GYTC8S Figure 8 Aerial Fiber Optic Cable PE Sheath

Basic Information

• Place of Origin: GUANGZHOU/CHINA

• Brand Name: PUNAISGD Certification: ISO/CE/ROSH Model Number: gytc8s-48B1.3 Minimum Order Quantity: 2km • Price: negotiable

Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25days

30%TT as deposit,70%Balance before • Payment Terms:

shipping. 100km



Product Specification

Supply Ability:

• Item NO.: Gytc8s-48b1.3 • TYPE: FIG.8 Shape

• Loose Tube Material: PBT

Strength Member: FRP& STEEL WIRES • Application: **OVERHEAD**

• Fiber: G652D

• Highlight: Self Support Fiber Optic Cable GYTC8S,

Figure 8 Overhead Fiber Optic Cable, PE Sheath Aerial Fiber Optic Cable



More Images



Product Description

Aerial Figure 8 Fiber Optic Cable Figure 8 Self-support Fiber Optic Cable GYTC8S

Figure 8 aerial fiber optic cable has great performance of tension resistance and self-supporting. metallic central strength member into a compact and circular cable core, and the water-blocking materials are distributed into interstices of it. After a PSP is applied around the cable core, this part of cable accompanied with the stranded wires as the supporting part are

completed with a PE sheath to be a figure -8 structure. Top Rated Figure 8 Fiber Optic Cable Manufacturer 6 to 288 cores Figure 8 Fiber Optic Cable for options Trusted by big brands and Fiber Internet Service Providers Free Sample Available for Testing

Short Lead Time for Bulk Order

12 Fiber Cable Experts for your Customization 25 Years Warranty for Oriental Fiber Cables



Messenger: 1.5mm Standed Galvanized Steel Messenger for Flexibility Fiber: Up to 24 cores, Gel filled

Jacket: Single HDPE Sheath Armor: None

Tension Strength: 1000(Short term)

300(Long term)

Cable Diameter: 5.1*10.2mm

Package: 4km/drum Weight: 47KG/KM

Model: GYXTC8S

Messenger: 1.5mm Standed Galvanized Steel Messenger for Flexibility

Fiber: Up to 24 cores, Gel filled Jacket: Single HDPE Sheath


Armor: Steel Tape


Tension Strength: 1000(Short term)

300(Long term)

Cable Diameter: 7.6*14.5mm

Package: 4km/drum Weight: 117KG/KM





Model: GYTC8Y

Messenger: 7*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Armor: None

Tension Strength: 3000(Short term)

1000(Long term)

Cable Diameter: 9.1*16.9mm

Package: 4km/drum Weight: 142KG/KM

Model: GYTC8S

Messenger: 7*1.0mm Standed Galvanized Steel

Messenger for Flexibility

Fiber: Up to 288 cores, Gel filled

Jacket: Single MDPE Sheath

Water Block: Water Blocking or Gel-filled

Armor: Steel Tape, Thickness 1mm


Tension Strength: 3000(Short term)

1000(Long term)

Cable Diameter: 9.5*17mm

Weight: 156KG/KM


Package: 4km/drum



GYTC8S Cable Place Order Information



Fiber count	6 core 8 core 12 core
Fiber Type:	G652D/G657A1/G657A2
Crush Resistance Long term:	300 (N/100MM)
Crush Resistance Short term:	1000(N/100MM)
Overall Diameter	7.8x4mm
Sheath	PE
Strand Steel wire	7*0.8mm
Sample Status	In stock

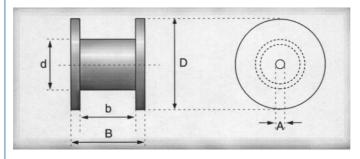

Production Supplier Profile









OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM





- How do I place an OEM or customized order?

 1) Send your purchase intention to our email: cotton@fibercablepuls.com

 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.

 3) Sign the contract or Proforma Invoice.

 4) After receiving your deposit, we will start to arrange the production.

 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China