

# Aerial Figure 8 Self-Supporting Armored Fiber Optic Cable GYTC8S With FRP **Steel Wires**

# **Our Product Introduction**

**Basic Information** 

<ul> <li>Place of Origin:</li> </ul>	GUANGZHOU/CHINA
<ul> <li>Brand Name:</li> </ul>	PUNAISGD
<ul> <li>Certification:</li> </ul>	ISO/CE/ROSH
<ul> <li>Model Number:</li> </ul>	gytc8s-48B1.3
Minimum Order Quantity:	2km
• Price:	negotiable
<ul> <li>Packaging Details:</li> </ul>	Wooden Spool /drum
<ul> <li>Delivery Time:</li> </ul>	5-25days
Payment Terms:	30%TT as deposit,70%Balance before shipping.
<ul> <li>Supply Ability:</li> </ul>	100km
Product Specification	
• Item NO.:	Gytc8s-48b1.3

FIG.8 Shape


OVERHEAD

G652D

FRP& STEEL WIRES

GYTC8S Armored Fiber Optic Cable Self Supporting Armored Fiber Optic Cable, Armored Fiber Optic Cable Figure 8

PBT



# More Images

• TYPE:

• Loose Tube Material:

Strength Member:

Application:

• Highlight:

• Fiber:



### **Product Description**

Aerial Figure 8 Self-Supporting Armored Fiber Optic Cable Fibra Optica GYTC8S


GYTC8S/A Self-support Aerial FIG 8 Armored Outdoor Optical Fiber Cable

Fiber Counts: 2 cores -288 cores Structure: Figure 8 design, loose tube CSM(Central Strength Member): Steel wire (or FRP) Span customized: 80/100/120/150/200m etc. Light-armored: Corrugated Steel Tape (aluminium tape optional) SJSA: Single Jacket Single Armor Messenger: stranded steel wires 7\*1.0mm Drum Length: 2km,3km,4km as request Application: Self-supporting Aerial Installation

The 2-288 fibers are positioned in PBT loose tube filled with gel. Tubes (and fillers) are stranded around the central strength member(Steel or FRP) to form the cable core. The cable core is filled with water blocking compound and armored with corrugated steel tape(CST). Stranded steel wires support as the messenger. Finally, a figure-8 PE outer jacket is extruded.

đ

more products please visit us on fiberoptical-cables.com

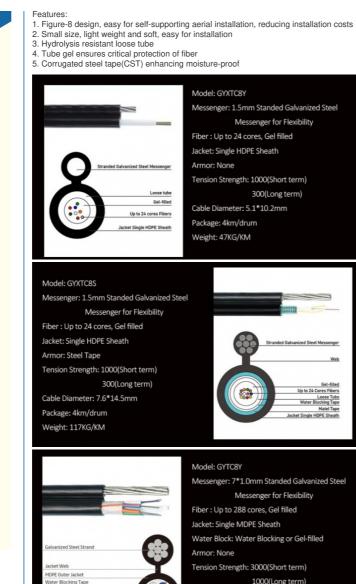

Messenger: 7\*1.0mm Standed Galvanized Steel Messenger for Flexibility Fiber : Up to 288 cores, Gel filled Jacket: Single MDPE Sheath Water Block: Water Blocking or Gel-filled Tension Strength: 3000(Short term) 1000(Long term) Cable Diameter: 9.1\*16.9mm Package: 4km/drum Weight: 142KG/KM

300(Long term)

nized Steel M

Up to 24 Co

Loose Tube Water Blocking Tape Matel Tape






GYTC8S Cable Place Order Information



Crush Resistance Long term:         300 (N/100MM)           Crush Resistance Short term:         1000(N/100MM)           Overall Diameter         7.8x4mm           Sheath         PE	ber Type:	G652D/G657A1/G657A2
Overall Diameter 7.8x4mm	rush Resistance Long term:	300 (N/100MM)
	rush Resistance Short term:	1000(N/100MM)
Sheath PE	verall Diameter	7.8x4mm
	heath	PE
Strand Steel wire 7*0.8mm	trand Steel wire	7*0.8mm
Sample Status In stock	ample Status	In stock

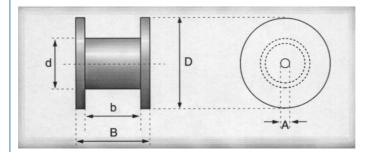

# **Production Supplier Profile**





+8613687956390 cotton@fibercabl



### OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM





- How do I place an OEM or customized order?
  1) Send your purchase intention to our email: cotton@fibercablepuls.com
  2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
  3) Sign the contract or Proforma Invoice.
  4) After receiving your deposit, we will start to arrange the production.
  5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China