



Aerial Figure 8 Single Mode Outdoor Fiber Optic Cable Gyftc8s

Our Product Introduction

for more products please visit us on fiberoptical-cables.com

Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD
- Certification: ISO/CE/ROSH
- Model Number: gytc8s-48B1.3
- Minimum Order Quantity: 2km
- Price: negotiable
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km



Product Specification

- Item NO.: Gytc8s-48b1.3
- TYPE: FIG.8 Shape
- Loose Tube Material: PBT
- Strength Member: FRP& STEEL WIRES
- Application: OVERHEAD
- Fiber: G652D
- Highlight: Outdoor Fiber Optic Cable Gyftc8s, Outdoor Fiber Optic Cable Single Mode, FIG.8 Aerial Fiber Optic Cable



More Images



Product Description

Aerial Figure 8 Figure 8 Figure 8 Single Mode Fiber Fibra Optica Outdoor Fiber Optic Cable Gyftc8s

The fibers are positioned in PBT loose tubes filled with tube gel. The tubes (and fillers) are stranded around a FRP central strength member(CSM) to form the cable core.The core is filled with water-blocking compound and armored with corrugated steel tape(CST). Stranded steel wires are applied as the messenger. Finally, a figure-8 PE outer jacket is extruded.

Features:


- Figure-8 design, easy for self-supporting aerial installation, reducing installation costs
- Small size, light weight and soft, easy for installation
- Hydrolysis resistant loose tube
- Tube gel ensures critical protection of fiber
- Corrugated steel tape(CST) enhancing moisture-proof and anti-rodent

Application: Self-supporting Aerial Installation

Fiber Counts	2-30	32-36	38-60	62-72	74-96	98-120	122-144	146-216	218-288
Max.fiber counts per tube	6	6	12	12	12	12	12	12	12
Units(Tubes or Fillers)	5	6	5	6	8	10	12	18	24
Cable Diameter(mm)	9.2*16.2	9.6*16.6	9.7*16.7	10.2*17.2	11.5*18.5	12.8*19.8	14.0*21.0	14.3*21.3	16.2*23.2
Weight(Kg/km)	145	160	160	177	203	230	260	263	312



Our Product Introduction

Fiber Type	G652D G655 G657 50/125 62.5/125
Steel wire(mm)	1.0*7
Tensile Strength(N)	Long/Short Term:1000/3500
Crush Resistance(N/100mm)	Long/Short Term:1000/2200
Bending Radius(mm)	Static/Dynamic:10D/20D
Temperature(°C)	Storage /Operation:-40°C~70°C



Model: GYTC8Y
 Messenger: 1.5mm Standed Galvanized Steel
 Messenger for Flexibility
 Fiber : Up to 24 cores, Gel filled
 Jacket: Single HDPE Sheath
 Armor: None
 Tension Strength: 1000(Short term)
 300(Long term)
 Cable Diameter: 5.1*10.2mm
 Package: 4km/drum
 Weight: 47KG/KM

Model: GYTC8S
 Messenger: 1.5mm Standed Galvanized Steel
 Messenger for Flexibility
 Fiber : Up to 24 cores, Gel filled
 Jacket: Single HDPE Sheath
 Armor: Steel Tape
 Tension Strength: 1000(Short term)
 300(Long term)
 Cable Diameter: 7.6*14.5mm
 Package: 4km/drum
 Weight: 117KG/KM



Model: GYTC8Y
 Messenger: 7*1.0mm Standed Galvanized Steel
 Messenger for Flexibility
 Fiber : Up to 288 cores, Gel filled
 Jacket: Single MDPE Sheath
 Water Block: Water Blocking or Gel-filled
 Armor: None
 Tension Strength: 3000(Short term)
 1000(Long term)
 Cable Diameter: 9.1*16.9mm
 Package: 4km/drum
 Weight: 142KG/KM


Model: GYTC8S
 Messenger: 7*1.0mm Standed Galvanized Steel
 Messenger for Flexibility
 Fiber : Up to 288 cores, Gel filled
 Jacket: Single MDPE Sheath
 Water Block: Water Blocking or Gel-filled
 Armor: Steel Tape, Thickness 1mm
 Tension Strength: 3000(Short term)
 1000(Long term)
 Cable Diameter: 9.5*17mm
 Package: 4km/drum
 Weight: 156KG/KM




GYTC8S Cable Place Order Information




Fiber count	6 core 8 core 12 core
Fiber Type:	G652D/G657A1/G657A2
Crush Resistance Long term:	300 (N/100MM)
Crush Resistance Short term:	1000(N/100MM)
Overall Diameter	7.8x4mm
Sheath	PE
Strand Steel wire	7*0.8mm
Sample Status	In stock

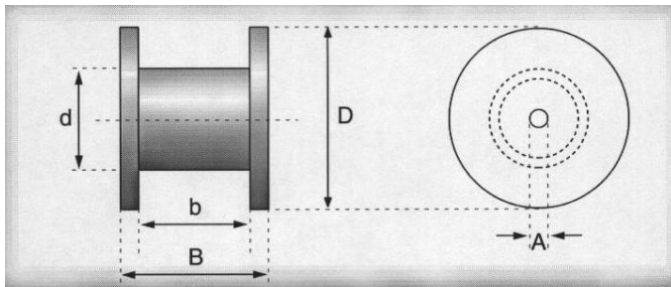

Production Supplier Profile

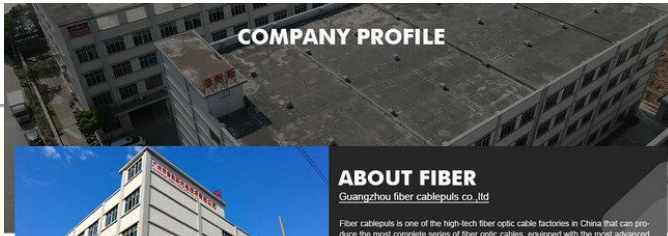

COMPANY PROFILE



ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001:2015, ISO14001:2004 and GB/T28001:2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 50 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc., domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



+8613687956390

cotton@fibercabl



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



▲ Color Coating

▲ Color Fiber Testing

▲ Fiber to Loose Tube

▲ Stranded Loose Tube

▲ PE Sheath Coated

▲ Finished Cable Testing



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China