




Outdoor Fiber Optic Cable FTTx Uni Tube Light Armored GYXTW Fiber Cable With Rodent Protection

Our Product Introduction

for more products please visit us on fiberoptical-cables.com


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAI SGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GYXTW-6B1.3
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km




Product Specification

- Model No: GYXTW-12B1.3
- Use: Aerial
- Loose Tube Material: PBT With Jelly
- Cable Diameter: 8mm
- Samples: Free
- Fiber Grade: G652D
- Waterblocking Material: Water Blocking Tape Or Filling Compound
- Steel Wire: 1.0*2mm
- Cable Color: Black
- Highlight: Rodent Protection Fiber Cable, GYXTW Fiber Cable, Outdoor Fiber Optic Cable FTTx



More Images



Product Description

Outdoor Fiber Optic Cable FTTx Uni Tube Light Armored GYXTW Fiber Cable With Rodent Protection

In the GYXTW cable, single-mode/multimode fibers are positioned in the loose tube, which is made of high-modulus plastic materials and filled with filling compounds. PSP is longitudinally applied around the loose tube, and water-blocking materials are distributed into interstices between them to guarantee compactness and longitudinal water-blocking performance. Two parallel steel wires are placed at both sides of the cable core while the PE sheath is extruded over it.

GYXTW Fiber Optic Cable Technical Specifications

Parameter	Specification
Cable Type	GYXTW
Fiber Type	G652D Single-Mode Fiber
Number of Cores	12 Cores
Outer Diameter	8 mm
Cable Structure	Central strength member, loose tube, steel wire armoring, PE sheath
Fiber Core Parameters	
- Mode Field Diameter	8.6 - 9.5 μm @ 1310 nm
- Cladding Diameter	125.0 $\pm$ 0.7 μm
- Core/Cladding Concentricity	$\leq$ 0.5 μm

Our Product Introduction

Parameter	Specification
- Coating Diameter	245 ± 5 μm
- Attenuation	≤ 0.36 dB/km @ 1310 nm, ≤ 0.22 dB/km @ 1550 nm
- Dispersion	≤ 3.5 ps/(nm·km) @ 1288-1339 nm, ≤ 18 ps/(nm·km) @ 1550 nm
- Zero Dispersion Wavelength	1300 - 1324 nm
- Cable Cutoff Wavelength	≤ 1260 nm
- Bend Radius	20x cable diameter (static), 10x cable diameter (dynamic)
Mechanical Properties	
- Tensile Strength	600 N (short-term), 1500 N (long-term)
- Crush Resistance	3000 N/100 mm
- Impact Resistance	1 N·m (1 kg, 1 m drop)
Environmental Properties	
- Operating Temperature	-40°C to +70°C
- Storage Temperature	-50°C to +80°C
- Water Resistance	Passes IEC 60794-1-F5B water penetration test
Standards Compliance	ISO 9001, RoHS, IEC 60793, IEC 60794

Key Features

G652D Fiber: Ideal for long-distance, high-bandwidth applications with low attenuation and excellent dispersion characteristics.

Steel Wire Armoring: Provides superior mechanical protection and tensile strength.

PE Sheath: Ensures durability and resistance to environmental factors such as UV, moisture, and abrasion.



APPLICATION



Smart TV



Computer



Notebook



Router




Printer



CCTV




Switch



Switchboard


GYXTW Cable Place Order Information



Cable data

Fiber count	Structure	Fibers per tube	Loose tube diameter (mm)	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mm)	Cable diameter/Height (mm)	Cable weight (kg/km)
2	1	2	1.7±0.1	1.0/1.0	1.6	8.0±0.2	57
4	1	4	1.85±0.1	1.0/1.0	1.6	8.0±0.2	58
6	1	6	1.9±0.1	1.0/1.0	1.6	8.0±0.2	58
8	1	8	2.0±0.1	1.0/1.0	1.6	8.0±0.2	60
12	1	12	2.2±0.1	1.0/1.0	1.6	8.0±0.2	60

Fiber Parameters				
No.	Items		Unit	Specification
				G.652D
1	Mode Field Diameter	1310nm	μm	9.2±0.4
		1550nm	μm	10.4±0.8
2	Cladding Diameter		μm	125.0±1.0
3	Cladding Non-Circularity		%	≤1.0
4	Core-Cladding Concentricity Error		μm	≤0.5
5	Coating Diameter		μm	245±5
6	Coating Non-Circularity		%	≤6.0
7	Cladding-Coating Concentricity Error		μm	≤12.0
8	Cable Cutoff Wavelength		nm	λcc≤1260
9	Attenuation(max.)	1310nm	dB/km	≤0.35
		1550nm	dB/km	≤0.21
		1380nm	dB/km	≤0.35
		1625nm	dB/km	≤0.24
10	Attenuation and wavelength	1310nm 1285-1330nm	dB/km	≤0.04
		1550nm 1525-1575nm	dB/km	≤0.03
		1550nm 1480-1580nm	dB/km	≤0.05
11	Dispersion	1288-1339nm	ps/(nm.km)	≥-3.5, ≤3.5
		1271-1360nm	ps/(nm.km)	≥-5.3, ≤5.3
		1480-1580nm	ps/(nm.km)	≤20
		1550nm	ps/(nm.km)	≤18
12	Zero dispersion wavelength		Nm	1300-1324
13	Zero dispersion slope		ps/(nm2.km)	≤0.092
14	Typical value		ps/(nm2.km)	0.04
15	Largest individual fiber		Ps/√ km	0.2
16	Link design values		Ps/√ km	0.1
17	Two way average	1310nm-1550		≤0.01dB

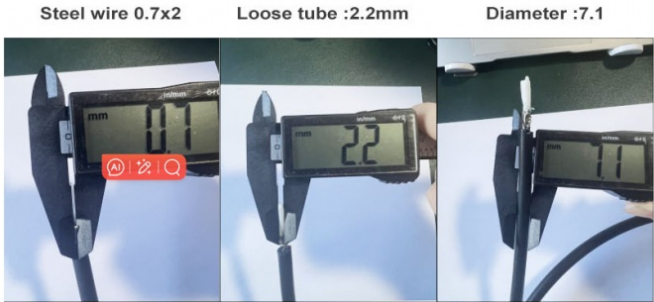


Cable Marking&Fibers Colors
COMPANY Fiber cable name N*cores G.652D 2024 XXXXm

*The marking is printed every 1 meter;
***G.652D* means ITU-T Rec. Low Water Peak (LWP) G.652 single mode optical fiber..

Also can according to client cable marking.



Production Supplier Profile

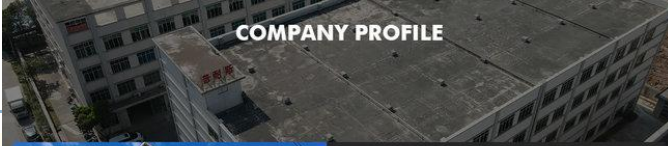

COMPANY PROFILE



ABOUT FIBER
Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001:2015, ISO14001:2004 and GB/T28001:2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc., domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.



+8613687956390

cotton@fibercabl

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong
province,China