



Aerial Figure 8 Fiber Optic Cable Self Supporting GYTC8A Figure 8 Fiber Optic Cable 12/24/96core Aerial Fibre Cable

Our Product Introduction

for more products please visit us on fiberoptical-cables.com


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GYTC8S-8B1.3
- Minimum Order Quantity: 2km
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km



Product Specification

- Item NO.: GYTC8S-8B1.3
- TYPE: Fig.8 Shape
- Application: Outdoor AREIAL
- Jacket Material: PE/LSZH
- Fiber Type: G.652D
- Strength Member: Messenger Wires
- Outer Diameter: 8.5*12.5mm
- Warranty Period: 25 Years
- Highlight: Aerial Figure 8 Fiber Optic Cable,
GYTC8A Figure 8 Fiber Optic Cable



Product Description

Aerial Figure 8 Fiber Optic Cable Self Supporting GYTC8A Figure 8 Fiber Optic Cable 12/24/96core Aerial Fibre Cable

Features:

- .Excellent mechanical and environmental performance
- .Small cable diameter, self-supporting, easily to installLow dispersion
- .Corrugated steel tape armored and PE outer sheath providing crush resistance and gun shot resistance features
- .Cross section shows figure 8
- .Stranded wires as self supporting member providing excellent strain performance and convenient installation
- Steel-wire strength member provides good tensility,ensures tensile strength
- .Water blocking system to improve the water proof ability

Application:

1. Suitable for Self supporting Aerial
2. Long distance and local area network communication
3. Inter-building voice or data communication backbones.


Our Product Introduction



Technical data:

Numbers of fibers: 6-8,10-12,14-24,30-72
 Design(Strength Member+Tube&Filler): Central Steel wires+Stranded Loose Multi-tube Cable
 Fiber type: Single mode G.652.D
 Strength Member: PSP
 Loose Tube: PBT
 Filler Rope: No
 Water Blocking Layer(Material): Water Blocking tape
 Additional Strength Member(Material):PSP
 Outer Sheath: PE
 Cable Diameter(± 0.2 mm): 6.8*9.2*18mm;7*9.5*18.5mm
 Cable Weight(± 10.0 kg/km): 210-250kg
 Attenuation coefficient : @ 1310nm ≤ 0.35 dB ; @ 1550nm ≤ 0.2 dB
 Min. bending radius Without Tension: 10.0×Cable- ϕ
 Min. bending radius Under Maximum Tension: 20.0×Cable- ϕ

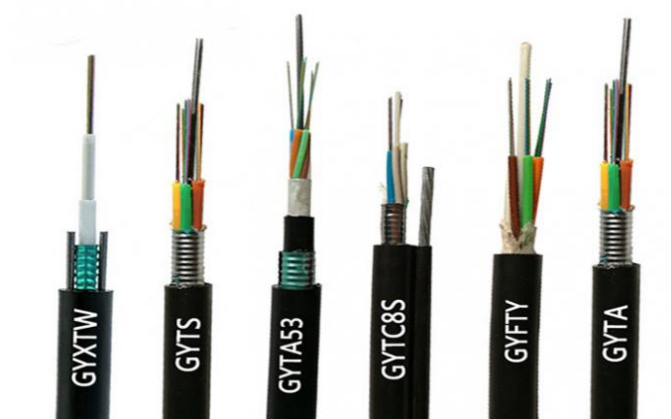


GYTC8S Cable Place Order Information



CABLE DATA

CABLE DATA		
No. of cable		12 24
Fiber Model		G652D
Design (StrengthMember+Tube&Filler)		1+5
Central Strength Member	Material	FRP
	Diameter(±0.05)mm	1.5
Loose Tube	Material	PBT
	Diameter(±0.06)mm	1.7
	Thickness(±0.03)mm	0.32
	The Max.Core NO./Tube	6
Filler Rope	Material	PP
	Diameter(±0.06)mm	1.7
	NO.	3 1
Water Blocking Layer(Material)		Flooding Compound
Outer Sheath①	Material	PE
	Thickness(±0.1)mm	1.2
Outer Sheath②	Material	PE
	Thickness(±0.1)mm	1.8

Web	Material	PE
	Size(±0.1)mm	2.0*2.0
Messenger Wire	Material	Steel stranded
	Size(±0.1)mm	2.7mm(0.9mm×7)
Cable Diameter(±0.5)mm(W×H)		8.5×15.2
Cable Weight(±10)kg/km		100
Min. bending radius	Without Tension	10.0×Cable-φ
	Under Maximum Tension	20.0×Cable-φ
Temperature range (°C)	Installation	-20~+60
	Transport&Storage	-40~+70
	Operation	-40~+70

	<p>Fiber Core</p> <ol style="list-style-type: none"> 1. Corning/YOFC/FiberHome/Fujikura Fiber Core Options 2. Single Mode/Multi Mode Options 3. 12 different Colors Option, can do as your request
<p>Armored PSP/APL Armored, Plastic coated steel strip Increase the mechanical strength of the GYTC8S cable</p> <p>Improve corrosion resistance</p> <p>7*1.0mm Steel for Overhead, Aerial</p>	
	<p>PE Outer Jacket Material High Quality New PE Material</p> <ol style="list-style-type: none"> 1. Smooth appearance 2. Flame retardant 3. Corrosion protection 4. Long service life

Production Supplier Profile



COMPANY PROFILE



ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China. The factory has obtained ISO9001:2015, ISO14001:2004 and GB/T28001:2001 successively obtained international system certification. Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 50 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China