



GYFTY Outdoor Fiber Optic Duct Cable G.652D 24-288 Cores

Our Product Introduction


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GYFTY
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km



Product Specification

- Item Mode: GYFTY
- Jacket Color: Black
- Fiber Type: G.652D
- Outer Jacket Material: HDPE
- Cable Diameter: 12.5 Mm
- Armored Type: NONE
- Application: Outdoor Duct Installation
- Fiber Count: 24/48/96/144/288
- Highlight: **G.652D Outdoor Fiber Optic Duct Cable, Telecommunication Outdoor Fiber Optic Duct Cable**

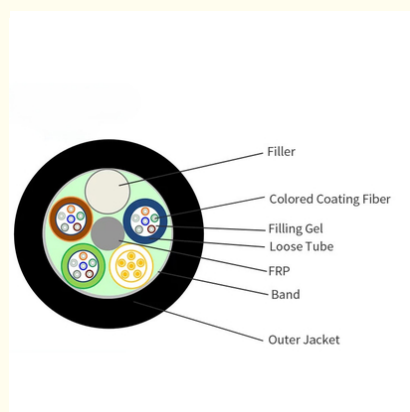

More Images



for more products please visit us on fiberoptical-cables.com

Product Description

Outdoor Fiber Optic Duct Cable GYFTY Fiber Optical Cable 1 – 216 Cores G.652D For Telecommunication


Product Specifications


Attribute	Value
Item mode	GYFTY
Jacket Color	Black
Fiber Type	G.652D
Outer Jacket Material	HDPE
Cable Diameter	12.5 mm
Armored Type	NONE
Application	Outdoor duct installation
Fiber Count	24/48/96/144/288

Product Description

The GYFTY outdoor fiber optic duct cable features FRP (Fiber Reinforced Plastic) as a non-metallic strength member at its core. The cable tubes, filled with waterproof compound, are stranded around this central member. A protective layer of aramid yarn and PE sheath completes the durable construction.

Available in fiber counts from 2 to 192 cores, this cable is specifically designed for long-distance communications in high-voltage areas. Its non-metallic reinforcement makes it ideal for environments where electrical interference must be avoided.

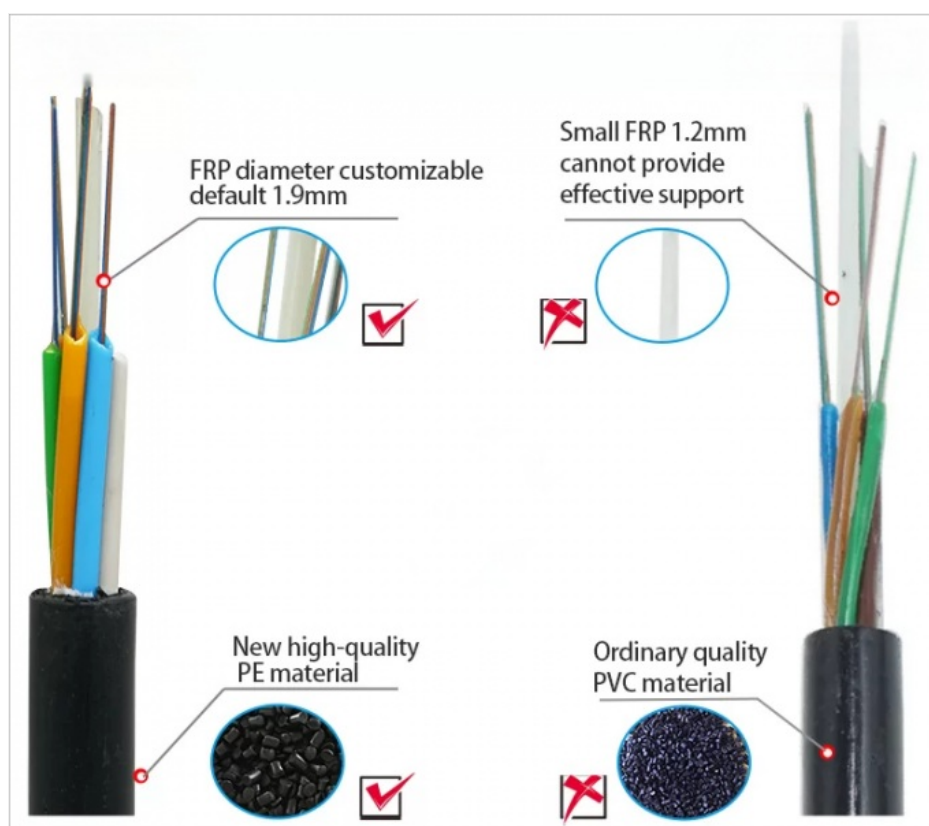

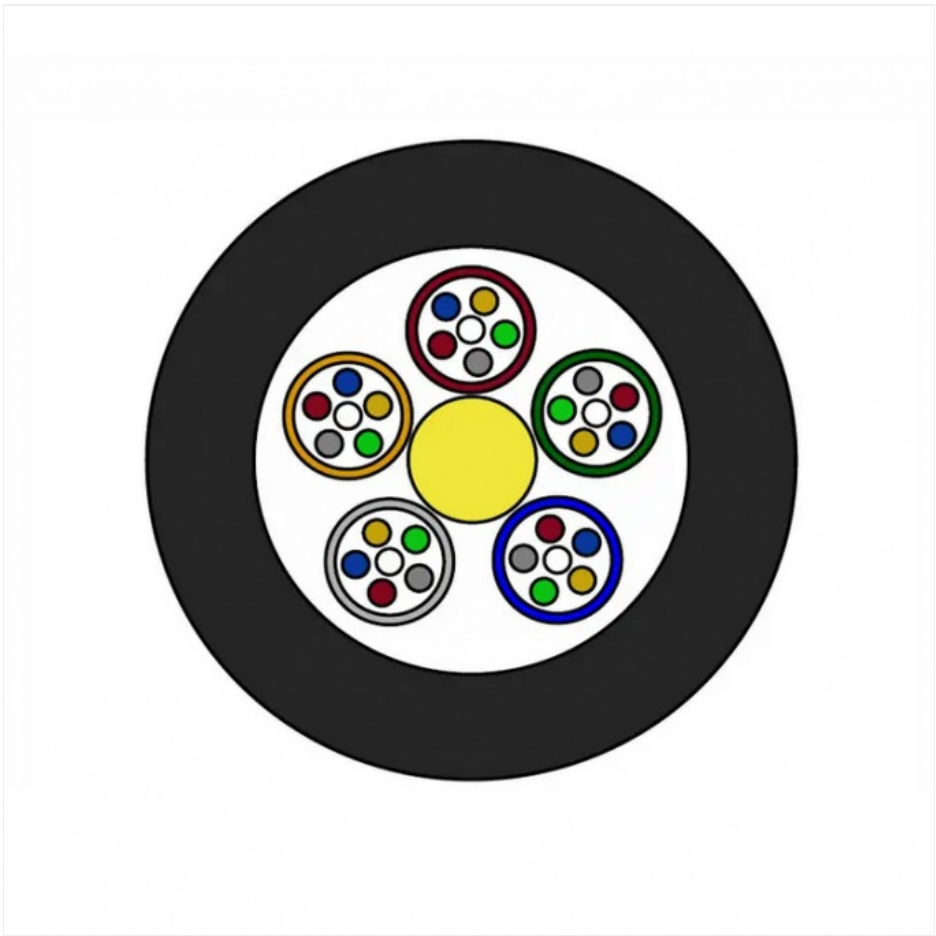




Technical Specifications


Parameter	8/12/24/36/48 Fibers	72 Fibers	96 Fibers	144 Fibers
Fibers per Tube	8/6/6/12/12	12	12	12
Loose Tubes	1/2/4/3/4	6	8	12
Central Strength Member	FRP (Fiber Reinforced Plastic)			
Outer Sheath Material	PE (Polyethylene)			
Cable Diameter (mm)	9.5 ±0.2	10.0 ±0.2	11 ±0.2	12.4 ±0.2
Max Working Tension (N)	2100	2400	2600	3000
Temperature Range (°C)	Installation: -0 to +50 Operation: -10 to +70			

Production & Quality Assurance



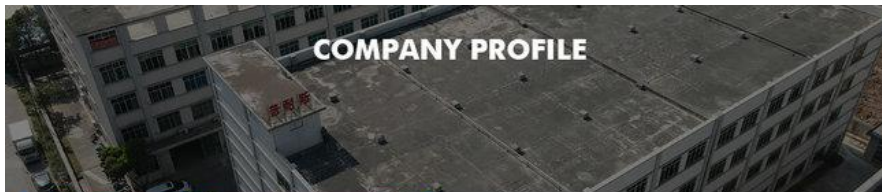

COMPANY PROFILE



ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001:2015, ISO14001:2004 and GB/T28001:2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc., domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



Custom Order Process

Send your purchase requirements to cotton@fibercablepuls.com

Our sales team will confirm specifications, packaging, and quantity

Sign contract or Proforma Invoice

Production begins after deposit receipt

Shipping coordination begins 2 weeks before completion



guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan International Guangzhou city, Guangdong province, China