ADSS Fiber Optical Cable LDPE Jacket 144 Core Fiber Optic Cable 9.5mm **Diameter**

Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: ADSS-144b1.3 Model Number:

• Minimum Order Quantity: 2km • Price: negotiate

Wooden Spool /drum · Packaging Details:

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

• Supply Ability: 100km



Product Specification

. Type: ADSS-144b1.3 Out Sheath: Double Jacket • Fiber: SM G652D Free Sample · Samples: Fiber Mode: Single Mode

. Sheath Material: HDPE MDPE(Double Jacket) 9.5mm ADSS Fiber Optical Cable, · Highlight: LDPE Jacket ADSS Fiber Optical Cable, 144 Core ADSS Fiber Optical Cable



Product Description

ADSS Fiber Optical Cable LDPE Jacket 144 Core Fiber Optic Cable 9.5mm Diameter Product Description

ASSS FIBER OPTIC CABLE MODEL: OFC-ADSS Fiber: SM G652D Strengthen: Aramid Yarn Jacket Diameter: 9.5mm Jacket Material: LLDPE Cable Length: 3Km/Drum

Details Images








Characteristics:

- 1. The cable's framework is fortified by dielectric material-based strength members, free from metallic
- A unique gel inside the tube delivers essential protection for the optical fibers.
 The central strength members, fabricated from FRP and enriched with Dupont's aramid yarn, contribute to the cable's durable build.
- 4. The cable attains remarkable attenuation, reflecting its high AT performance.
- 5. It exhibits reliable performance across various temperatures and includes anti-aging capabilities, diminishing the environmental stress on towers from harsh weather conditions.

Product Paramenters

Cable Structure						
NO.OF FIBER (CORES)	6/12/24	48	72	96	144	288
NO.OF FIBER (CORES)	1*6/2*6/4*6	6*8/4*12	6*12	8*12	12*12	24*12
Loose Tube Diameter	2.0±0.1	2.0±0.1	2.0±0.1	2.0±0.1	2.0±0.1	2.0±0.1
FRP central strenghth member(mm)	2.0	2.0	2.5	2.8	3.7	2.6
PE coted diameter	Nº			4.2	4.8	7.4
Tear rope(inner sheath)	2	2	2	2	2	2
Thickness of inner sheath(pe)	1.2	1.2	1.2	1.2	1.2	1.2
Out diameter of inner sheath	10.0	10.0	10.0	10.0	10.0	10.9
Reinforcing layer aramid	Domestic Armid Yarns	Domestic Armid Yarns	Domestic Armid Yarns	Domestic Armid Yarns	Domestic Armid Yarns	Domestic Armid Yarns
MAX.span(m)	50/100/120/150					
Thickness of outer sheath(pe)	1.8	1.8	1.8	1.8	1.8	1.8
Out diameter of Pe sheath	9.5±0.5	10±0.5	12.2±0.5	13.9±0.5	17.1±0.5	20.2±0.5
Climate condition	No ice, 25m/s max wind speed					

Factory Profile

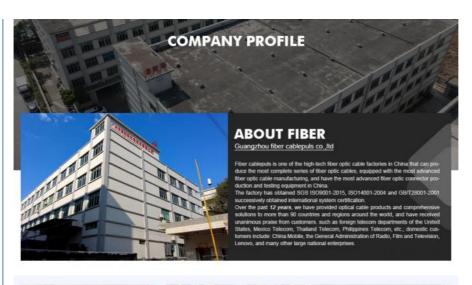



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM





HOT-SALE PRODUCT





FAQ

1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market (100.00%). There are total about 11-50 people in our factory.

2. how can we guarantee quality?

Always a pre-production sample before mass production;

Always final Inspection before shipment;

3.Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

4. Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design.we will offer you a reasonable price and make samples for you.

5. what services can we provide?

Accepted Delivery Terms: FOB,CIF,EXW

Accepted Payment Currency:USD,EUR,JPY,CAD,AUD,HKD,GBP,CNY,CHF; Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow;

Language Spoken: English, Chinese





+8613687956390



cotton@fibercablepuls.com



e fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province, China