



# Aerial Figure 8 Fiber Optic Cable Layer Stranded Light-Armored Figure 8 Cable

## **Basic Information**

Place of Origin: GUANGZHOU/CHINABrand Name: PUNAISGD/CABLEPULS

Certification: ISO/CE/ROSH
Model Number: GYTC8S
Minimum Order Quantity: 2km
Price: negotiate

Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25 days

• Payment Terms: 30% TT as deposit, 70% Balance before

shipping

• Supply Ability: 100km



# **Product Specification**

Type: GYTC8SAromored: Steel TapeOut Sheath Material: PE

Installation Method:
 Aerial

• Operating Temperature: -40°C To +70°C

• Application: Outdoor Aerial Installation

• Highlight: Aerial Figure 8 Fiber Optic Cable,

Stranded Light-Armored Figure 8 Cable



## **Product Description**

## Aerial Figure 8 Fiber Optic Cable Layer Stranded Light-Armored Figure 8 Cable

As a self-supporting <u>aerial fiber cable</u>, figure 8 fiber optic cable is a kind of fiber optic cable that is suitable for long-distance communication and inter-office communication. With steel stranded wire as the self-supporting part of the fiber optic cable, it can meet the very high tensile strength during installation and operation.


Figure 8 shape and steel wire messenger also save the installation costs. This cable is a small size figure 8 fiber optic cable. With advantages of light, flexible and easy to construction, it's also one of the alternative cable for FTTH cabling network.

#### **Products Description**



The GYTC8S is a standard self-supporting fiber optic cable, perfect for outdoor aerial use. Its notable moisture and crush resistance make it viable for duct and burial applications. The cable's metallic strength member, in the form of a figure-eight strand of wires, is sheathed in polyethylene. The cable's crush resistance and bullet resistance are thanks to its corrugated steel tape armor and polyethylene outer sheath. The tensile strength is improved by the central steel-wire strength member, which is complemented by a loose tube and a water-blocking system.

# **Details Images**

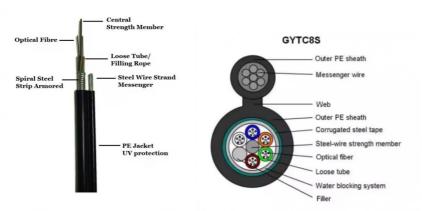


A Figure 8 non-armoured fiber cable is crafted with a variety of materials: a stranded loose tube for fiber protection, a central steel wire to strengthen the cable, a core filler compound to ensure a consistent round shape, fillers to reinforce the structure, and a steel wire coated with phosphating or galvanization to prevent corrosion.

## **Product Paramenters**

No. of cable		12	24	48
Fiber Model		G.652D		
Design (StrengthMember+Tube&Filler)		1+5		
Loose Tube	Material	PBT		
	Diameter ( ±0.06)mm	1.9	1.9	1.9
	Thickness ( ±0.03)mm	0.25	0.25	0.30
	The Max.Core NO./Tube	6	6	12
	Material	LDPE		
Filler Rope	Diameter ( ±0.05)mm	1.65	1.65	1.9
· '				

	NO.	3	1	1
Armoring	Material	Steel tape		
	Thickness(+0.03)mm	0.20		
Outer Sheath®	Material	MDPE		
	Thickness (±0.2)mm	1.5		
Outer Sheath@	Material	MDPE		

# **Company Profile**

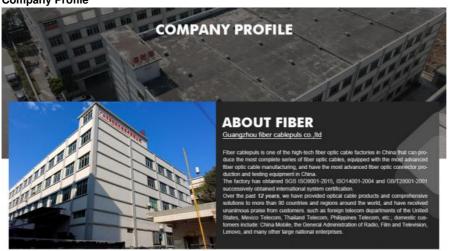



# **OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM**





## **HOT-SALE PRODUCT**





#### FAQ

## 1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market(100.00%). There are total about 11-50 people in our factory.

# 2. how can we guarantee quality?

Always a pre-production sample before mass production;

Always final Inspection before shipment;

### 3.Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

## 4. Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design we will offer you a reasonable price and make samples for you.

## 5. what services can we provide?

Accepted Delivery Terms: FOB,CIF,EXW

Accepted Payment Currency:USD,EUR,JPY,CAD,AUD,HKD,GBP,CNY,CHF; Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow;

Language Spoken: English, Chinese







cotton@fibercablepuls.com



fiberoptical-cables.com