



Aerial Figure 8 Fieber Optic Cable Uni-Tube Non-Armored Figure 8 Cable **GYXTC8S**

Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: **GYXTC8S** Model Number: • Minimum Order Quantity: 2km • Price: negotiate

· Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

100km • Supply Ability:



Product Specification


GYXTC8S . Type:

• Installation Method: Self-supporting

. Cable Type: Figure 8 Aerial · Application: PΕ Jacket Material: • Cable Color: Black

. Highlight: Aerial Figure 8 Fieber Optic Cable,

Figure 8 Fieber Optic Cable, Non-Armored Figure 8 Cable



Our Product Introduction

More Images



Product Description


Aerial Figure 8 Fieber Optic Cable Uni-Tube Non-Armored Figure 8 Cable GYXTC8S 1. Introduction of fiber optical fibers:

GYXTC8S optical cable loose tube cable style, figure-8 optical fiber cale jelly compound, optical fiber cable with S messemger wire.

filling compound and water-prood tape, Incorporation steel messenger wire suitable for overhead to premises, High strength, tracking-resistant sheath.

Stranded Wire
PE Sheath
Optical Fiber
Tube Filling Compound
Uni Tube
Cable Filling Compound
Water-blocking Material
PE Sheath

Products Description

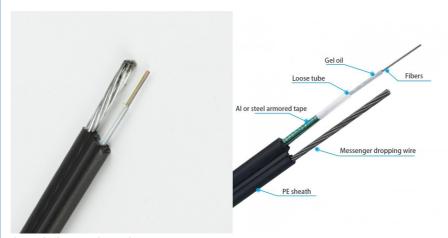

GYXTC8S Fiber Optic Cable

The GYXTC8S type cable incorporates a 250µm optical fiber encased within a slack tube crafted from a high-strength material, which is then saturated with a hydrophobic gel. This tube is subsequently enveloped with a steel tape that has been coated with a plastic on both sides (PSP), running in a longitudinal direction. To ensure the cable's tightness and its ability to prevent water from moving along its length, a water-blocking substance is interposed between the steel tape and the slack tube. The cable also features a steel strand that is arranged in an octagonal configuration, all encased within a polyethylene jacket.

Detail Images




Features:

- 1. The cable's steel wire strand boasts an exceptionally high tensile strength, facilitating self-supporting aerial installation and consequently cutting down on the expenses associated with deployment.
- 2.It exhibits superior mechanical and thermal characteristics.
- 3. The material of the loose tube is inherently resistant to hydrolysis and possesses considerable strength.
- 4. The interior of the tube is filled with a proprietary grease that safeguards the fiber.
- 5. The dual-layer steel strip (PSP) enhances the cable's resistance to moisture.
- 6.It features a compact diameter, making it lightweight and straightforward to install.
- 7.It is available in long lengths and is cost-effective.

Product Paramenters

Fiber Model		G.652D	
Loose Tube	Material	PBT	
	Diameter (±0.1)mm	1.8	2.0 . 8
	Thickness (±0.05)mm	0.30	
Water Blocking la	ayer(Material)	Water Blocking Tape	
	Material	Steel Tape	
Armoring	Thickness (±0.03)mm	0.2	
Messenger Wire	Material	Galvanized steel strand	
	Size (±0.05)mm	2.7mm	
Web	Material	MDPE	
	Size (±0.1)mm	2.0 ×3.0	
Outer Sheath	Material	MDPE	
	Thickness (±0.1)mm	1.2	
Outer Sheath	Material	MDPE	
	Thickness (±0.1)mm	1.5	
Cable Diameter (±0.5)mm		7.0* 11.5	7.0*11.5 1 3 7.0*11.5 1 3
Cable Weight (±10)kg		80	80 9 4
Min. bending radius	Without Tension	10.0 ×Cable-φ	
	Under Maximum Tension	20.0 ×Cable-φ	
Temperature range	Installation	-20~+60	
	Transport&Stora ge	-40~+70	
	Operation	-40~+70	

Company Profile

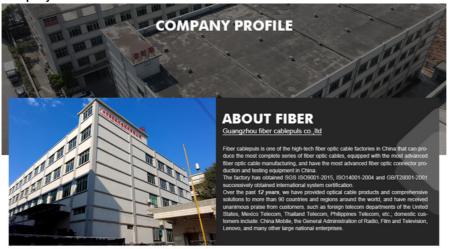



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM







HOT-SALE PRODUCT



1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market(100.00%). There are total about 11-50 people in our factory.

2. how can we guarantee quality?

Always a pre-production sample before mass production; Always final Inspection before shipment;

3.Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

4. Can you do OEM for me?

We accept all OEM orders just contact us and give me your design we will offer you a reasonable price and make samples for you.

5. what services can we provide?

Accepted Delivery Terms: FOB,CIF,EXW

 ${\bf Accepted\ Payment\ Currency: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF;}$ Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow;

Language Spoken: English, Chinese



+8613687956390

cotton@fibercablepuls.com

fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province, China