




Outdoor Fiber Optic Cable GYTXW 2 4 6 Core Single Mode G652D Fiber Optical Cable

Our Product Introduction

for more products please visit us on fiberoptical-cables.com

Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GYXTW-6B1.3
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km



Product Specification

- Model No: GYXTW-12B1.3
- Use: Aerial
- Loose Tube Material: PBT With Jelly
- Cable Diameter: 8mm
- Samples: Free
- Fiber Grade: G652D
- Waterblocking Material: Water Blocking Tape Or Filling Compound
- Steel Wire: 1.0*2mm
- Cable Color: Black
- Highlight: Single Mode Outdoor Fiber Optic Cable, G652D Outdoor Fiber Optic Cable, Outdoor Fiber Optic Cable GYTXW



Product Description

Outdoor Fiber Optic Cable GYTXW 2 4 6 Core Single Mode G652D Fiber Optical Cable

Hot Sell 2 / 4 / 6 / 8 / 12Core Singlemode Outdoor Armoured GYXTW Fiber Optic Cable GYXTW Wholesale 1-12 Core PSP Enhancing Moisture-proof Armored Center Loose Tube GYXTW Fiber Optic Cable,Manufacturing GYXTW Central tube outdoor aerial 16 core fiber optic cable ,Wholesale 1-12 Core PSP Enhancing Moisture-proof Armored Center Loose Tube GYXTW Fiber Optic Cable ,outdoor loose tube 12 core SM cable armoured two steel wire fibre optic cables GYXTW cable wholesale

GYXTW Fiber Optic Cable Technical Specifications

Parameter	Specification
Cable Type	GYXTW
Fiber Type	G652D Single-Mode Fiber
Number of Cores	12 Cores
Outer Diameter	8 mm
Cable Structure	Central strength member, loose tube, steel wire armoring, PE sheath
Fiber Core Parameters	
- Mode Field Diameter	8.6 - 9.5 μm @ 1310 nm
- Cladding Diameter	125.0 $\pm$ 0.7 μm

Our Product Introduction

Parameter	Specification
- Core/Cladding Concentricity	$\leq 0.5 \mu\text{m}$
- Coating Diameter	$245 \pm 5 \mu\text{m}$
- Attenuation	$\leq 0.36 \text{ dB/km @ } 1310 \text{ nm}, \leq 0.22 \text{ dB/km @ } 1550 \text{ nm}$
- Dispersion	$\leq 3.5 \text{ ps/(nm}\cdot\text{km) @ } 1288\text{-}1339 \text{ nm}, \leq 18 \text{ ps/(nm}\cdot\text{km) @ } 1550 \text{ nm}$
- Zero Dispersion Wavelength	1300 - 1324 nm
- Cable Cutoff Wavelength	$\leq 1260 \text{ nm}$
- Bend Radius	20x cable diameter (static), 10x cable diameter (dynamic)
Mechanical Properties	
- Tensile Strength	600 N (short-term), 1500 N (long-term)
- Crush Resistance	3000 N/100 mm
- Impact Resistance	1 N·m (1 kg, 1 m drop)
Environmental Properties	
- Operating Temperature	-40°C to +70°C
- Storage Temperature	-50°C to +80°C
- Water Resistance	Passes IEC 60794-1-F5B water penetration test
Standards Compliance	ISO 9001, RoHS, IEC 60793, IEC 60794

Key Features

G652D Fiber: Ideal for long-distance, high-bandwidth applications with low attenuation and excellent dispersion characteristics.

Steel Wire Armoring: Provides superior mechanical protection and tensile strength.


PE Sheath: Ensures durability and resistance to environmental factors such as UV, moisture, and abrasion.



APPLICATION



GYXTW Cable Place Order Information

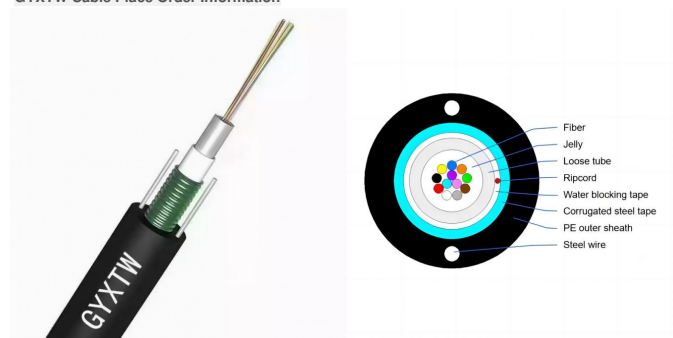

Cable data

Fiber count	Structure	Fibers per tube	Loose tube diameter (mm)	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mm)	Cable diameter/Height (mm)	Cable weight (kg/km)
2	1	2	1.7±0.1	1.0/1.0	1.6	8.0±0.2	57
4	1	4	1.85±0.1	1.0/1.0	1.6	8.0±0.2	58
6	1	6	1.9±0.1	1.0/1.0	1.6	8.0±0.2	58
8	1	8	2.0±0.1	1.0/1.0	1.6	8.0±0.2	60
12	1	12	2.2±0.1	1.0/1.0	1.6	8.0±0.2	60

Fiber Parameters

No.	Items		Unit	Specification
				G.652D
1	Mode Field Diameter	1310nm	μm	9.2±0.4
2	Cladding Diameter	1550nm	μm	10.4±0.8
3	Cladding Non-Circularity		%	125.0±1.0
4	Core-Cladding Concentricity Error		μm	≤1.0
5	Coating Diameter		μm	≤0.5
6	Coating Non-Circularity		%	245±5
7	Cladding-Coating Concentricity Error		μm	≤6.0
8	Cable Cutoff Wavelength		nm	≤12.0
				λ _c ≤1260
9	Attenuation(max.)	1310nm	dB/km	≤0.35
		1550nm	dB/km	≤0.21
		1380nm	dB/km	≤0.35
		1625nm	dB/km	≤0.24
10	Attenuation and wavelength	1310nm 1285-1330nm	dB/km	≤0.04
		1550nm 1525-1575nm	dB/km	≤0.03
		1550nm 1480-1580nm	dB/km	≤0.05
11	Dispersion	1288-1339nm	ps/(nm.km)	≥-3.5, ≤3.5
		1271-1360nm	ps/(nm.km)	≥-5.3, ≤5.3
		1480-1580nm	ps/(nm.km)	≤20
		1550nm	ps/(nm.km)	≤18
12	Zero dispersion wavelength		Nm	1300-1324
13	Zero dispersion slope		ps/(nm ² •km)	≤0.092
14	Typical value		ps/(nm ² •km)	0.04
15	Largest individual fiber		Ps/√ km	0.2
16	Link design values		Ps/√ km	0.1
17	Two way average		1310nm-1550	≤0.01dB

Steel wire 0.7x2

Loose tube :2.2mm

Diameter :7.1



Cable Marking&Fibers Colors

COMPANY Fiber cable name N*cores G.652D 2024 XXXXm


*The marking is printed every 1 meter;

***G.652D* means ITU-T Rec. Low Water Peak (LWP) G.652 single mode optical fiber..

Also can according to client cable marking.



Production Supplier Profile

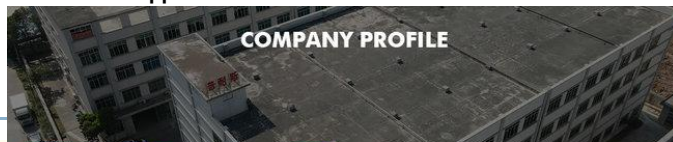

COMPANY PROFILE



ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001:2015, ISO14001:2004 and GB/T28001:2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc., domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



+8613687956390



cotton@fibercabl



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong
province,China