



## GYTA33 Anti Rodent Fiber Optic Cable Double Armored SM 96-288 Core

Our Product Introduction

### Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD
- Certification: ISO/CE/ROSH
- Model Number: GYTA33-48B1.3
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km




### Product Specification

- Item No: GYFTY33-24B1.3/12B1.3
- Rodent Protection: Steel Wires Around
- Jacket Color: Black PE
- Fiber Type: G.652D
- Application: Underwater Display
- Armored: Steel Wires Around
- Highlight: **SM Fiber Optic Cable,  
Double Armored Fiber Optic Cable,  
GYTA33 Fiber Optic Cable**



### More Images



for more products please visit us on [fiberoptical-cables.com](http://fiberoptical-cables.com)

Product Description

Anti Rodent Fiber Optic Cable GYTA33 Double Armored SM 96 144 288 Core

Product Specifications

Attribute	Value
Item No	GYFTY33-24B1.3/12B1.3
Rodent Protection	Steel wires around
Jacket Color	Black PE
Fiber Type	G.652D
Application	Underwater display
Armored	Steel wires around


Product Description



GYTA33 optical cable is designed for underground use with steel wire armor, making it suitable for harsh environments and direct burial applications. The cable utilizes loose tube technology, providing excellent secondary performance by allowing fibers to move freely while maintaining stress-free conditions under longitudinal stress.

The GYTA33 armored fiber optic cable features a multi-layer structure:

- Optical fiber core
- Fiber loose tube
- Loose tube filler
- Steel wire extrusion layer
- Aluminum-plastic composite tape
- PE sheath layer

This construction provides exceptional protection against stretching, compression, bending, aging, and corrosion. The PE sheath offers moisture, water, and UV resistance. Ideal for direct burial in mountainous or hilly terrain with high tensile requirements, as well as stable underwater installations.

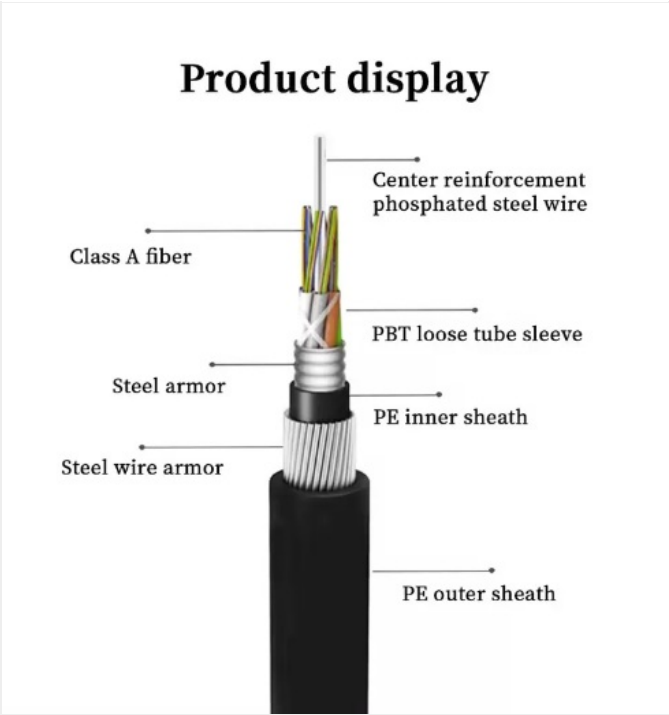

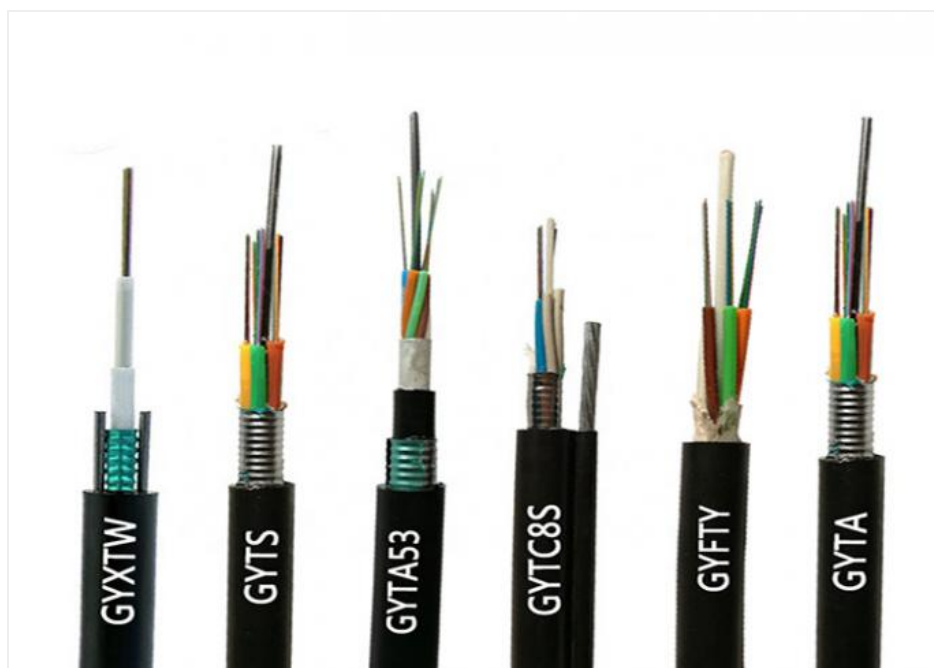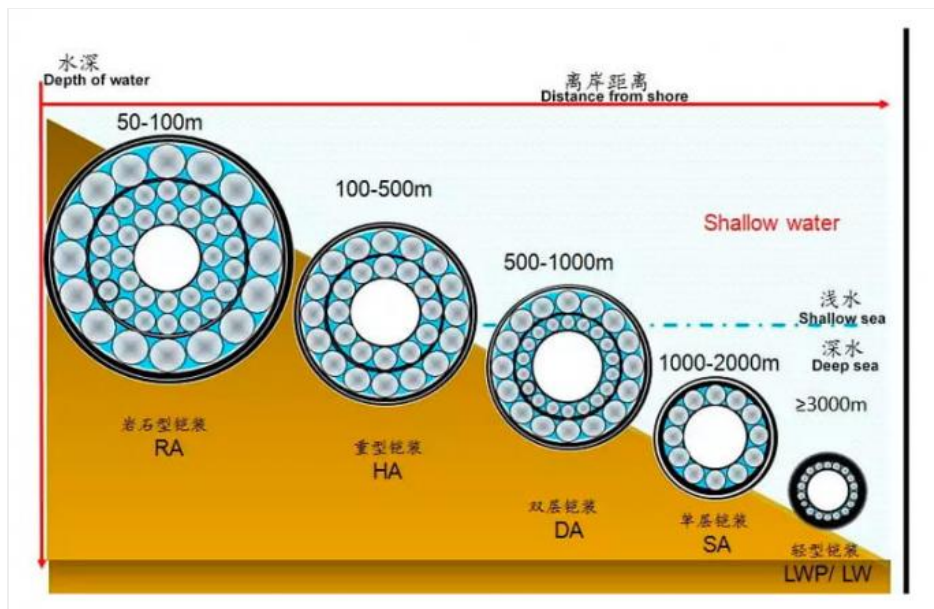





Fiber Count	Structure	Diameter (mm)	Weight (kg/km)	Tensile (N) Long/Short term	Crush (N) Long/Short term	Bending Radius (mm) Static/Dynamic
2-30	1+5	12.8	268	4000/10000	3000/5000	12.5D/25D

#### Fiber Parameters (G.652D)

Parameter	Unit	Specification
Mode Field Diameter (1310nm)	μm	9.2±0.4



## COMPANY PROFILE



### ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001-2015, ISO14001-2004 and GB/T28001-2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc., domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



### OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



#### Ordering Information

To place an OEM or customized order:

Send your purchase intention to [cotton@fibercablepuls.com](mailto:cotton@fibercablepuls.com)

Our sales team will confirm product specifications, packaging, and quantity

Sign contract or Proforma Invoice

Production begins after deposit receipt  
Shipping arrangements notified 2 weeks before completion



**guangzhou fiber cablepuls co ltd**



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong  
province,China