

Anti Rodent Fiber Optic Cable GYXTY Uni-Loose Tube SWA Armor Single **Jacket Cable**

Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: GYXTS-12B1.3 Model Number:

• Minimum Order Quantity: 2km

• Price: negotiable

· Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25days

Payment Terms: 30%TT as deposit,70%Balance before

shipping.

• Supply Ability: 100km




Product Specification

GYXTY-12B1.3 • Item No.: · Armored Type: Steel Tape

Steel Wire Surround • Strength Member:

PΕ Jacket Material: · Application: Pipeline • Warranty Period: 25 Years

. Highlight: **GYXTY Anti Rodent Fiber Optic Cable, GYXTY Single Jacket Fiber Optic Cable**



Product Description

Anti Rodent Fiber Optic Cable GYXTY Uni-Loose Tube SWA Armor Single Jacket Cable

Product Construction: Fiber: 1-24fibers 250µm colored fiber Uni-loose tube gel-filled

Strength Member: Overall Steel Wire Armored

Outer Jacket: Black UV and waterproof polyethylene (PE).

Features:

Uni-tube gel-filled construction for superior fiber protection.

Overall Steel wire provide high tensile strength and crush resistant.

Compact, easy to install. UV and waterproof design.

Applications:

Inter building voice or data communication. Aerial or underground conduit installation.

FTTx, access



Key Features

1. Central Loose Tube Design

The optical fibers are housed securely within a central loose tube, offering a compact and stable structure that enhances transmission performance.

2. Steel Wire Armoring

High-strength steel wire armor protects the cable from mechanical damage and external pressure, ensuring excellent tensile strength and durability.

3. Rodent Protection

The armored layer acts as a natural shield against rodent attacks, extending the cable's service life in challenging environments.

4. PE Outer Sheath

The premium Polyethylene (PE) sheath provides superior resistance to moisture, UV rays, and extreme weather, making it ideal for outdoor installations.

5. A-Grade Fiber

Incorporates A-grade fiber with low attenuation and signal loss, ensuring high-speed, stable, and long-distance data transmission.

6. Customizable Options

Available in configurations from 2 to 24 fibers, offering flexibility for various network requirements.

Fiber count	Nominal Diameter (mm)	Nominal Weight (kg/km)	Max fiber Per tube	tube Diameter	l ensile load	Allowable Crush resistance Long/short (N/10cm)
2-6	6.8	60	2-6	2.5	1000/600	600/300
8-12	7.3	70	8-12	3.0	1000/600	600/300
14-24	7.8	83	14-23	3.6	1000/600	600/300
> 24	Available upon customer' s request					

Applications

Telecommunications Networks: Ideal for backbone networks, metropolitan area networks (MAN), and access networks. Industrial Cabling: Suitable for factories, mines, and other harsh environments.

Railway and Highway Communication Systems: Ensures reliable communication over long distances.

Underground Duct Installations: Resistant to rodent damage and external pressure, perfect for subterranean environments.

Technical Specifications

Why Choose Our Optical Cable?


Manufacturing Excellence: High-tech enterprise with factory-direct quality assurance.

A-Grade Fiber: Ensures superior performance and low signal attenuation.

PE Sheath: Provides robust environmental protection and durability. Custom Solutions: Flexible customization to meet your specific needs.

Global Service: Reliable partner for fiber optic communication solutions worldwide.

Production Supplier Profile

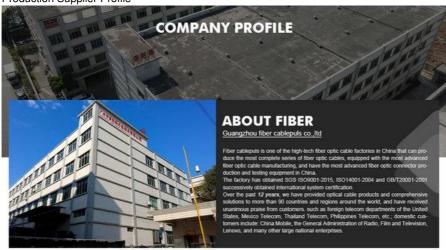



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM





How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.







