



ADSS Fiber Optic Cable All Dielectric Self-supporting Aerial Cable

Our Product Introduction

for more products please visit us on fiberoptical-cables.com


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAI SGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: ADSS fiber optic cable
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool $\Phi 1200 \times 750$ mm
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit, 70%Balance before shipping.
- Supply Ability: 100km



Product Specification

- Type: ADSS Fiber Optic Cable
- Fiber Type: Single Mode/multimode
- Fiber Count: 6/12/24/36/48/72/96/144
- Outer Sheath: Black PE
- Installation Method: Aerial
- Strength Member Material: FRP/ARMID YARN
- Production Capacity: 200km Per Day
- HS Code: 854470000
- Highlight: **ADSS Fiber Optic Cable,
Aerial ADSS Fiber Optic Cable,
All Dielectric Self-supporting Aerial Cable**



Product Description

ADSS Fiber Optic Cable All Dielectric Self-supporting Aerial Cable

The self supporting aerial cables is loose tube stranded. 250 μ m fibers are positioned into a loose tube made of high modulus plastics. The tubes are filled with a water-resistant filling compound. The tubes (and fillers) are stranded around a FRP (Fiber Reinforced Plastic) as a non-metallic central strength member into a compact and circular cable core. The cable core is not only filled with filling compound, but also covered with thin PE (polyethylene) inner sheath. The stranded layer of aramid yarns are applied over the inner sheath as strength member. Therefore, the cable is completed with PE or AT (anti-tracking) outer sheath. ADSS has good performance of tensile strength and temperature.

All-dielectric self-supporting (ADSS) cables are manufactured with an FRP dielectric central strength member, with multiple loose tube optical fibres. The external jacket is UV stabilised and extremely resistant to the ingress of moisture, with operating temperatures from -40-+70 degrees, the cables are suitable for installation to 11kV power lines.

Features:


- Can be installed without shutting off the power
- Light weight and small diameter reducing the load caused by ice and wind and the load on towers and backprops
- Large span lengths
- Good performance of tensile strength and temperature
- The design life span is 30 years

ADSS Cable Place Order Information

--

Our Product Introduction

Fiber count	Structure	Fibers per tube	Loose tube diameter (mm)	CSM diameter/pad diameter (mm)	Nominal Thickness of outer jacket (mm)	Cable diameter/Height (mm)	Cable weight (kg/km)
4	1+6	4	1.9±0.1	2.0/2.0	1.6	9.5±0.2	80
6	1+6	6	2.0±0.1	2.0/2.0	1.6	9.8±0.3	80
8	1+6	4	1.9±0.1	2.0/2.0	1.6	9.8±0.3	80
12	1+6	6	2.1±0.1	2.0/2.0	1.6	9.8±0.3	80
24	1+6	12	2.1±0.1	2.0/2.0	1.6	9.8±0.3	80
36	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
48	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
72	1+6	12	2.2±0.1	2.0/2.0	1.6	10.0±0.3	85
96	1+8	12	2.2±0.1	2.0/3.4	1.7	11.8±0.3	123
144	1+12	12	2.2±0.1	3.0/6.2	1.7	14.5±0.3	175

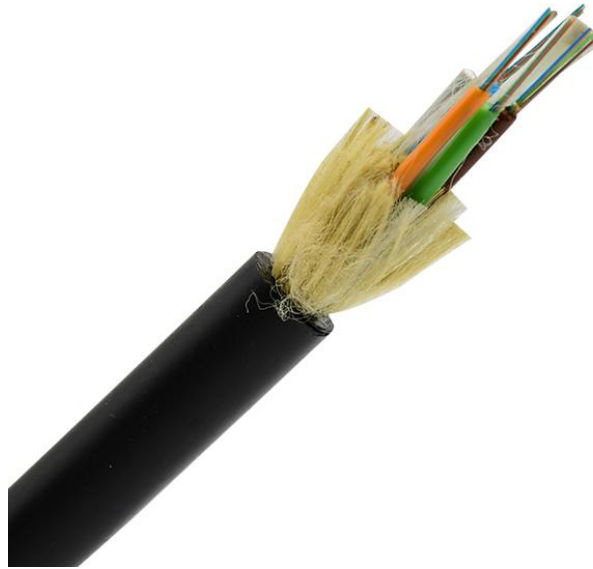

Fiber Parameters				
No.	Items		Unit	Specification
				G.652D
1	Mode Field Diameter	1310nm	μm	9.2±0.4
		1550nm	μm	10.4±0.8
2	Cladding Diameter		μm	125.0±1.0
3	Cladding Non-Circularity		%	≤1.0
4	Core-Cladding Concentricity Error		μm	≤0.5
5	Coating Diameter		μm	245±5
6	Coating Non-Circularity		%	≤6.0
7	Cladding-Coating Concentricity Error		μm	≤12.0
8	Cable Cutoff Wavelength		nm	λ _c ≤1260
9	Attenuation(max.)	1310nm	dB/km	≤0.35
		1550nm	dB/km	≤0.21
		1380nm	dB/km	≤0.35
		1625nm	dB/km	≤0.24
10	Attenuation and wavelength	1310nm 1285-1330nm	dB/km	≤0.04
		1550nm 1525-1575nm	dB/km	≤0.03
		1550nm 1480-1580nm	dB/km	≤0.05
11	Dispersion	1288-1339nm	ps/(nm.km)	≥-3.5, ≤3.5
		1271-1360nm	ps/(nm.km)	≥-5.3, ≤5.3
		1480-1580nm	ps/(nm.km)	≤20
		1550nm	ps/(nm.km)	≤18
12	Zero dispersion wavelength		Nm	1300-1324
13	Zero dispersion slope		ps/(nm ² ·km)	≤0.092
14	Typical value		ps/(nm ² ·km)	0.04
15	Largest individual fiber		Ps/√ km	0.2
16	Link design values		Ps/√ km	0.1
17	Two way average	1310nm-1550		≤0.01dB

Benefits of ADSS Cable

ADSS cables rely solely on their dielectric properties, eliminating the need for metal support structures and reducing installation costs.

Designed to withstand high electric fields, ADSS cables perform reliably near high-voltage power lines without interference from electromagnetic fields.

With superior weather resistance and tensile strength, ADSS cables excel in harsh environments like coastal areas and high altitudes, ensuring long-term performance.




Applications of ADSS Cables



Optical Fiber Hardware for ADSS cables



Production Supplier Profile

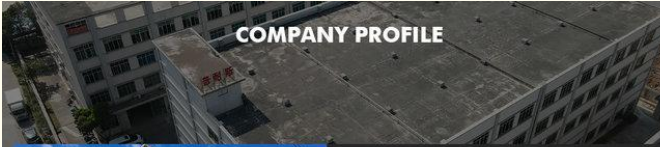

COMPANY PROFILE

ABOUT FIBER

Guangzhou fiber cablepulps co.,ltd

Fiber cablepulps is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001:2015, ISO14001:2004 and GB/T28001-2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



+8613687956390 cotton@fibercabl



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China