




Outdoor Fiber Optic Cable 2-24cores GYXTW53 Outdoor Fiber Optic Cable, Double-Armor Double-Sheath Central Loose Tube Aerial Optical Fiber Cable

Our Product Introduction

for more products please visit us on fiberoptical-cables.com


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GYXTW53
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km



Product Specification

- Model No: GYXTW53
- Use: Underground
- Samples: Free
- Fiber Grade: G652D/ G657A1
- Waterblocking Material: Water Blocking Tape Or Filling Compound
- Steel Wire: 0.7*2mm
- Cable Color: Black



More Images



Product Description

2-24cores GYXTW53 Outdoor Fiber Optic Cable, Double-armor double-sheath central loose tube aerial Optical Fiber Cable

Description:

GYXTW53 Double-armor double-sheath central loose tube aerial [fiber optic Cable](#), constructed with a central tube filled with water blocking jelly giving it excellent water and moisture resistance. Two corrugated steel armouring and two steel wires strengthening with in the inner PE sheath and an outer PE sheath give this cable excellent tensile strength, mechanical and environmental protection. They have small diameter, light weight and installation friendly since they come in a single tube with loose tube fiber count up to 12 fibers. Their compact construction protects the loose tube from shrinking, the double armour makes it crush, rodent and impact resistance, the outer PE sheath gives it ultraviolet protection.

Technical parameters

Our Product Introduction

Cable Type	Fiber Count	Cable Diameter Mm	Cable Weight Kg/km	Tensile Strength Long/short term N	Crush Resistance Long/short term N/100mm	Bending Radius Static/dynamic mm
GYXTW53-2~12	2~12	12.0	165	1000/3000	1000/3000	10D/20D


Storage/Operating Temperature : -40°C to + 70°C

Features:

- Good mechanical and temperature performance
- High strength loose tube that is hydrolysis resistant
- Special tube filling compound ensure a critical protection of fiber
- Crush resistance and flexibility
- PSP enhancing moisture-proof
- Two parallel steel wires ensure tensile strength
- PE sheath gives excellent UV protection
- Small diameter, light weight and friendly installation
- Long delivery length

Application:

1. Adopted to Outdoor distribution
2. suitable for outdoor distribution through ducts, conduits or aerial pipe lines.
3. Long distance and local area network communication
4. Used outdoor cabling

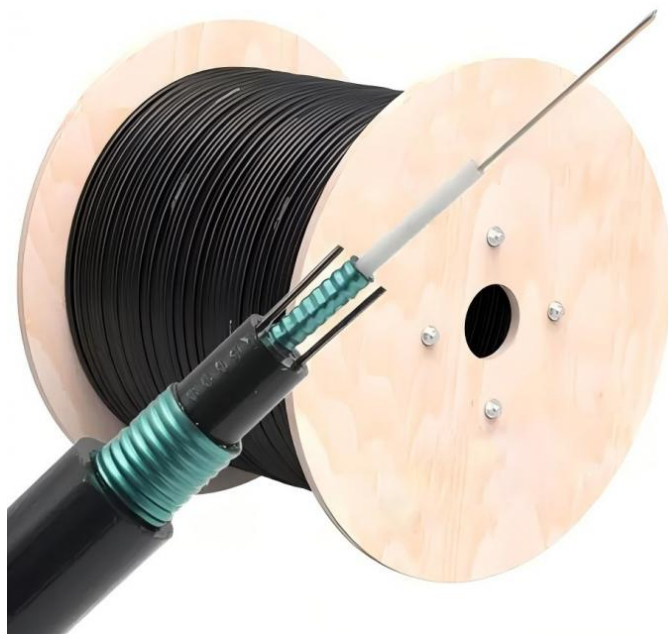

APPLICATION



Steel wire 0.7x2

Loose tube :2.2mm

Diameter :7.1



Cable Marking&Fibers Colors

COMPANY Fiber cable name N*cores G.652D 2024 XXXXm


*The marking is printed every 1 meter;

***G.652D* means ITU-T Rec. Low Water Peak (LWP) G.652 single mode optical fiber..


Also can according to client cable marking.



Production Supplier Profile

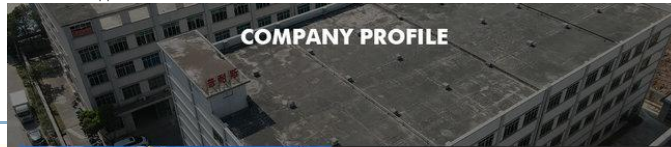

COMPANY PROFILE



ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001:2015, ISO14001:2004 and GB/T28001:2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 50 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



+8613687956390 cotton@fibercabl



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong
province,China