

# outdoor fiber optic cable fiber optic fibra underground GYTS steel tape armored

### **Basic Information**

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms:

- GUANGZHOU/CHINA PUNAISGD/CABLEPULS

- Supply Ability:
- ISO/CE/ROSH GYTS 2km negotiate Wooden Spool /drum 5-25 days 30% TT as deposit, 70% Balance before shipping 100km



### **Product Specification**

- Item:
- Strength Member:
- Sheath Material:
- Armoured:
- Fiber Mode:
- Fiber:
- Highlight:
- Steel ΡE Steel Tape Multi Mode G652D, G657A1 g652d fiber drop cable, g652d fiber optic cable

GYTS



#### More Images



## **GYTS Outdoor Fiber Optical Cable**

## **Products Description**



The GYTS fiber optic cables, featuring an armored construction around a loose tube and a singular jacket/armor, are designed to furnish a considerable fiber capacity. They are epitomes of adaptability and versatility, ideal for the rigorous standards of today's installations, encompassing both duct and underground conduit applications.

## **Product Details**



#### Features:

1. The cables demonstrate exceptional mechanical properties and temperature stability, suitable for a wide range of applications.

2. The loose tube material is highly resistant to hydrolysis and is notably strong.

- 3.A solitary steel wire acts as the backbone of the cable, withstanding axial stresses.
- 4. The PE sheath offers a protective barrier against UV radiation, safeguarding the cable.
- 5. The cable core is densely filled to ensure structural integrity.

6. The longitudinal corrugated steel tape envelops the cable core, delivering excellent resistance to compression.

#### Cable structure

-Metallic(non-metallic) strength member;

-Loose tube stranded;-corrugated steel tape armored;

-Gel filling;


-Polyethylene sheath outdoor cable for communication purpose;

### **Product Paramenters**

Fiber count	Structure	Fibers per tube	Loose tube diameter (mm)	CSM diameter/pad diameter (mm	Nominal Thickness of outer jacket (mm	Cable diameter/ Height (mm)	Cable weight (kg/km)
4	1+5	4	1.8±0.1	1.4/1.4	1.4	9.0±0.3	80
6	1+5	6	1.9±0.1	1.4/1.4	1.4	9.0±0.3	80
8	1+5	8	1.9±0.1	1.4/1.4	1.4	9.0±0.3	80
12	1+5	6	1.9±0.1	1.4/1.4	1.4	9.0±0.3	80
24	1+5	6	1.9±0.1	1.4/1.4	1.4	9.0±0.3	85
36	1+6	12	2.2±0.1	1.6/1.6	1.6	9.7±0.3	100
48	1+5	12	2.2±0.1	1.6/1.6	1.6	9.7±0.3	105
60	1+5	12	2.2±0.1	1.6/1.6	1.6	9.7±0.3	110
72	1+6	12	2.2±0.1	2.0/2.0	1.6	10.6±0.3	122
96	1+8	12	2.2±0.1	1.6/3.5	1.6	12.0±0.3	160
144	1+12	12	2.2±0.1	2.0/6.4	1.8	15.6±0.3	240
216	1+6+12	12	2.2±0.1	2.2/2.2	1.8	16.0±0.3	270
288	1+9+15	12	2.2±0.1	2.2/4.3	2.0	18.2±0.3	282

## **Company Profile**



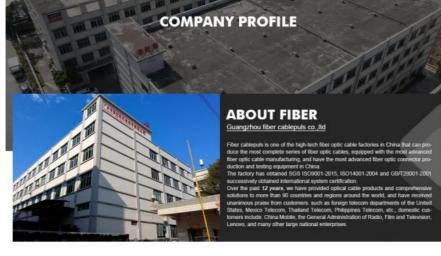



### OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



Color Fiber Testing

A Stranded Loose Tube

Finished Cable Testing



# **HOT-SALE PRODUCT**





### FAQ

#### 1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market (100.00%). There are total about 11-50 people in our factory.

#### 2. how can we guarantee quality?

Always a pre-production sample before mass production; Always final Inspection before shipment;

#### 3.Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

#### 4. Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design.we will offer you a reasonable price and make samples for you.

#### 5. what services can we provide?

Accepted Delivery Terms: FOB,CIF,EXW Accepted Payment Currency:USD,EUR,JPY,CAD,AUD,HKD,GBP,CNY,CHF; Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow; Language Spoken:English,Chinese

