




GCYFY Air Blown Micro Cable Stranded Loose Tube 48 Cores 72 Cores 96 Cores

Our Product Introduction

for more products please visit us on fiberoptical-cables.com


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GCYFY-72b1.3
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km



Product Specification


- Model: GCYFY-72B1.3
- Jacket Material: PE/LSZH
- Fiber Count: 24/48/96/144/288
- Fiber Type: G.652D
- Storage Temperature: -40°C To +70°C
- Strength Member: FRP
- Application: Air Blown Micro Cable
- Highlight: GCYFY Air Blown Micro Cable, Loose Tube Air Blown Micro Cable, 96 Cores Air Blown Cable



Product Description



Air Blown Micro Cable GCYFY Stranded Loose Tube 48 Cores 72 Cores 96 Cores
8 Cores 72 Cores 96 Cores

Our Product Introduction

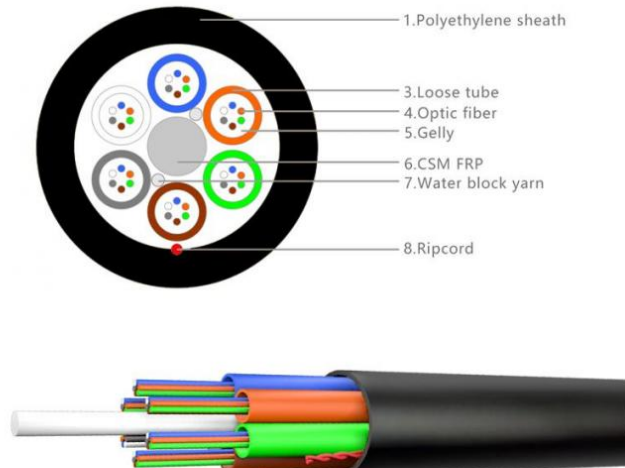

Characteristics

- Small overall diameter, lightweight, moderate hardness, suitable for air-blow installation.
- Non- metallic structure, no need for grounding.



TECHNICAL DATA SHEET


fiber count	CSM diameter	nominal thickness of outer jacket	cable diameter	cable weight	crush resistance (N)	Bending radius
2-12	1.4/1.4	1.6	3.5	11	150/450	10D/20D
14-24	1.4/1.4	1.6	4.1	14	150/450	10D/20D
26-72	1.4/1.4	1.6	5.0	22	150/450	10D/20D
74-96	1.4/1.4	1.6	5.9	33	150/450	10D/20D
98-120	1.4/1.4	1.6	7.0	43	150/450	10D/20D
122-144	1.6/1.6	1.6	7.7	52	150/450	10D/20D
146-216	1.6/1.6	1.6	7.9	52	150/450	10D/20D
218-288	1.6/1.6	1.6	9.0	72	150/450	10D/20D
Item				Unit	Specification	
Fier Tyoe				G652D	G652D	
Mode filed Diameter		1310nm	μm		9.2±0.4	
		1550nm	μm		10.4±0.8	
Cladding diameter				μm	125.0±0.1	
Cladding non-circularity				%	≤1.0	
Core/cladding concentricity error				μm	≤0.5	
Coating diameter				μm	245±7	
Coating/cladding concentricity error				μm	≤12	
Cable cut-off wavelength				μm	≤1260	
Attenuation Coefficient		1310nm	db/km		≤0.36	
		1550nm	db/km		≤0.22	
Proof stress level				kpsi	≥100	
Note: Other parameters meet standard ITU-T G.652						

Cable Marking&Fibers Colors


COMPANY Fiber cable name N*cores G.652D 2024 XXXXm

*The marking is printed every 1 meter;
 ***"G.652D" means ITU-T Rec. Low Water Peak (LWP) G.652 single mode optical fiber..

Also can according to client cable marking.

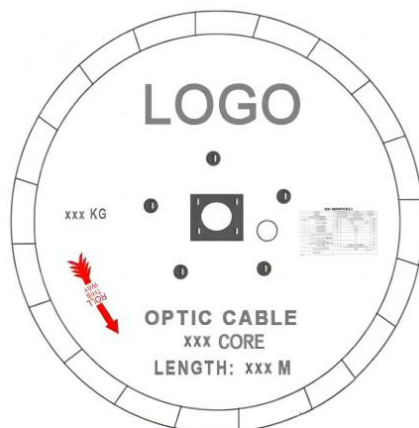

Production Supplier Profile

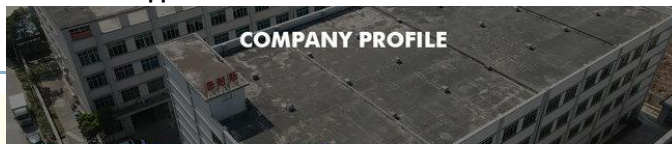

COMPANY PROFILE



ABOUT FIBER
 Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001:2015, ISO14001:2004 and GB/T28001:2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 50 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?



+8613687956390

cotton@fibercabl

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong
province,China