GYTA GYTS 48 Core Armored Single Mode Fiber Optic Cable G652D

Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

· Certification: ISO/CE/ROSH

GYTA Model Number: • Minimum Order Quantity: 2km • Price: negotiate

 Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

• Supply Ability: 100km



Product Specification

GYTA Item:

• Outdoor: Outdoor Fiber Optic Cable

G652D OR G652B • Fiber:

PΕ · Jacket Material: · Strength Member: Steel Armored: Aluminum

• Highlight: Armoured GYTS Fiber Optic Cable,

Outdoor GYTS Fiber Optic Cable, **GYTA Fiber Optic Cable G652D**



More Images



GYTA GYTS Fiber Optic Cable 48 Cores Armoured Single Mode Outdoor G652D


Product Specifications

Attribute	Value
Item	GYTA
Outdoor	Outdoor Fiber Optic Cable
Fiber	G652D OR G652B
Jacket Material	PE
Strength Member	Steel
Armored	Aluminum

Product Description

GYTA Armored Loose Tube Single Jacket/Single Armor fiber optic cables are designed to provide abundant fibers with the flexibility and diversity required for demanding contemporary installations, including ducts and underground conduits.



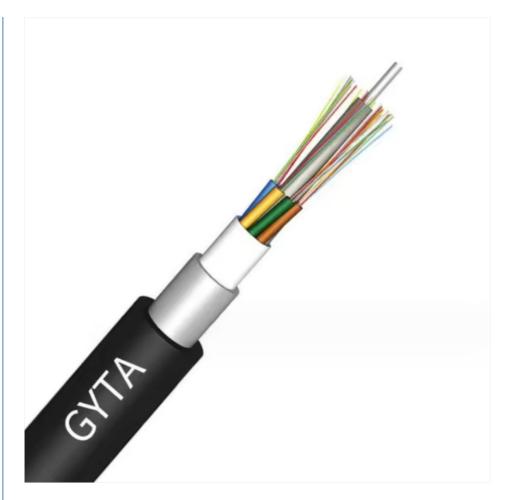

Key Features

Low dispersion and reduced attenuation for high-quality signal transmission


Optimized design and manufacturing process for effective fiber excess length management

Corrugated steel tape armor provides excellent protection against moisture and crushing


Slim profile and lightweight for easy handling and installation

Operates in a broad temperature range from -40°C to +60°C

Cable Structure

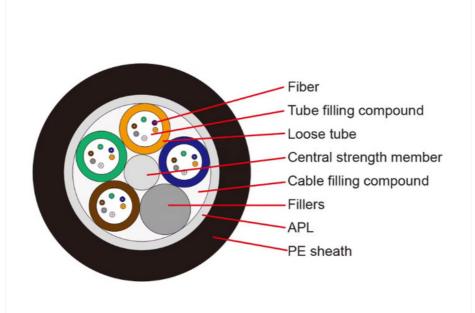

GYTA Fiber Optic Cable

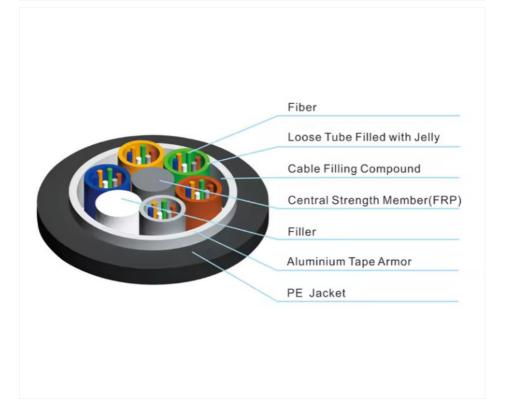

Fiber: 2-288 fiber, multi-loose tube gel-filled

 $\textbf{Central Strength Member:} \ \mathsf{Fiberglass} \ \mathsf{reinforced} \ \mathsf{Plastic} \ (\mathsf{FRP}) \ \mathsf{or} \ \mathsf{steel} \ \mathsf{wire}$

Armor: Aluminum Tape Armor


Outer Jacket: Black UV Polyethylene(PE)

Technical Parameters

Fiber count	Struc	Fibers per tube	Loose tube diameter (mm)	CSM diameter/pad diameter (mm)	Nominal thickness of outer jacket (mm)	Cable diameter/Height (mm)	Cable weight (kg/km)
4	1+5	4	1.8±0.1	1.4/1.4	1.4	9.0±0.3	80
6	1+5	6	1.9±0.1	1.4/1.4	1.4	9.0±0.3	80
8	1+5	8	1.9±0.1	1.4/1.4	1.4	9.0±0.3	80
12	1+5	6	1.9±0.1	1.4/1.4	1.4	9.0±0.3	80
24	1+5	6	1.9±0.1	1.4/1.4	1.4	9.0±0.3	85
36	1+6	12	2.2±0.1	1.6/1.6	1.6	9.7±0.3	100
48	1+5	12	2.2±0.1	1.6/1.6	1.6	9.7±0.3	105
60	1+5	12	2.2±0.1	1.6/1.6	1.6	9.7±0.3	110
72	1+6	12	2.2±0.1	2.0/2.0	1.6	10.6±0.3	122
96	1+8	12	2.2±0.1	1.6/3.5	1.6	12.0±0.3	160
144	1+12	12	2.2±0.1	2.0/6.4	1.8	15.6±0.3	240
216	1+6+ 12	12	2.2±0.1	2.2/2.2	1.8	16.0±0.3	270
288	1+9+ 15	12	2.2±0.1	2.2/4.3	2.0	18.2±0.3	282

Our Factory



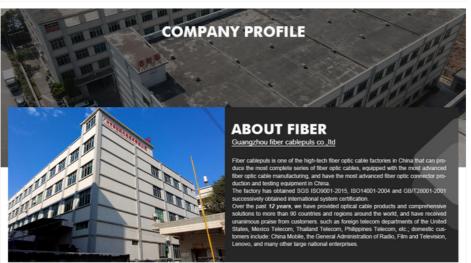



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM





HOT-SALE PRODUCT





TRANSPORT&PAY









Frequently Asked Questions

Why choose us?

We are a manufacturer located in Guangzhou, China, operating since 2011. We primarily serve the domestic market with a workforce of 11-

50 professionals.

How can we guarantee quality?

We conduct pre-production samples before mass production and perform final inspections before shipment to ensure quality standards.

Can you send products to my country?

Yes, we can. If you don't have your own shipping forwarder, we can assist with logistics.

Can you do OEM for me?

We accept all OEM orders. Contact us with your design requirements and we'll provide a reasonable quote and create samples for

What services can we provide?

Delivery Terms: FOB, CIF, EXW

Payment Currency: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF Payment Type: T/T, L/C, D/P D/A, PayPal, Western Union, Escrow

Languages: English, Chinese



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China