Aerial Figure 8 Fiber Optic Cable 6 Core Small Figure 8 Self-Support Armoured (1x7) Fiber SM G.652.D

Basic Information

. Place of Origin: **GUANGZHOU/CHINA** . Brand Name: PUNAISGD/CABLEPULS

ISO/CE/ROSH · Certification: GYTC8S Model Number: • Minimum Order Quantity: 2km • Price: negotiate

· Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25 days

Payment Terms: 30% TT as deposit, 70% Balance before

shipping

• Supply Ability: 100km



Product Specification

. Type: GYTC8S · Aromored: Steel Tape PΕ • Out Sheath Material: • Installation Method: Aerial

-40°C To +70°C • Operating Temperature:

Application: Outdoor Aerial Installation

• Highlight: Small Figure 8 Fiber Optic Cable,

Self-Support Armoured Fiber Optic Cable



Product Description

Aerial Figure 8 Fiber Optic Cable 6 Core Small Figure 8 Self-Support Armoured (1x7) Fiber SM G.652.D

Products Description





Small Figure 8 Armored cables are self-supporting cable designed for aerial installation. The optical fiber cable design provides easy and economical one-step installation and stable performance over a wide temperature range and is compatible with any telecommunication optical fiber cable. The cable inside loose tube filled with a water-resistant filling compound or design for water blocked with water blocking material in side cable. The cable protect animal by corrugated steel armored around the cable core save cost maintenance or use for long term some applications.

Standard packing(wooden) 4,000M/Reel.

Details Images



Technical Data:


Item	Contents	Value					
	Fiber Count	2	4	6	12	18	2 4
Loose Tube	Outer diameter (mm)	2.8	2.8	2.8	2.8	3.2	3. 2
Steel Wire	Material	Galvanized steel wire					
	Diameter (mm)	7*0.8					
Sheath	Material	PE					
	Thickness (mm)	Nominal:0.8					
Cable diameter(mm)Approx.		4.4/*9.5m m	4.4/*9.5m m	4.4/*9.5m m	4.4/*9.5m m	4.6/*9.5m m	5 m m
Cable weight(kg/km)Approx.		66	66	66	66	68	6 8
Operating temperature range(°C)		-40~+70					
Tensile Strength Short/ Long Term(N)		1500/600					

Crush resistance short/long term (N/100mm)

1000/300

The colour arrangement of fibre and tube is specified in the colour identification table. Other structure and fibre count are also available according to customer requirements

Company Profile

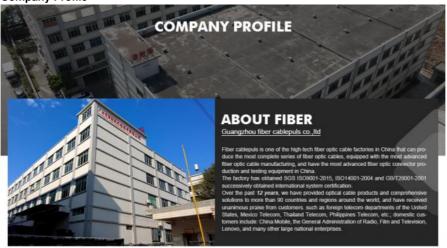



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM





HOT-SALE PRODUCT





FAQ

1. Why choose us?

We are manufacturer, Located in Guangzhou, China, started from 2011, sell to Domestic Market (100.00%). There are total about 11-50 people in our factory.

2. how can we guarantee quality?

Always a pre-production sample before mass production;

Always final Inspection before shipment;

3. Can you send products to my country?

Sure, we can. If you do not have your own ship forwarder, we can help you.

4. Can you do OEM for me?

We accept all OEM orders, just contact us and give me your design we will offer you a reasonable price and make samples for you.

5. what services can we provide?

Accepted Delivery Terms: FOB,CIF,EXW

Accepted Payment Currency: USD, EUR, JPY, CAD, AUD, HKD, GBP, CNY, CHF; Accepted Payment Type: T/T,L/C,D/P D/A,PayPal,Western Union,Escrow;

Language Spoken: English, Chinese







cotton@fibercablepuls.com



fiberoptical-cables.com