




Anti Rodent Fiber Optic Cable FRP Rod Armoured 12 Cores 24 Cores 144 Cores GYFTY83

Our Product Introduction

for more products please visit us on fiberoptical-cables.com


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD
- Certification: ISO/CE/ROSH
- Model Number: GYFTY83-48B1.3
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km



Product Specification

- Item No: GYFTY83-48B1.3
- Rodent Protection: Aramid Yarn/FRP Rod
- Jacket Color: Black
- Jacket Material: Polyethylene
- Fiber Type: G.652D
- Armor Type: Unarmored
- Highlight: 24 cores Fiber Optic Cable,
GYFTY83 Fiber Optic Cable,
144 cores Fiber Optic Cable



More Images



Product Description

Anti Rodent Fiber Optic Cable FRP Rod Armoured 12cores 24 Cores 144 Cores


Guangzhou fiber cable puls FIBER provides a full range of customized fiber optic cable packaging solutions carefully matching your unique needs.

Starting with customized packaging printing, your brand LOGO, safety warnings or specific information can be printed directly on the packaging carton boxes and packaging spool, which not only enhances the brand image, but also ensures the accuracy and efficiency of on-site identification.

Whether it is wooden reel that pursue natural texture and environmental protection concepts, or iron reel that emphasize sturdiness and durability, we present them all to ensure the best protection of optical cables during transportation and storage.

Besides, for large-scale deployment and international transportation needs, we provide flexible container packaging options - whether it is a standard 20-foot container, suitable for compact space and flexible deployment; or a spacious 40-foot container, which can meet the needs of large-scale projects.

Our Product Introduction

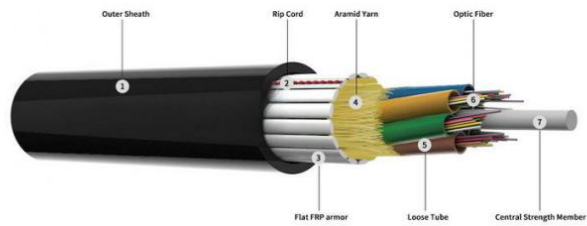

GYTA33 Cable Place Order Information




CABLE DATA

Cable Type		Length (M)					Fiber Count	Outer Diameter (mm)
		1000M	2000M	3000M	4000M	5000M		
GYFTY83	Net Weight (kg)	80	160	240	320	400	2-60 fibers	9.5mm
	Gross Weight (kg)	90	180	270	360	450		
	Reel Size (cm)	60*60	80*70	90*70	100*70	110*70		
	Net Weight (kg)	139	324	509	694	879	74-96 fibers	12mm
	Gross Weight (kg)	154	354	554	754	954		
	Reel Size (cm)	80*70	100*70	120*70	130*80	140*80		
	Net Weight (kg)	210	480	750	1020	1290	144 fibers	14.5mm
	Gross Weight (kg)	240	540	840	1140	1440		
	Reel Size (cm)	90*70	120*70	140*80	150*80	160*80		
	Net Weight (kg)	250	570	1850			288 fibers	19mm
	Gross Weight (kg)	280	630	490				
	Reel Size (cm)	110*70	140*80	160*80				

No.	Items	Unit	Specification
			G.652D
1	Mode Field Diameter	μm	9.2±0.4
		μm	10.4±0.8
2	Cladding Diameter	μm	125.0±1.0
3	Cladding Non-Circularity	%	≤1.0
4	Core-Cladding Concentricity Error	μm	≤0.5
5	Coating Diameter	μm	245±5
6	Coating Non-Circularity	%	≤6.0

7	Cladding-Coating Concentricity Error	μm	≤12.0
8	Cable Cutoff Wavelength	nm	λ _c ≤1260
9	Attenuation(max.)	1310nm	dB/km ≤0.35
		1550nm	dB/km ≤0.21
		1380nm	dB/km ≤0.35
		1625nm	dB/km ≤0.24
10	Attenuation and wavelength	1310nm 1285-1330nm	dB/km ≤0.04
		1550nm 1525-1575nm	dB/km ≤0.03
		1550nm 1480-1580nm	dB/km ≤0.05
11	Dispersion	1288-1339nm	ps/(nm.km) ≥-3.5, ≤3.5
		1271-1360nm	ps/(nm.km) ≥-5.3, ≤5.3
		1480-1580nm	ps/(nm.km) ≤20
		1550nm	ps/(nm.km) ≤18
12	Zero dispersion wavelength	Nm	1300-1324
13	Zero dispersion slope	ps/(nm ² ·km)	≤0.092
14	Typical value	ps/(nm ² ·km)	0.04
15	Largest individual fiber	Ps/√ km	0.2
16	Link design values	Ps/√ km	0.1
17	Two way average	1310nm-1550	≤0.01dB

Production Supplier Profile

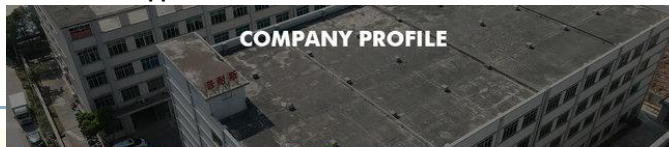

COMPANY PROFILE



ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained ISO9001:2015, ISO14001:2004 and GB/T28001:2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



+8613687956390

cotton@fibercabl



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan International/Guangzhou city,Guangdong province,China