



Dierct Buried Cable 24 Core GYTY53 Fiber Optic Cable

Our Product Introduction

Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GYFTY53-24B1.3
- Minimum Order Quantity: 2km
- Price: negotiate
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km



Product Specification

- Item No.: GYFTY53-24B1.3
- Jacket Color: Black
- Jacket Material: PE/LSZH
- Fiber Type: G.652D
- Installation Method: Direct Buried
- Outer Diameter: 13 Mm
- Armored Type: Single Armor Double Jacket
- Armored Material: Steel Tape
- Highlight: **24 Core GYTY53 Fiber Optic Cable ,
Dierct Buried GYTY53 Fiber Optic Cable**



for more products please visit us on fiberoptical-cables.com

Product Description

Dierct Buried Cable 24 Core GYTY53 Fiber Optic Cable

Low dispersion and attenuation

Proper design, precise control for fiber excess length and distinct stranding process render the cable excellent mechanical and environmental properties

Double-jacket structure make cable have nice properties of moisture resistance and crush resistance



With small cable diameter, light cable weight, easily to lay

Operating Temperature : -40 ~ +60 °C

Steel wire strength.filler protect tube fiber.steel tape armord.

Good ultra violet radiation resistant property.

GYFTY53 Cable Place Order Information

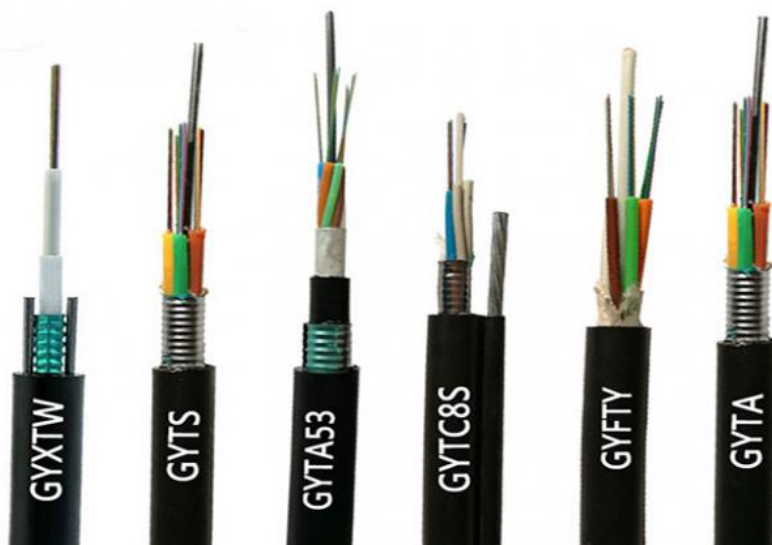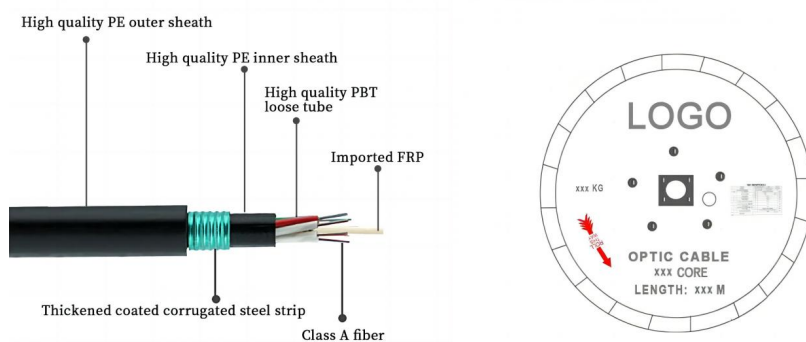

CABLE DATA

Fiber count	Structure	Fiber s per tube	Loose tube diameter (mm)	CSM diameter/p ad diameter (mm)	Nominal Thickne ss of outer jacket (mm)	Cable diameter/ Height (mm)	Cable weight (kg/km)
4	1+5	4	1.8±0.1	1.4/1.4	1.6	11.5±0.2	135
6	1+5	6	1.9±0.1	1.4/1.4	1.6	11.5±0.2	135
8	1+5	8	1.9±0.1	1.4/1.4	1.6	11.5±0.2	135
12	1+5	6	1.85±0.1	1.4/1.4	1.6	11.5±0.2	135
24	1+5	6	1.85±0.1	1.4/1.4	1.6	11.5±0.2	135
36	1+5	12	1.9±0.1	1.6/1.6	1.6	11.5±0.2	135
48	1+5	12	1.95±0.1	1.5/1.5	1.6	12.2±0.2	145
60	1+5	12	1.95±0.1	1.5/1.5	1.6	12.2±0.2	145
72	1+6	12	1.95±0.1	2.0/2.0	1.6	12.2±0.2	160
96	1+8	12	1.95±0.1	1.6/3.2	1.6	13.8±0.2	180
144	1+12	12	1.95±0.1	1.8/5.7	1.6	16.7±0.3	230

Fiber Parameters

No.	Items	Unit	Specific ation
			G.652D
1	Mode Field Diameter	1310nm	9.2±0.4
		1550nm	10.4±0.8
2	Cladding Diameter	μm	125.0±1.0
3	Cladding Non-Circularity	%	≤1.0
4	Core-Cladding Concentricity Error	μm	≤0.5
5	Coating Diameter	μm	245±5
6	Coating Non-Circularity	%	≤6.0
7	Cladding-Coating Concentricity Error	μm	≤12.0
8	Cable Cutoff Wavelength	nm	λ _{cc} ≤1260
9	Attenuation(max.)	1310nm	≤0.35
		1550nm	≤0.21
		1380nm	≤0.35
		1625nm	≤0.24
10	Attenuation and wavelength	1310nm 1285-1330nm	≤0.04
		1550nm 1525-1575nm	≤0.03
		1550nm 1480-1580nm	≤0.05
11	Dispersion	1288-1339nm	≥-3.5, ≤3.5
		1271-1360nm	≥-5.3, ≤5.3
		1480-1580nm	≤20
		1550nm	≤18
12	Zero dispersion wavelength	Nm	1300-1324
13	Zero dispersion slope	ps/(nm ² •km)	≤0.092
14	Typical value	ps/(nm ² •km)	0.04
15	Largest individual fiber	Ps/√ km	0.2
16	Link design values	Ps/√ km	0.1
17	Two way average	1310nm-1550	≤0.01dB

Production Supplier Profile



COMPANY PROFILE



ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001-2015, ISO14001-2004 and GB/T28001-2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.

How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.



guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan International Guangzhou city, Guangdong province, China