




10km Drones Bare Optical Fiber 0.4mm Tight-buffered SM Single Mode Invisible Fibre Bare Optical Fiber For Communication


Basic Information

- Place of Origin: GUANGZHOU
- Brand Name: PUNAISGD
- Model Number: YXGX01
- Minimum Order Quantity: 10km
- Price: negotiate
- Packaging Details: Spool
- Delivery Time: 7DAYS
- Payment Terms: T/T
- Supply Ability: 100000KM



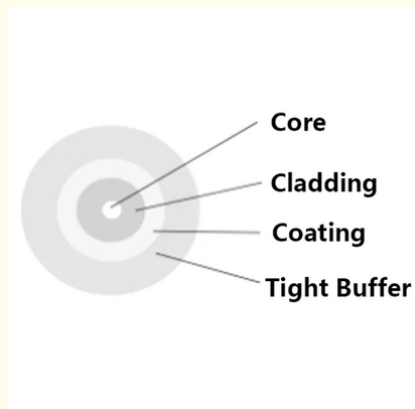


Product Specification

- Highlight: SM Single Mode Bare Optical Fiber,
0.4mm Bare Optical Fiber,
10km Bare Optical Fiber

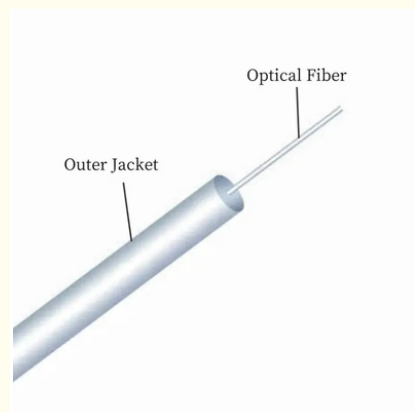

More Images



Product Description

10km Drones Bare Optical Fiber 0.4mm Tight-buffered SM Single Mode invisible Fibre Bare Optical Fiber for Communication

Model Number

Drones Bare Optical Fiber

Place of Origin

Guangdong, China

Length

10km/Spool

Application

Drones

Fiber count


1

Tight-Buffer Diameter

0.4±0.01mm

Tight-Buffer Material

PVC

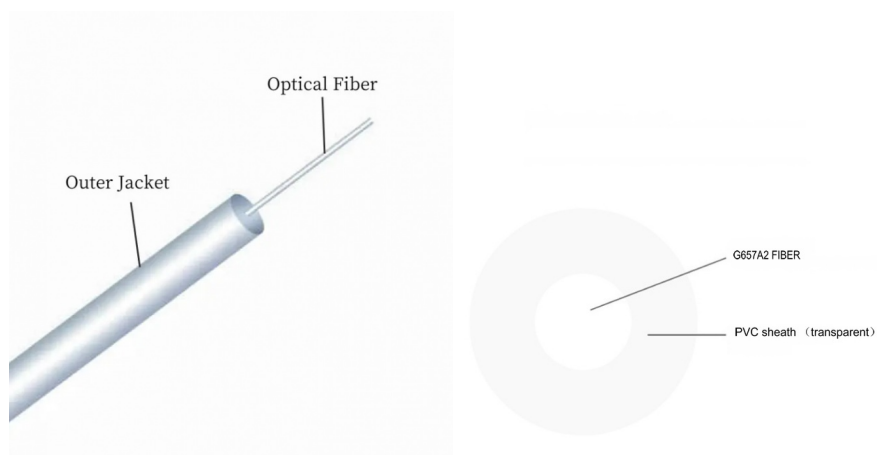

Fiber Parameters


No.	Items	Unit	Specification
			G.657A2
1	Mode Field Diameter	1310nm	μm 8.8±0.4
		1550nm	μm 9.8±0.5
2	Cladding Diameter		μm 125±0.7
3	Cladding Non-Circularity	%	≤0.7
4	Core-Cladding Concentricity Error	μm	≤0.5
5	Coating Diameter	μm	245±5
6	Coating Non-Circularity	%	≤6.0
7	Cladding-Coating Concentricity Error	μm	≤12.0
8	Cable Cutoff Wavelength	nm	λ _c ≤1260
9	Attenuation(max.)	1310nm	dB/km ≤0.35
		1550nm	dB/km ≤0.21
10	Macro-Bending Loss	1turn×7.5mm radius @1550nm	dB ≤0.2
		1turn×7.5mm radius @1625nm	dB ≤0.5

Cable Parameters

Items	Specifications
Fiber count	1
Tight-Buffer	Diameter 0.4±0.01mm
	Material PVC
	Material Transparent

Mechanical and Environmental Characteristics

Items	Unit	Specifications
Min. Bend Radius(Dynamic)	mm	20D
Min. Bend Radius(Static)	mm	10D
Working temperature	°C	-20~60
Storage temperature	°C	-20~60

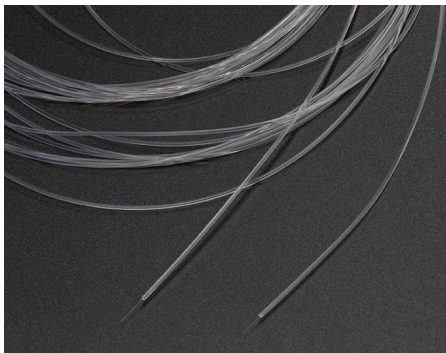

guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong
province,China