



Aerial Figure 8 Fiber Optic Cable 4/6/8/12/24 Core Outdoor Self Supporting Central Loose Tube Fiber Optic Cable GYXTC8S

Our Product Introduction

for more products please visit us on fiberoptical-cables.com


Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD
- Certification: ISO/CE/ROSH
- Model Number: gyt8s-24B1.3
- Minimum Order Quantity: 2km
- Price: negotiable
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km





Product Specification

- Item NO.: Gyt8s-24b1.3
- TYPE: FIG.8 Shape
- Loose Tube Material: PBT
- Strength Member: FRP& STEEL WIRES
- Application: OVERHEAD
- Fiber: G652D
- Highlight: GYXTC8S Figure 8 Fiber Optic Cable, Figure 8 Fiber Optic Cable Aerial



More Images



Product Description

Aerial Figure 8 Fiber Optic Cable 4/6/8/12/24 OUTDOOR SELF-SUPPORTING FIGURE 8 CENTRAL LOOSE TUBE FIBER OPTIC CABLE GYXTC8S

Figure 8 aerial fiber optic cable has great performance of tension resistance and self-supporting. metallic central strength member into a compact and circular cable core, and the water-blocking materials are distributed into interstices of it. After a PSP is applied around the cable core, this part of cable accompanied with the stranded wires as the supporting part are completed with a PE sheath to be a figure -8 structure.

Suitable for Aerial installation except on power line


Messenger wire provides required tensile Strength recommended for aerial application

Light weight cable construction design for ease of handling & installation

Local loop, metro, long-haul and broadband network



Available up to 144 Fibers

Our Product Introduction

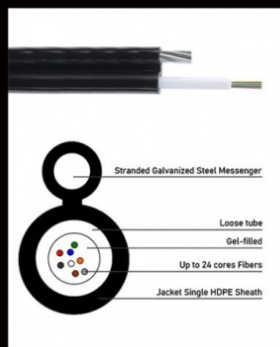

Model: GYTC8Y
 Messenger: 1.5mm Standed Galvanized Steel
 Messenger for Flexibility
 Fiber : Up to 24 cores, Gel filled
 Jacket: Single HDPE Sheath
 Armor: None
 Tension Strength: 1000(Short term)
 300(Long term)
 Cable Diameter: 5.1*10.2mm
 Package: 4km/drum
 Weight: 47KG/KM

Model: GYTC8S
 Messenger: 1.5mm Standed Galvanized Steel
 Messenger for Flexibility
 Fiber : Up to 24 cores, Gel filled
 Jacket: Single HDPE Sheath
 Armor: Steel Tape
 Tension Strength: 1000(Short term)
 300(Long term)
 Cable Diameter: 7.6*14.5mm
 Package: 4km/drum
 Weight: 117KG/KM



Model: GYTC8Y
 Messenger: 7*1.0mm Standed Galvanized Steel
 Messenger for Flexibility
 Fiber : Up to 288 cores, Gel filled
 Jacket: Single MDPE Sheath
 Water Block: Water Blocking or Gel-filled
 Armor: None
 Tension Strength: 3000(Short term)
 1000(Long term)
 Cable Diameter: 9.1*16.9mm
 Package: 4km/drum
 Weight: 142KG/KM


Model: GYTC8S
 Messenger: 7*1.0mm Standed Galvanized Steel
 Messenger for Flexibility
 Fiber : Up to 288 cores, Gel filled
 Jacket: Single MDPE Sheath
 Water Block: Water Blocking or Gel-filled
 Armor: Steel Tape, Thickness 1mm
 Tension Strength: 3000(Short term)
 1000(Long term)
 Cable Diameter: 9.5*17mm
 Package: 4km/drum
 Weight: 156KG/KM




GYTC8S Cable Place Order Information




Fiber count	6 core 8 core 12 core
Fiber Type:	G652D/G657A1/G657A2
Crush Resistance Long term:	300 (N/100MM)
Crush Resistance Short term:	1000(N/100MM)
Overall Diameter	7.8x4mm
Sheath	PE
Strand Steel wire	7*0.8mm
Sample Status	In stock

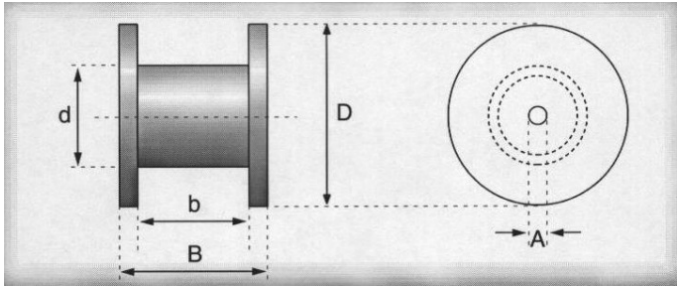

Production Supplier Profile

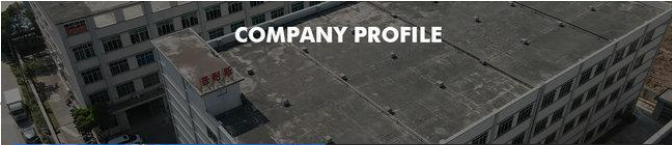

COMPANY PROFILE




ABOUT FIBER
Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained ISO 90001:2015, ISO 14001:2004 and GB/T28001:2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 50 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc., domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



+8613687956390 cotton@fibercabl



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: cotton@fibercablepuls.com
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China