₫

more products please visit us on fiberoptical-cables.com

Aerial Figure 8 Self-Supporting Armored Fiber Optic Cable GYTC8S With FRP Steel Wires

Basic Information

Place of Origin: GUANGZHOU/CHINA

Brand Name: PUNAISGD
Certification: ISO/CE/ROSH
Model Number: gytc8s-48B1.3
Minimum Order Quantity: 2km
Price: negotiable

Packaging Details: Wooden Spool /drum

• Delivery Time: 5-25days

• Payment Terms: 30%TT as deposit,70%Balance before

shipping. 100km



Product Specification


Supply Ability:

Item NO.: Gytc8s-48b1.3TYPE: FIG.8 ShapeLoose Tube Material: PBT

Strength Member: FRP& STEEL WIRESApplication: OVERHEAD

• Fiber: G652D

Highlight: GYTC8S Armored Fiber Optic Cable,
 Self Supporting Armored Fiber Optic Cable,
 Armored Fiber Optic Cable Figure 8



More Images



Product Description

Aerial Figure 8 Self-Supporting Armored Fiber Optic Cable Fibra Optica GYTC8S

GYTC8S/A Self-support Aerial FIG 8 Armored Outdoor Optical Fiber Cable

Fiber Counts: 2 cores -288 cores Structure: Figure 8 design, loose tube CSM(Central Strength Member): Stee

CSM(Central Strength Member): Steel wire (or FRP) Span customized: 80/100/120/150/200m etc.

Light-armored: Corrugated Steel Tape (aluminium tape optional)

SJSA: Single Jacket Single Armor Messenger: stranded steel wires 7*1.0mm Drum Length: 2km,3km,4km as request Application:

Self-supporting Aerial Installation

The 2-288 fibers are positioned in PBT loose tube filled with gel. Tubes (and fillers) are stranded around the central strength member (Steel or FRP) to form the cable core. The cable core is filled with water blocking compound and armored with corrugated steel tape (CST). Stranded steel wires support as the messenger. Finally, a figure-8 PE outer jacket is extruded.



- Figure-8 design, easy for self-supporting aerial installation, reducing installation costs
 Small size, light weight and soft, easy for installation
 Hydrolysis resistant loose tube

- Trydrolysis resistant loose tabe
 Tube gel ensures critical protection of fiber
 Corrugated steel tape(CST) enhancing moisture-proof










GYTC8S Cable Place Order Information



| Fiber count | 6 core 8 core 12 core |
|------------------------------|-----------------------|
| Fiber Type: | G652D/G657A1/G657A2 |
| Crush Resistance Long term: | 300 (N/100MM) |
| Crush Resistance Short term: | 1000(N/100MM) |
| Overall Diameter | 7.8x4mm |
| Sheath | PE |
| Strand Steel wire | 7*0.8mm |
| Sample Status | In stock |

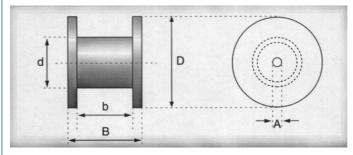

Production Supplier Profile





+8613687956390 cotton@fibercabl



OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM





- How do I place an OEM or customized order?

 1) Send your purchase intention to our email: cotton@fibercablepuls.com

 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.

 3) Sign the contract or Proforma Invoice.

 4) After receiving your deposit, we will start to arrange the production.

 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong province,China