




## Direct Burial Cable 96-144 Core GYTA53 Direct Buried Fiber Optic Cable / Submarine Optical Cable

Our Product Introduction

### Basic Information

- Place of Origin: GUANGZHOU/CHINA
- Brand Name: PUNAISGD/CABLEPULS
- Certification: ISO/CE/ROSH
- Model Number: GYTA53-36B1.3
- Minimum Order Quantity: 2km
- Price: negotiable
- Packaging Details: Wooden Spool /drum
- Delivery Time: 5-25days
- Payment Terms: 30%TT as deposit,70%Balance before shipping.
- Supply Ability: 100km

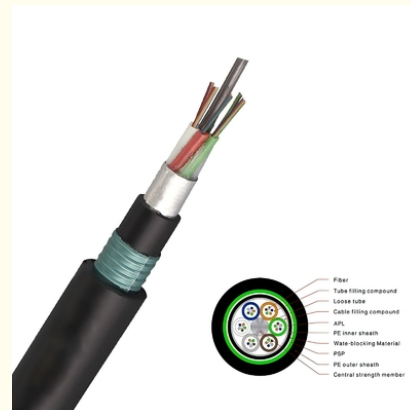


### Product Specification

- Item No.: GYTA53-36B1.3
- Jacket Material: PE/LSZH
- Fiber Type: G.652D
- Armored Type: Steel Tape/Aluminum
- Application: Directly Buried
- Fiber Count: 144 Cores
- Armor Type: Steel Tape/ALUMINUM TAPE
- Highlight: **Submarine Optical Cable,  
GYTA53 Direct Buried Cable,  
96-144 Core Direct Buried Cable**



### More Images




for more products please visit us on [fiberoptical-cables.com](http://fiberoptical-cables.com)

## Product Description

### Direct Burial Cable 96-144 Core GYTA53 Direct Buried Fiber Optic Cable / Submarine Optical Cable

In the GYTA53 cable, single-mode/multimode fibers are positioned in the loose tubes, the tubes are filled with water blocking filling compound. Tubes and fillers are stranded around the strength member into a circular cable core. An Aluminum Polyethylene Laminate (APL) is applied around the core. Which is filled with the filling compound to protect it. Then the cable is completed with a thin PE sheath. After PSP is applied over the inner sheath, the cable is completed with a PE outer sheath.

Armored Loose Tube Double Jacket/Single Armor fiber optic cables are designed to provide high fiber counts with the flexibility and versatility required for today's most demanding installations, including direct buried. With fiber counts up to 288 and S-Z strand designs.

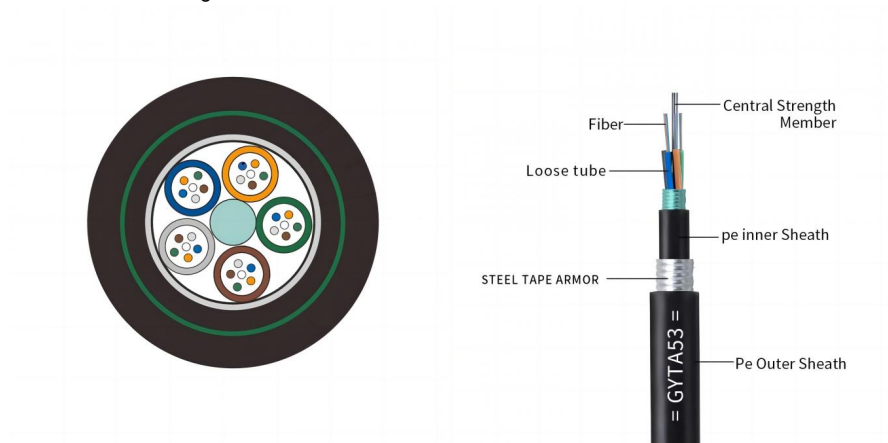

### GYTA53 Cable Place Order Information



#### CABLE DATA

fiber count	fibers per tube	loose tube diameter	CSM diameter	nominal tickness of outer jacket	cable diameter	cable weight
4	4	1.8±0.1	1.4/1.4	1.6	11.5±0.2	140
6	6	1.9±0.1	1.4/1.4	1.6	11.5 ±0.2	140
8	8	1.9±0.1	1.4/1.4	1.6	11.5 ±0.2	140
12	6	1.9±0.1	1.4/1.4	1.6	11.5 ±0.2	140
24	6	1.9±0.1	1.4/1.4	1.6	11.5±0.2	140
36	12	1.9±0.1	1.6/1.6	1.6	11.5±0.2	140
48	12	2.2±0.1	1.6/1.6	1.6	12.2±0.2	140
72	12	2.2±0.1	1.6/3.5	1.6	12.2±0.2	150
96	12	2.2±0.1	2.0/2.0	1.6	12.2±0.2	160
144	12	2.2±0.1	2.0/6.4	1.8	13.8±0.2	180

#### Fiber Parameters

No.	Items	Unit	Specification
			G.652D

1	Mode Field Diameter	1310nm	μm	9.2±0.4
		1550nm	μm	10.4±0.8
2	Cladding Diameter		μm	125.0±1.0
3	Cladding Non-Circularity		%	≤1.0
4	Core-Cladding Concentricity Error		μm	≤0.5
5	Coating Diameter		μm	245±5
6	Coating Non-Circularity		%	≤6.0
7	Cladding-Coating Concentricity Error		μm	≤12.0
8	Cable Cutoff Wavelength		nm	$\lambda_{cc} \leq 1260$
9	Attenuation(max.)	1310nm	dB/km	≤0.35
		1550nm	dB/km	≤0.21
		1380nm	dB/km	≤0.35
		1625nm	dB/km	≤0.24
10	Attenuation and wavelength	1310nm 1285-1330nm	dB/km	≤0.04
		1550nm 1525-1575nm	dB/km	≤0.03
		1550nm 1480-1580nm	dB/km	≤0.05
11	Dispersion	1288-1339nm	ps/(nm.km)	≥-3.5, ≤3.5
		1271-1360nm	ps/(nm.km)	≥-5.3, ≤5.3
		1480-1580nm	ps/(nm.km)	≤20
		1550nm	ps/(nm.km)	≤18
12	Zero dispersion wavelength		Nm	1300-1324
13	Zero dispersion slope		ps/(nm <sup>2</sup> •km)	≤0.092
14	Typical value		ps/(nm <sup>2</sup> •km)	0.04
15	Largest individual fiber		Ps/√ km	0.2
16	Link design values		Ps/√ km	0.1
17	Two way average	1310nm-1550		≤0.01dB


### Cable Marking&Fibers Colors

COMPANY Fiber cable name N\*cores G.652D 2024 XXXXm

\*The marking is printed every 1 meter;

\*\*\*"G.652D" means ITU-T Rec. Low Water Peak (LWP) G.652 single mode optical fiber..

Also can according to client cable marking.

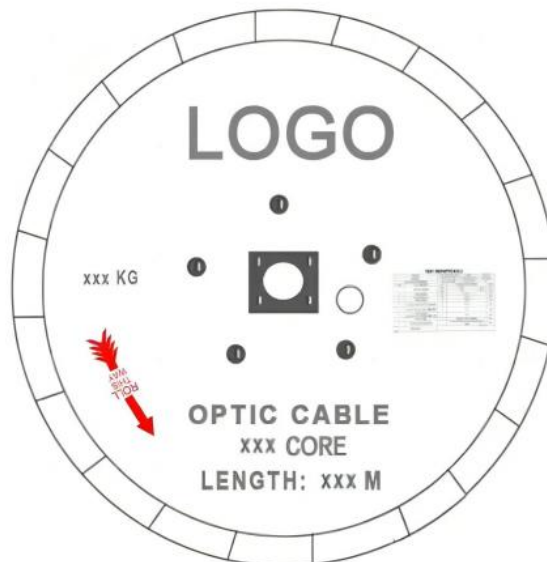

### Production Supplier Profile

## COMPANY PROFILE



### ABOUT FIBER

Guangzhou fiber cablepuls co.,ltd

Fiber cablepuls is one of the high-tech fiber optic cable factories in China that can produce the most complete series of fiber optic cables, equipped with the most advanced fiber optic cable manufacturing, and have the most advanced fiber optic connector production and testing equipment in China.

The factory has obtained SGS ISO9001-2015, ISO14001-2004 and GB/T28001-2001 successively obtained international system certification.

Over the past 12 years, we have provided optical cable products and comprehensive solutions to more than 90 countries and regions around the world, and have received unanimous praise from customers, such as foreign telecom departments of the United States, Mexico Telecom, Thailand Telecom, Philippines Telecom, etc.; domestic customers include: China Mobile, the General Administration of Radio, Film and Television, Lenovo, and many other large national enterprises.



### OUR PRODUCTION CAPACITY AND QUALITY CONTROL SYSTEM



#### How do I place an OEM or customized order?

- 1) Send your purchase intention to our email: [cotton@fibercablepuls.com](mailto:cotton@fibercablepuls.com)
- 2) Our sales team will contact you to confirm the product specification, packaging, printing, quantity, and other specific information.
- 3) Sign the contract or Proforma Invoice.
- 4) After receiving your deposit, we will start to arrange the production.
- 5) 2 weeks before the completion of production, we will notify you to start contacting shipping.



guangzhou fiber cablepuls co ltd



+8613687956390



cotton@fibercablepuls.com



fiberoptical-cables.com

925-926, Building B1, No. 2 Chuanghui Avenue, Yonghe Yushan InternationalGuangzhou city,Guangdong  
province,China